JOCHA14B-D8P/S Series

Rev.A.1.0

The products are 10MBd high-speed opto-couplers in a plastic DIP8 package with diff

(Temperature=25°C)

Parameter		Symbol	Value	Unit
Input	Forward Current	I_F	50	mA
	Peak Forward Current	I_{FP}	1	A
	Reverse Voltage	V_R	6	V
	Input Power Dissipation	P_D	100	mW
Output	Supply Voltage	V_{CC}	7	V
	Output Voltage	V_O	7	V
	Output Current	I_O	50	mA
	Output Power Dissipation	P_O	85	mW
Total Power Dissipation		P_{tot}	200	mW
Isolation Voltage		V_{iso}	5000	Vrms
Operating Temperature		T_{opr}	-40~110	
Junction Temperature		T_j	125	
Storage Temperature		T_{stg}	-55~125	
Soldering Temperature		T_{sol}	260	

: 100μs pulse, 100Hz frequency

: AC for 1minute, R.H.=40~60%


(Temperature=25°C)

Parameter		Symbol	Condition	Min.	Typ.	Max.	Unit
Input	Forward Voltage	V_F	I_F=10mA	-	1.35	1.6	V
	Reverse Current	I_R	V_R=6V	-	-	1	μA
	Input Capacitance	C_{in}	V=0, f=1MHz	-	34	-	pF
Output	High Level Output Current	I_{OH}	I_F=250μA, V_{CC}=3.3V, V_O=3.3V, V_E=2V	-	5	100	μA
	High Level Supply Current	I_{CCH}	V_{CC}=3.3V, I_F=0mA, V_E=0.5V	-	-	10	mA
	Low Level Supply Current	I_{CCL}	V_{CC}=3.3V, I_F=10mA, V_E=0.5V	-	-	13	mA

	Logic Low Output Voltage	V_{OL}	I_F=5mA, I_O=13mA, V_{CC}=3.3V, V_E=2V	-	0.3	0.6	V
	Isolation Resistance	R_{ISO}	DC500V 40~60%R.H.	-	10^{12}	-	Ω
	Floating Capacitance	C_{IO}	V=0, f=1MHz	-	1	-	pF
Switching Characteristics	Trigger LED Current	I_{FT}	V_{CC}=5V, V_O=V_{OL}	-	-	5	mA
	Propagation Delay Time to Logic Low	t_{PHL}	C_L=15pF, R_L=350Ω, I_F=7.5mA	-	-	60	ns
	Propagation Delay Time to Logic High	t_{PLH}		-	-	60	ns
	Pulse width distortion	$\|t_{PHL}-t_{PLH}\|$		-	-	35	ns
	Common Mode Transient Immunity at Logic High	CM_H	V_{CC}=3.3V, I_F=0mA, V_{CM}=1000V, R_L=350Ω	10	15	-	kV/μs
	Common Mode Transient Immunity at Logic Low	CM_L	V_{CC}=3.3V, I_F=10mA, V_{CM}=1000V, R_L=350Ω	10	15	-	kV/μs
	Rise Time	tr	C_L=15pF, R_L=350Ω, I_F=7.5mA	-	30	-	ns
	Fall Time	tf		-	30	-	ns

Characteristics	Symbol	Min.	Typ.	Max.	Unit
Operating Temperature	T_a	-40	-	85	
Supply Voltage	V_{CC}	2.7	-	3.6	V
		4.5	-	5.5	
Low Level Input Current	I_{FL}	0	-	250	μA

High Level Input Current	I_{FH}	7	-	15	mA
Output Pull-up Resistor	R_L	330	-	4k	Ω
Fan Out (at R_L=1kΩ per channel)	N	-	-	5	TTL Loads

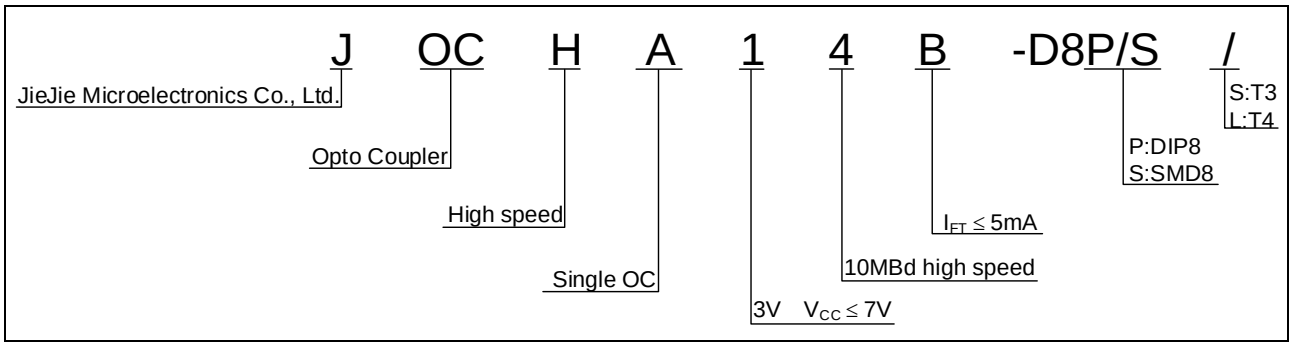

DIP	50 Units/Tube	40 Tubes/Inner box	5 Inner box/Outer box =10k Units
SMD	1200 Units/Reel	2 Reels/Inner box	5 Inner box/Outer box =12k Units

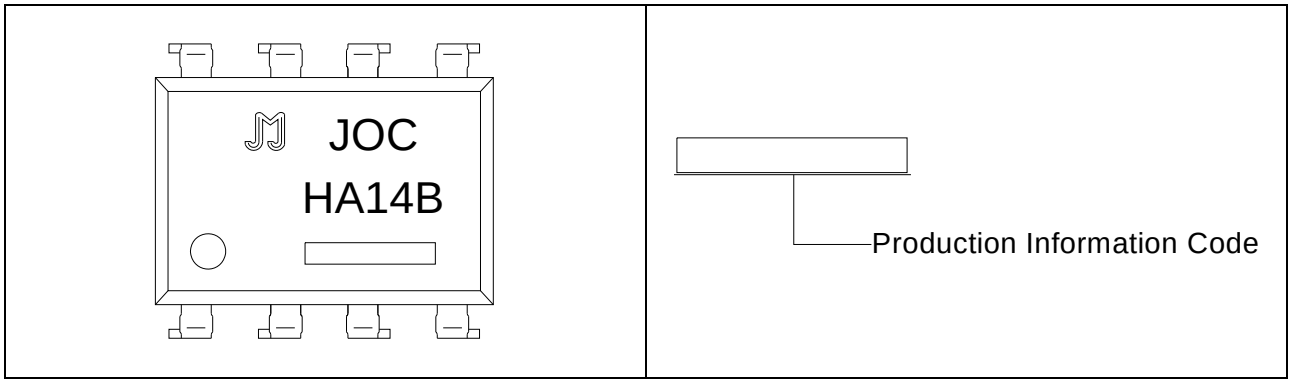


FIG.1: High Level Output Current vs. Ambient Temperature

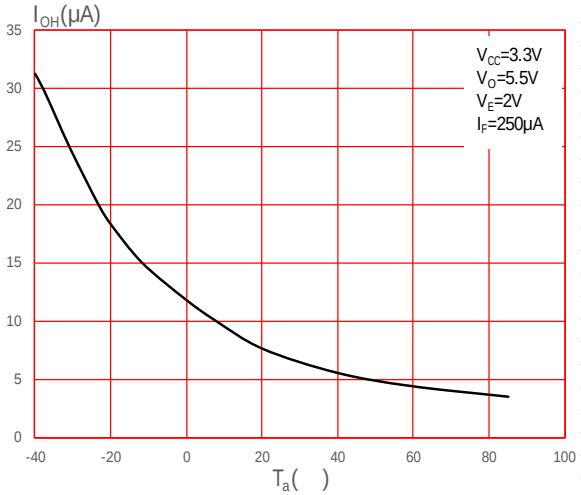


FIG.2: High Level Output Current vs. Ambient Temperature

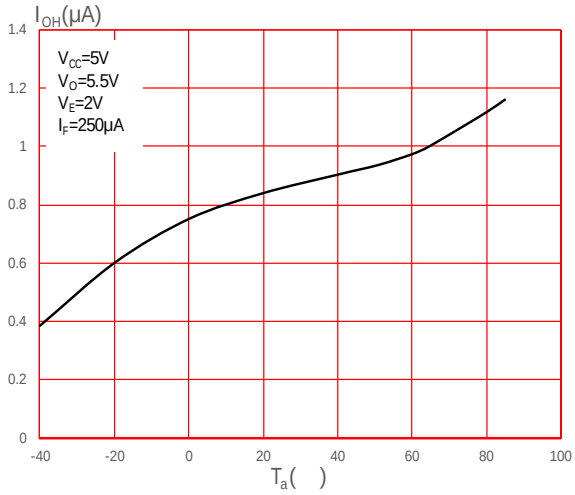


FIG.3: Input Threshold Current vs. Ambient Temperature

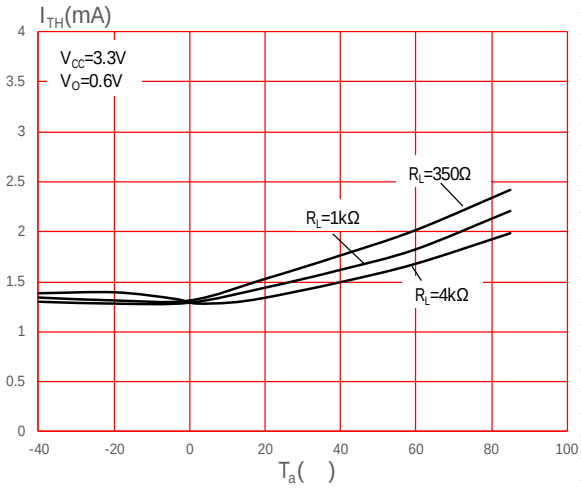


FIG.4: Input Threshold Current vs. Ambient Temperature

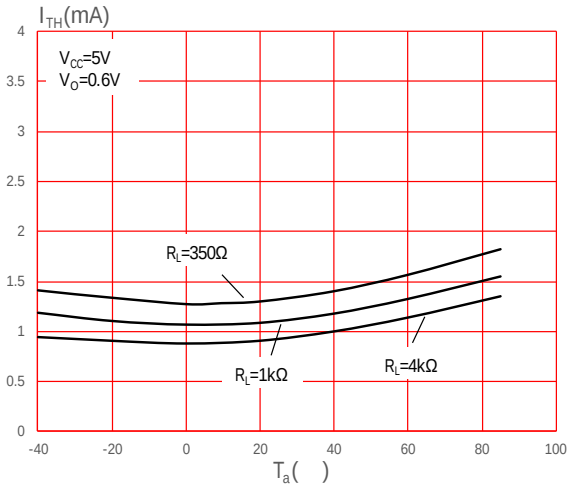


FIG.5: Low Level Output Voltage vs. Ambient Temperature

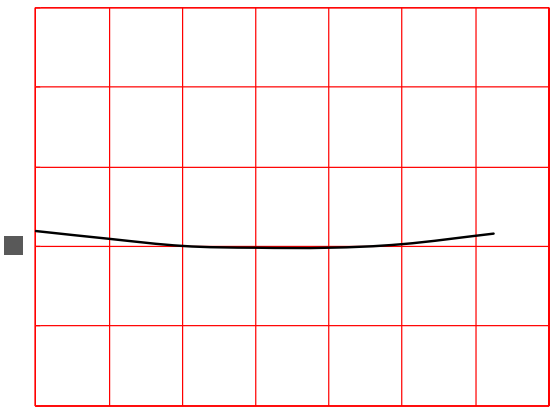


FIG.6: Low Level Output Voltage vs. Ambient Temperature

FIG.7: Low Level Output Current vs. Ambient Temperature

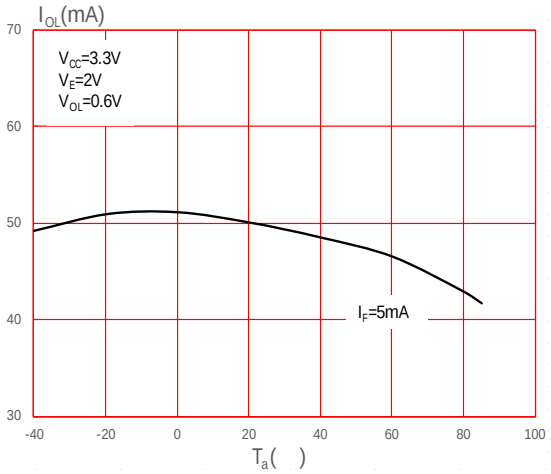


FIG.8: Low Level Output Current vs. Ambient Temperature

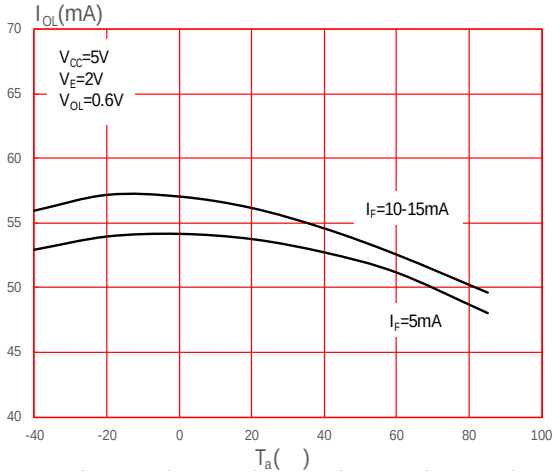


FIG.9: Input Forward Voltage vs. Input Forward Current

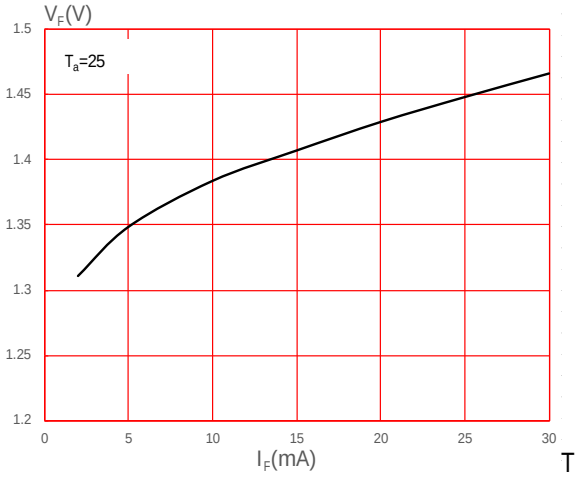


FIG.10: Forward Voltage vs. Ambient Temperature

FIG.13: Pulse Width Distortion vs. Ambient Temperature

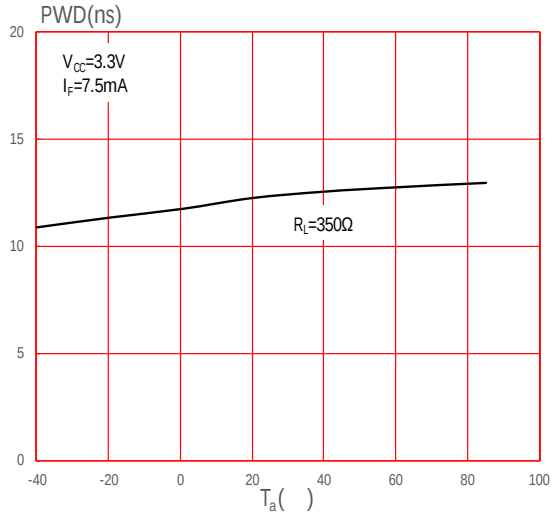


FIG.14: Pulse Width Distortion vs. Ambient Temperature

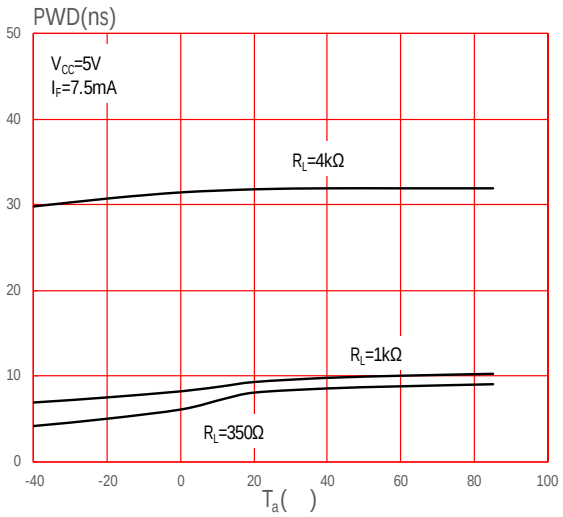


Fig.15: Test Circuit for TPHL and TPLH

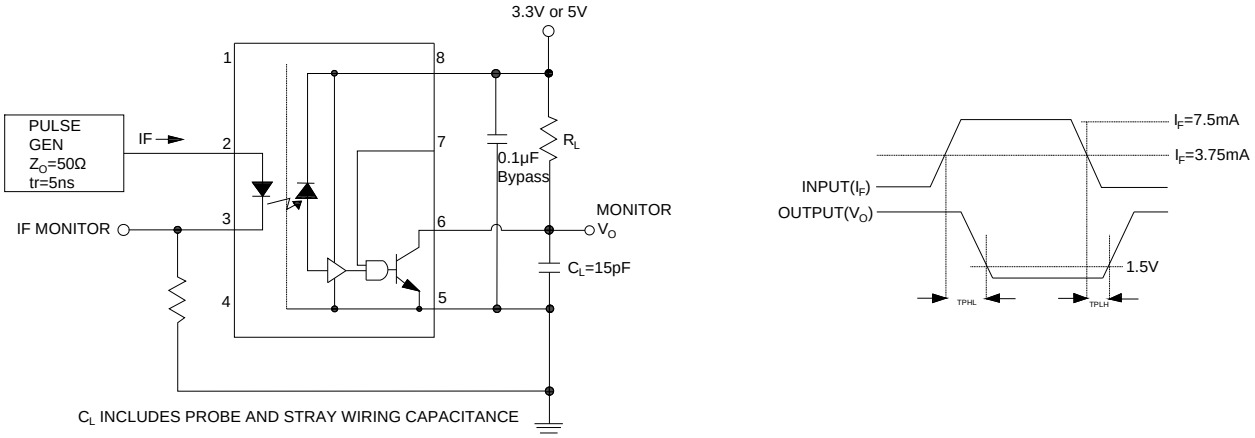


Fig.16: Single Channel Test Circuit for Common Mode Transient Immunity



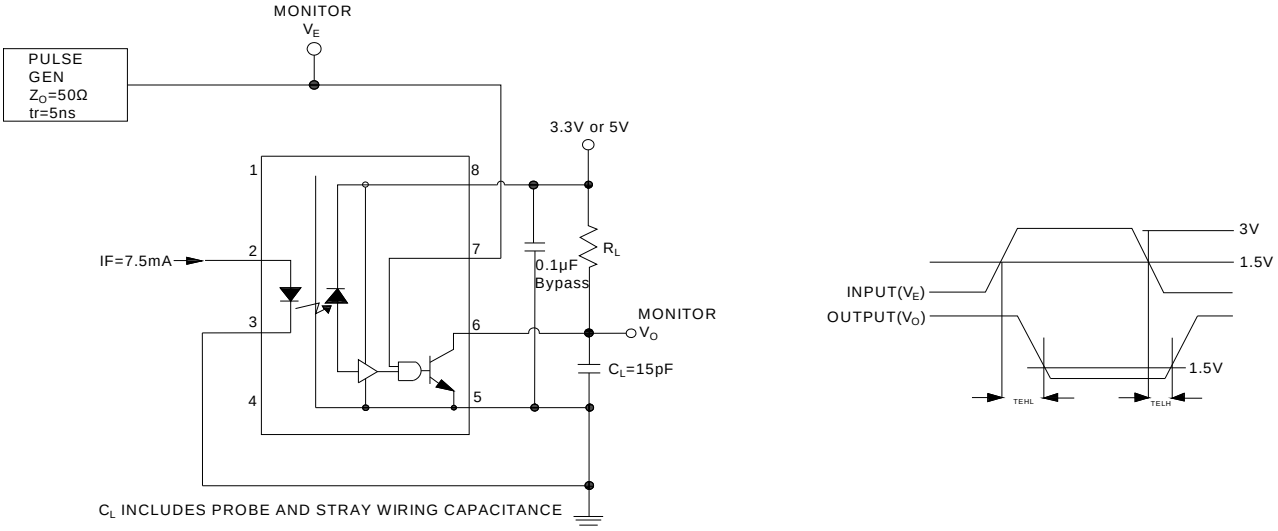



Fig.17: Single Channel Test Circuit for Common Mode Transient Immunity

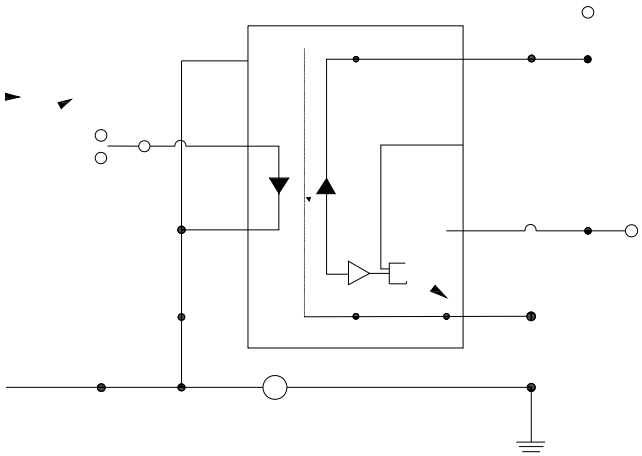


Standard DIP Type:

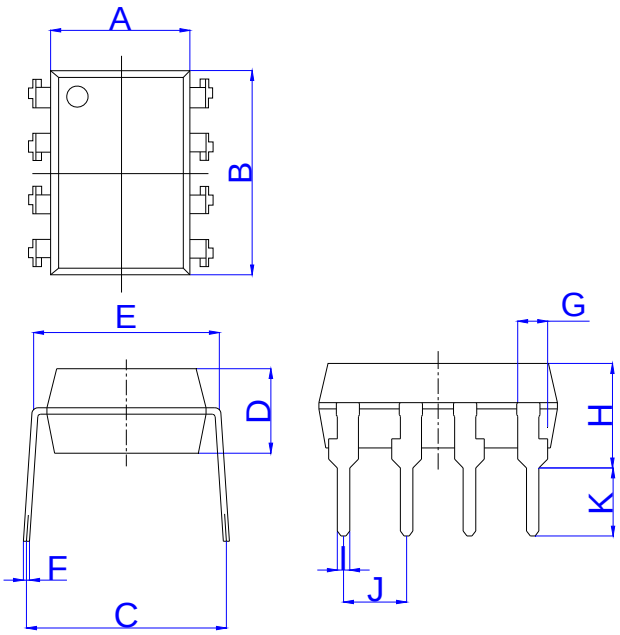


Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	6.20		6.60	0.244		0.260
B	9.40		9.80	0.370		0.386
C	7.15		8.95	0.281		0.352
D	3.20		3.60	0.126		0.142
E	7.32		7.92	0.288		0.312
F	0.15		0.35	0.006		0.014
G	0.90		1.50	0.035		0.059
H	3.90		4.50	0.154		0.177
I	0.40		0.60	0.016		0.024
J	2.29		2.79	0.090		0.110
K	2.24		3.24	0.088		0.128

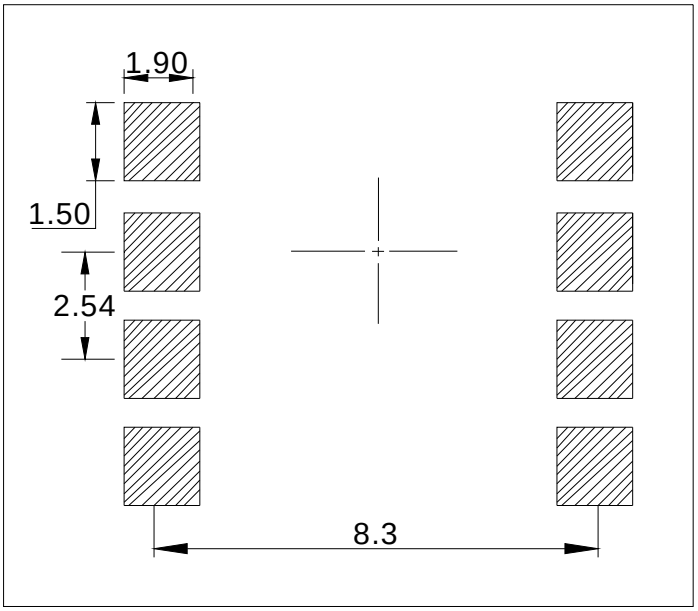


Standard DIP

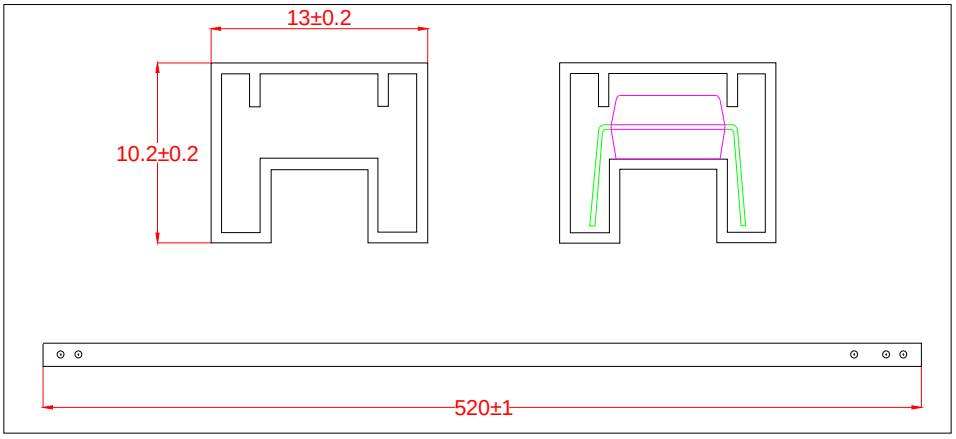


Option S

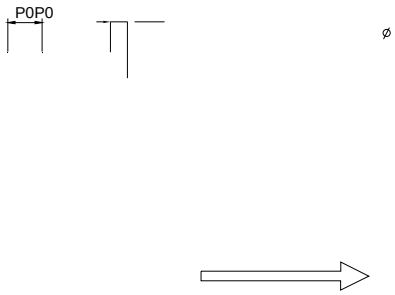

Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
D0		1.50	1.60		0.059	0.063
P0	3.90	4.00	4.10	0.154	0.157	0.161
P1	11.90	12.00	12.10	0.469	0.472	0.476
P2	1.90	2.00	2.10	0.075	0.079	0.083
E	1.65	1.75	1.85	0.065	0.069	0.073
F	7.40	7.50	7.60	0.291	0.295	0.299
T	0.35	0.40	0.45	0.014	0.016	0.018
W	15.90	16.00	16.20	0.626	0.630	0.638

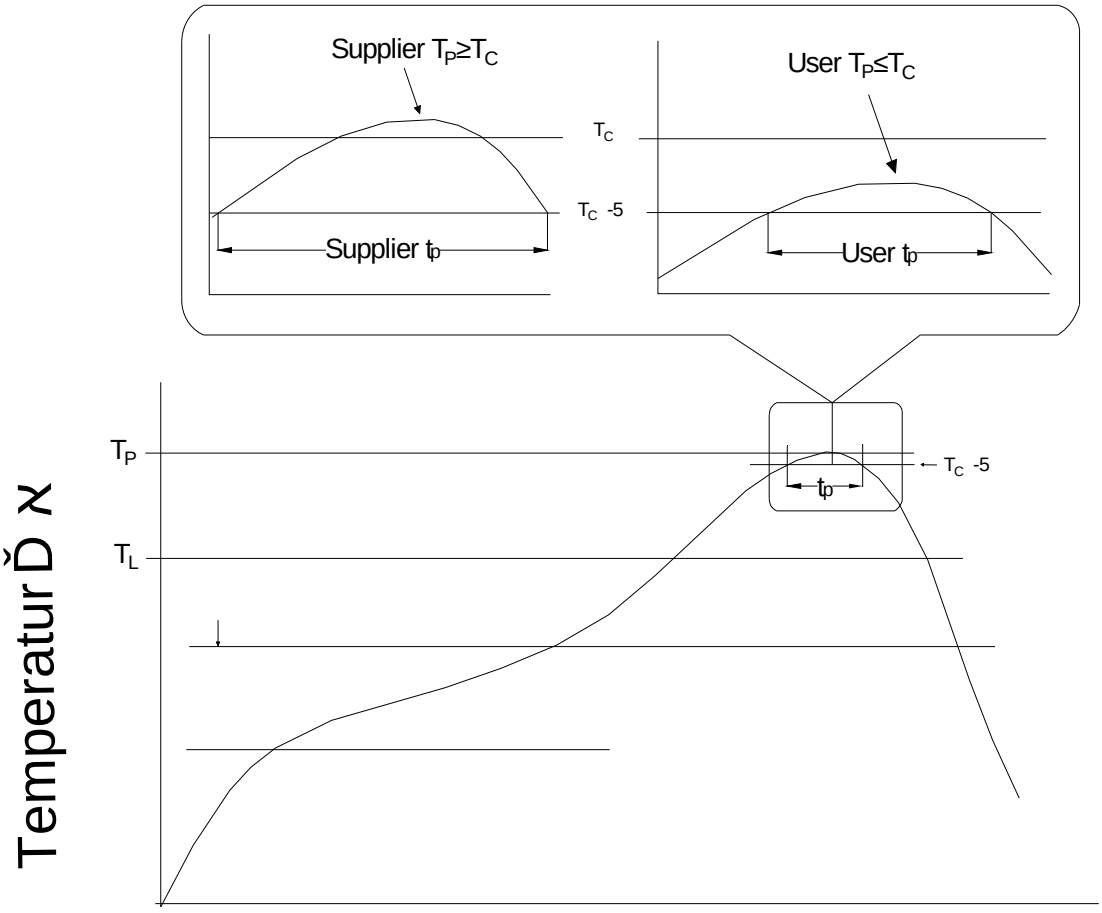
Supplier $T_P \geq T_C$
User $T_P \leq T_C$
T_C
T_C -5
Supplier t_p
User t_p
Temperatur Ď ϰ
T_P
T_L
T_C -5
t_p

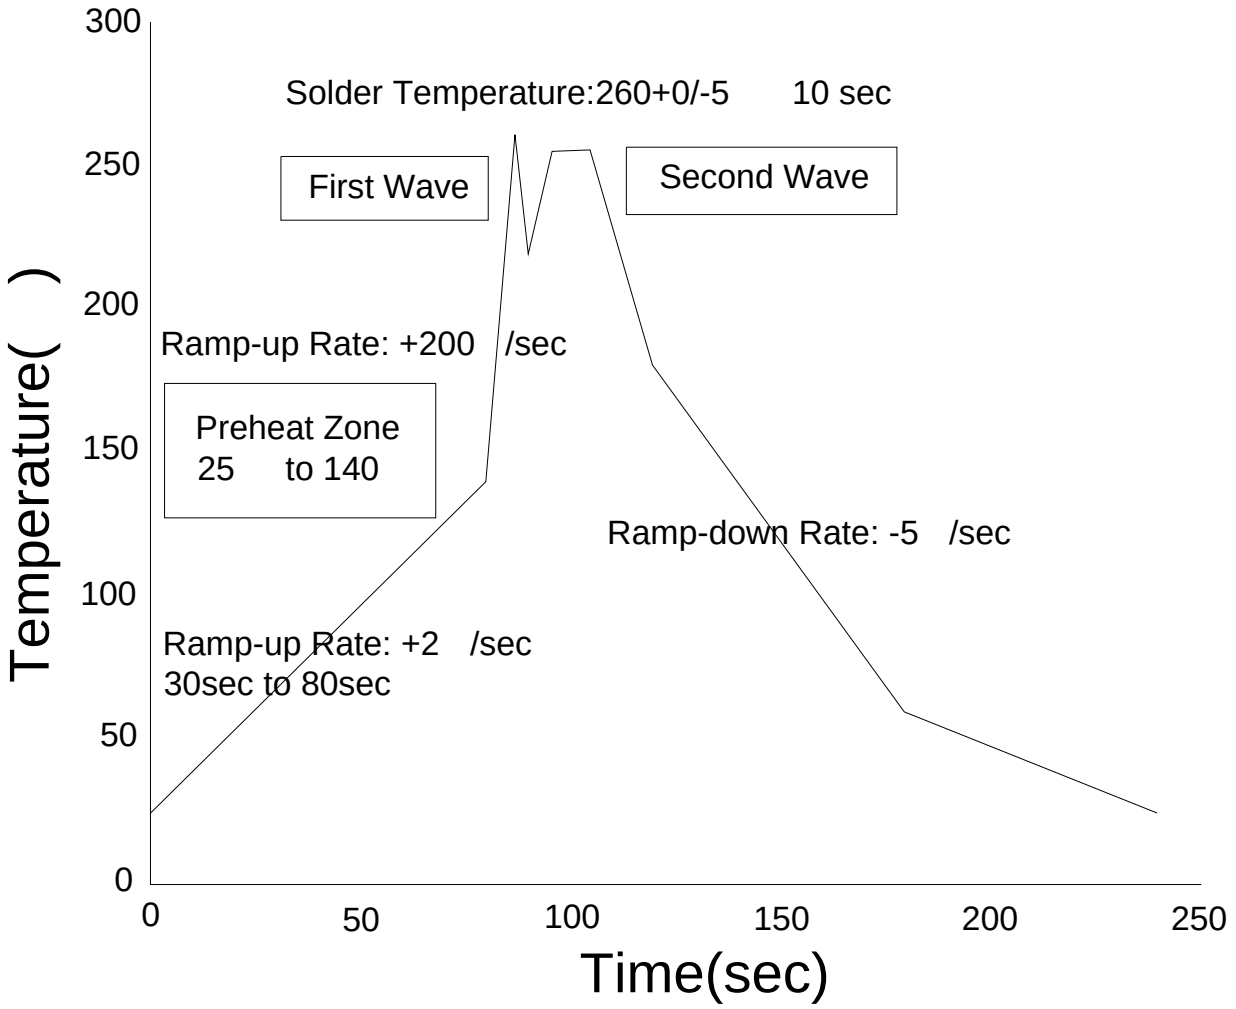

Soldering Temperature	360 ± 5
Soldering Time	3s max.

Note:

1. Reflow soldering is recommended at the temperatures and times shown, no more than three times.

2. Avoid direct contact between the epoxy body and any tools or surfaces exceeding its maximum storage temperature.

3. Application of pressure on the epoxy body is prohibited at elevated temperatures. In specific scenarios, any applied force must not exceed 2.5N.

4. Ensure the component has cooled to ambient temperature before proceeding with any subsequent manufacturing steps.

5. The component has a shelf life of one year when stored under standard conditions.

6. Recommend storage Temp.: 0~40°C;

Recommend storage humidity: <60%;

MSL level: MSL 1

Information furnished in this document is believed to be accurate and reliable. However, Jiangsu JieJie Microelectronics Co., Ltd. assumes no responsibility for the consequences of use without consideration for such information nor use beyond it. Information mentioned in this document is subject to change without notice, apart from that when an agreement is signed, Jiangsu JieJie complies with the agreement.

Products and information provided in this document have no infringement of patents. Jiangsu JieJie assumes no responsibility for any infringement of other rights of third parties which may result from the use of such products and information. This document supersedes and replaces all information previously supplied.

is a registered trademark of Jiangsu JieJie Microelectronics Co., Ltd.

Copyright © 2026 Jiangsu JieJie Microelectronics Co., Ltd. All rights reserved.