

JOCHA21X-M5 Series

Rev.A.1.0

The products are 1MBd high-speed opto-couplers. The device is a small-outline coupler suitable for surface-mount assembly. It consists of a high-output-power infrared LED optically coupled to a high-speed photodiode-transistor chip. It is housed in the SOP5 package and guarantees a creepage distance of ≥5 mm, a clearance of ≥5 mm and an insulation thickness of ≥0.4 mm. Therefore, it meets the reinforced insulation class requirements of international safety standards. The products are widely used in programmable controllers, industrial inverters and switching power supplies.





High isolation 3750 VRMS
High speed – 1MBd typical
Operating temperature range -40°C to 110°C
REACH & RoHS compliance
HBM: H3A; MM: M4; CDM: C3
CQC approved
VDE approved
UL approved


LED	Output
ON	L
OFF	H

(Temperature=25°C)

Parameter		Symbol	Value	Unit
Input	Forward Current	I_F	50	mA
	Peak Forward Current	I_{FP}	1	A
	Reverse Voltage	V_R	6	V
	Input Power Dissipation	P_D	100	mW
Output	Supply Voltage	V_{CC}	35	V
	Output Voltage	V_O	20	V

Output Current	I_O

	Common Mode Transient Immunity at Logic High	CM_H	I_F=0mA, V_{CM}=400Vpp, R_L=4.1kΩ	15	20	-	kV/μs
	Common Mode Transient Immunity at Logic Low	CM_L	I_F=16mA, V_{CM}=400Vpp, R_L=4.1kΩ	-15	-20	-	kV/μs

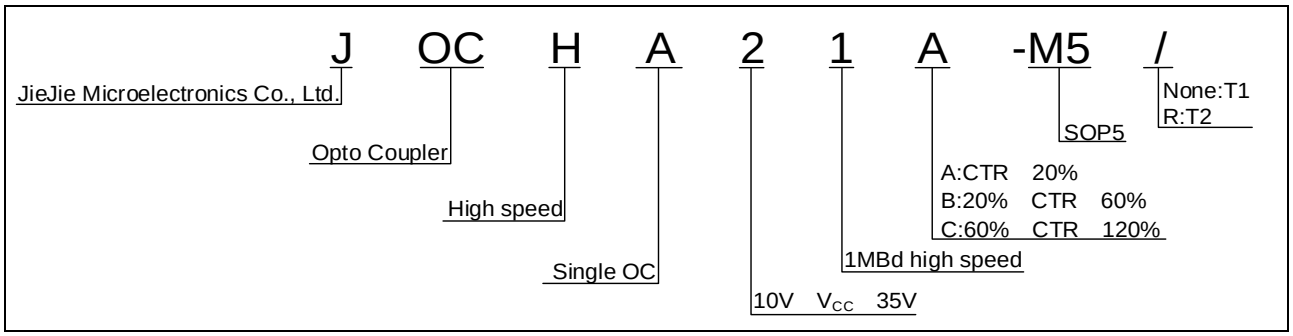

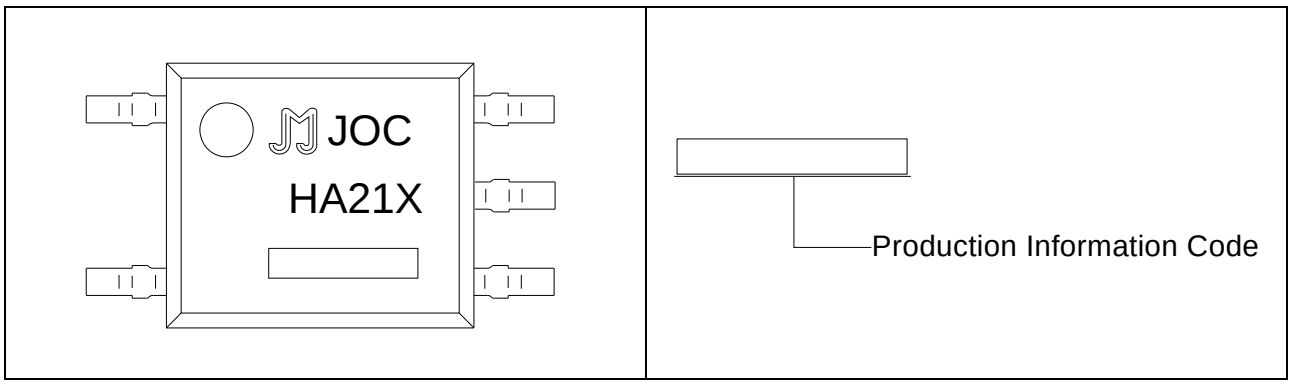


FIG.1: Forward Current vs. Forward Voltage

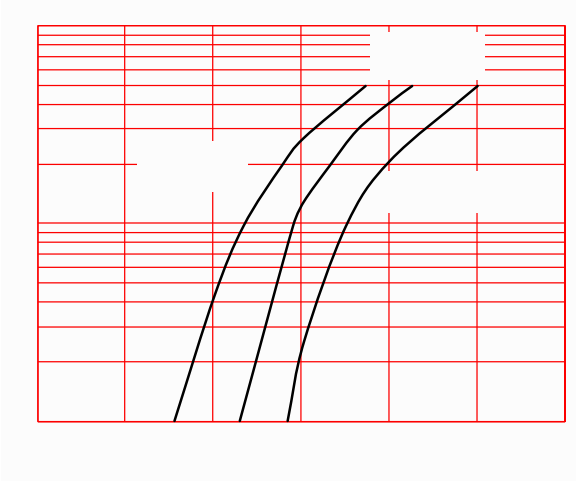


FIG.2: High Level Output Current vs. Ambient Temperature

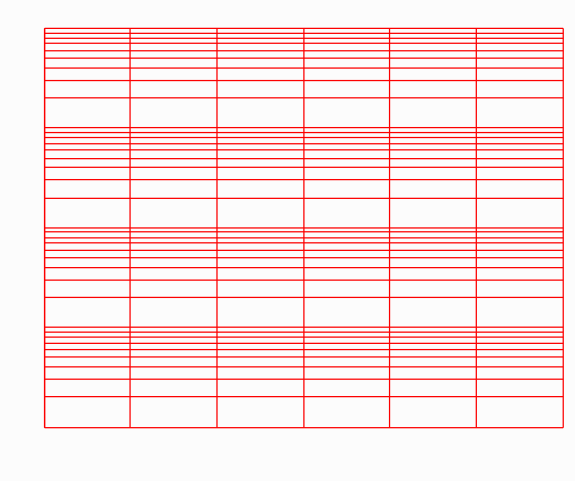


FIG.7: Low Level Output Voltage vs. Ambient Temperature

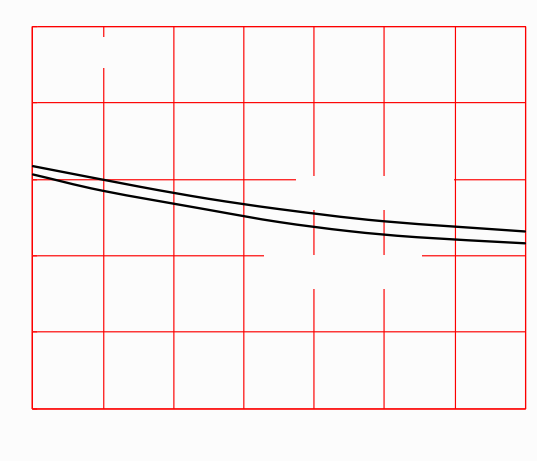


FIG.8: Propagation Delay vs. Load Resistance

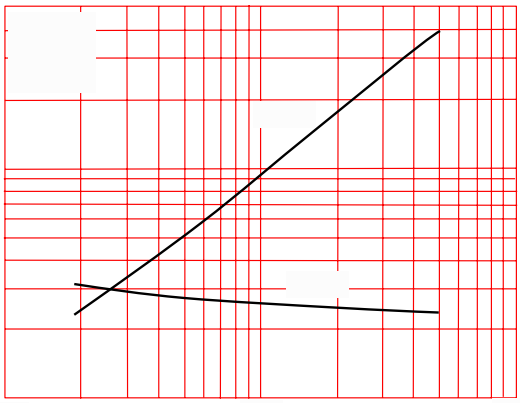


FIG.9: Propagation Delay vs. Ambient Temperature

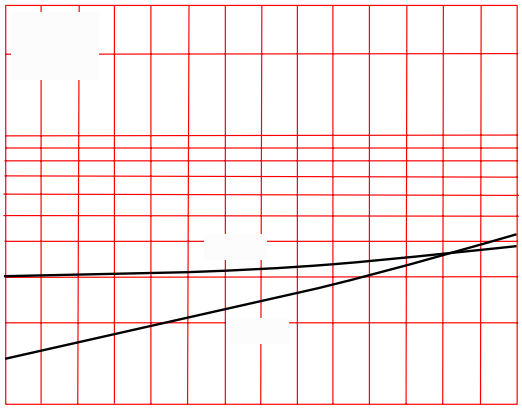


Fig.10: Switching Time Test Circuit and Waveform



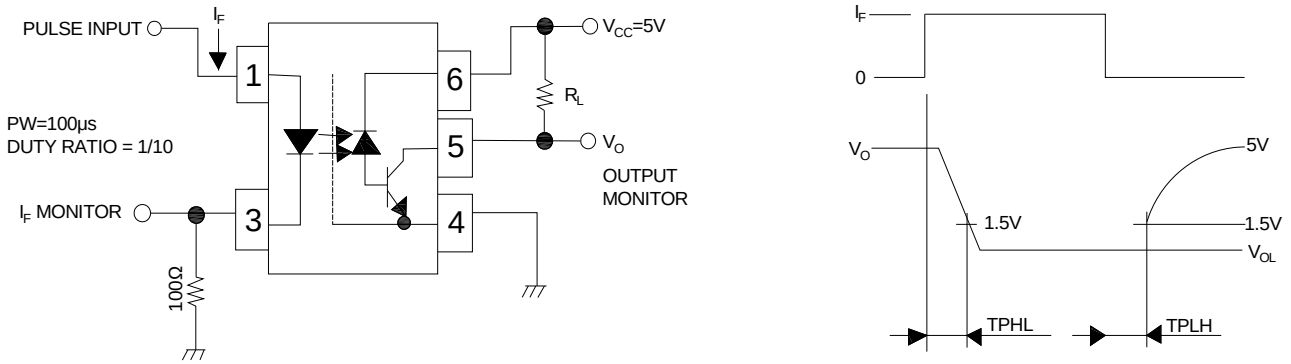



Fig.11: CMTI Test Circuit and Waveform

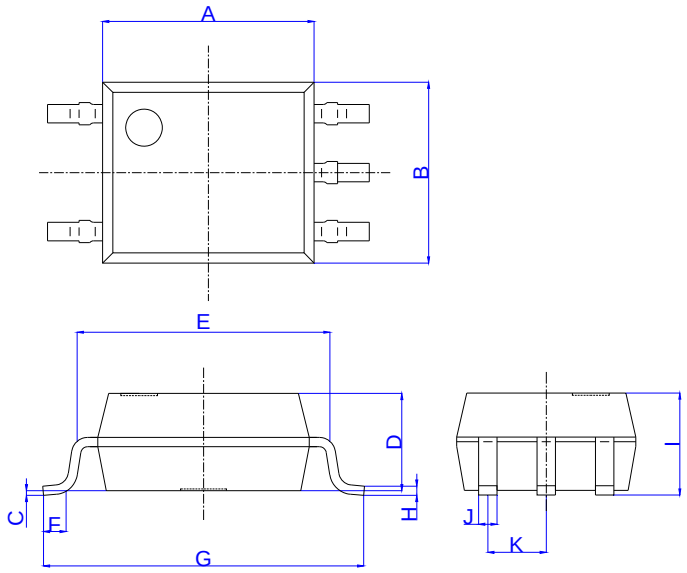

Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	4.40		4.80	0.173		0.189
B	3.60		4.20	0.142		0.165
C	0.00		0.20	0.000		0.008
D	1.90		2.30	0.075		0.091
E	5.00		5.60	0.197		0.220
F	0.34		0.94	0.013		0.037
G	6.70		7.30	0.264		0.287
H	0.10		0.30	0.004		0.012
I	2.00		2.40	0.079		0.094
J	0.25		0.55	0.010		0.022
K	1.02		1.52	0.040		0.060

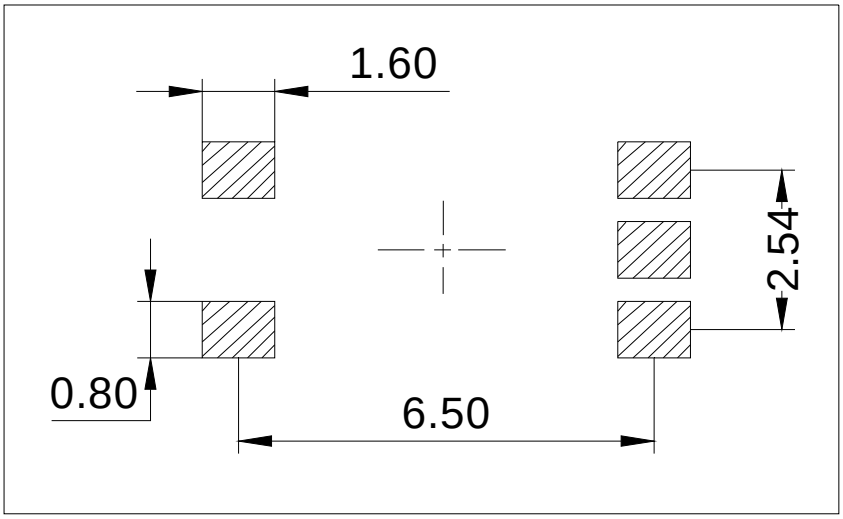


Option None

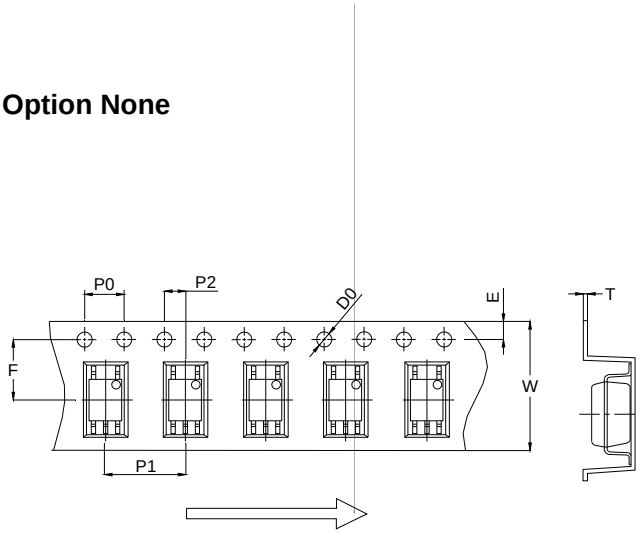


Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
D0		1.50	1.60		0.059	0.063
P0	3.90	4.00	4.10	0.154	0.157	0.161
P1	7.90	8.00	8.10	0.311	0.315	0.319
P2	1.90	2.00	2.10	0.075	0.079	0.083
E	1.65	1.75	1.85	0.065	0.069	0.073
F	4.40	4.50	4.60	0.173	0.177	0.181
T	0.25	0.30	0.35	0.010	0.012	0.014
W	11.90	12.00	12.30	0.469	0.472	0.484

Option R

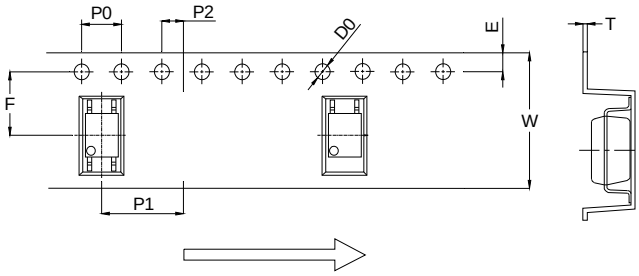

Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
D0						
P0						
P1						
P2						
E						
F						
T						
W						

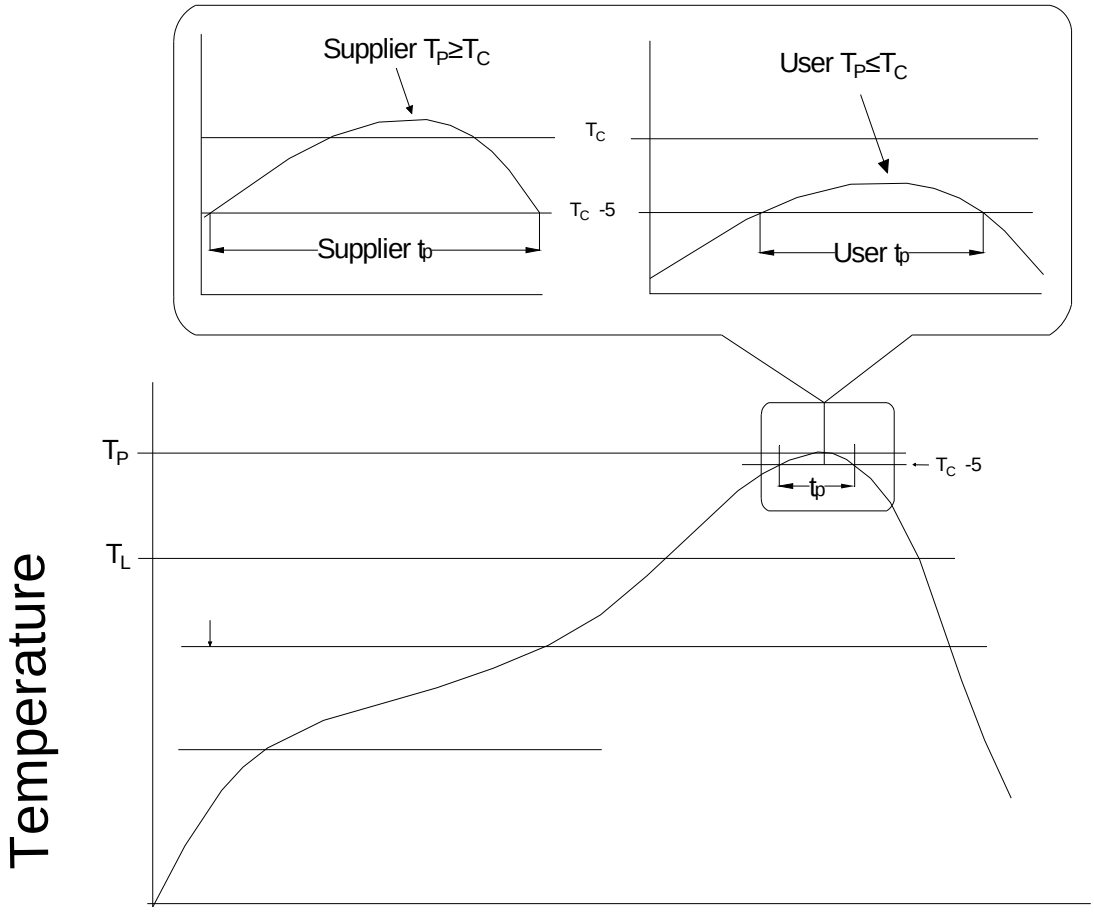
Supplier $T_P \geq T_C$
User $T_P \leq T_C$
T_C
T_C -5
Supplier t_p
User t_p
T_P
T_L
T_C -5
t_p
Temperature

JOCHA21X