




DESCRIPTION:

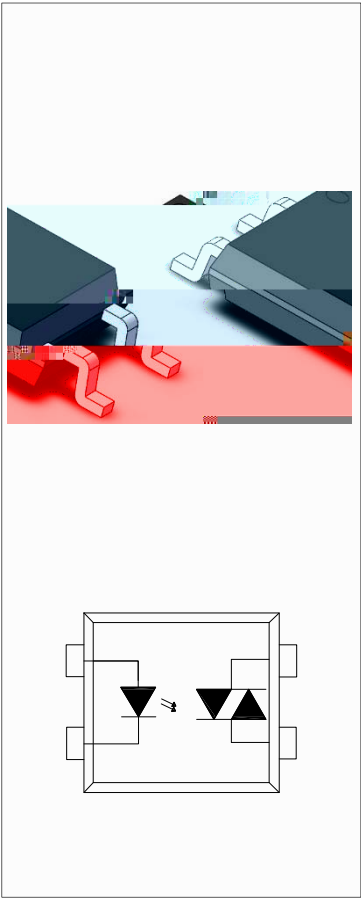

MAIN FEATURES

to 110

ABSOLUTE MAXIMUM RATINGS



NOTE1: 100 s pulse, 100Hz frequency

NOTE2: AC for 1minute, R.H.=40~60%


ELECTRICAL CHARACTERISTICS

NOTE3: Test voltage must be applied within dV/dt ratings.

NOTE4: Refer to Fig.14 & Fig.15




ORDERING INFORMATION

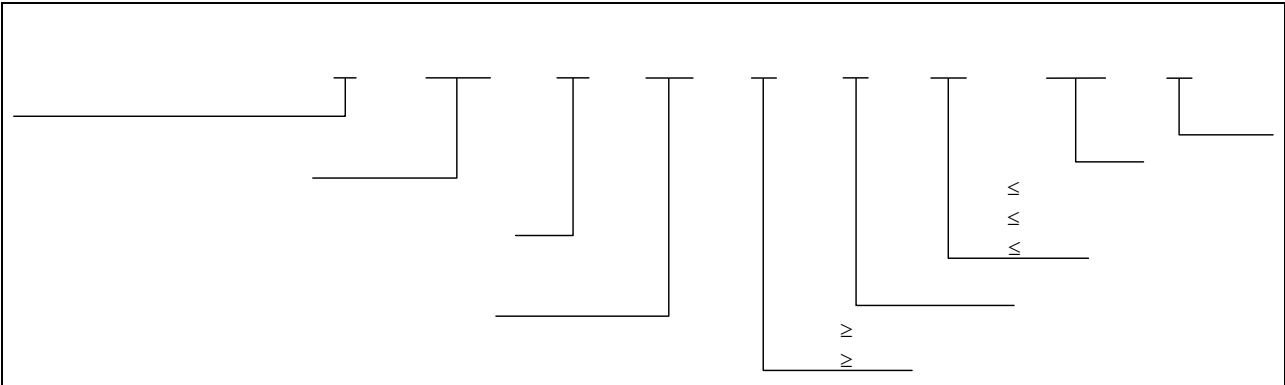

Packing Quantity			
Option	Quantity	Quantity – Inner box	Quantity –Outer box
SOP4	3000 Units/Reel	2 Reels/Inner box	5 Inner box/Outer box =30k Units


MARKING





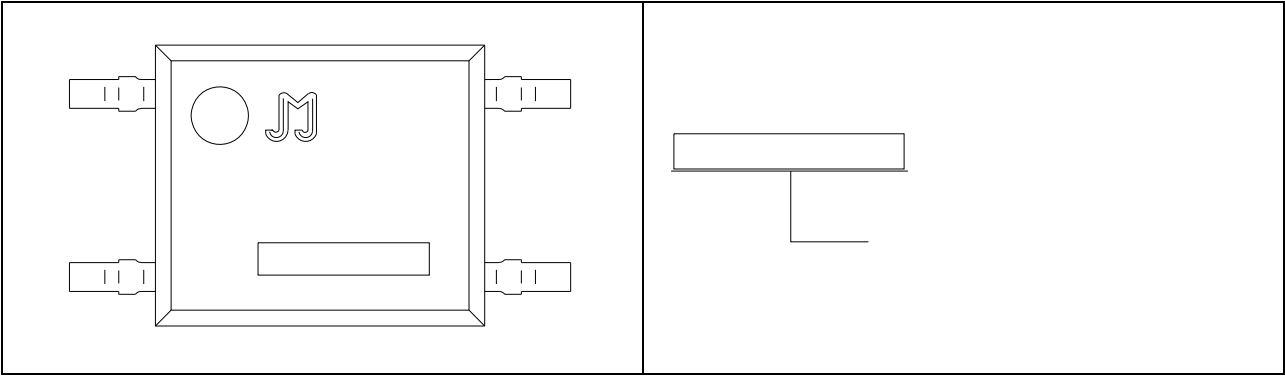








Characteristics Curves


50603040

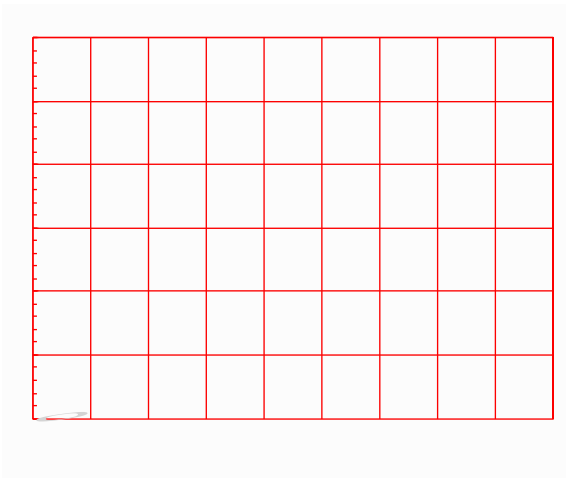


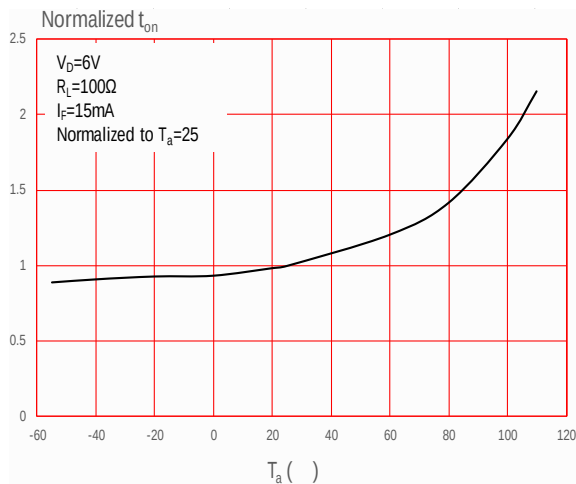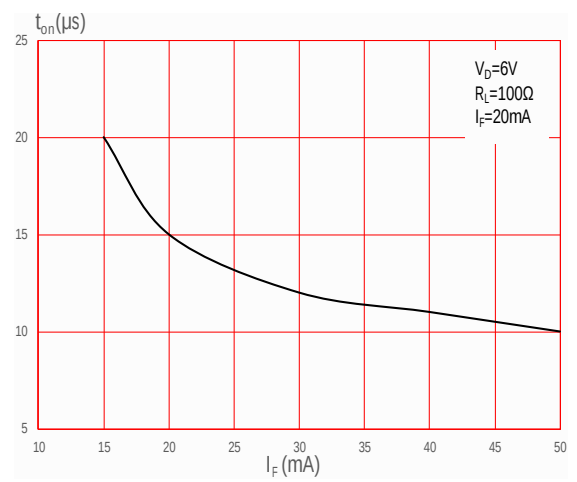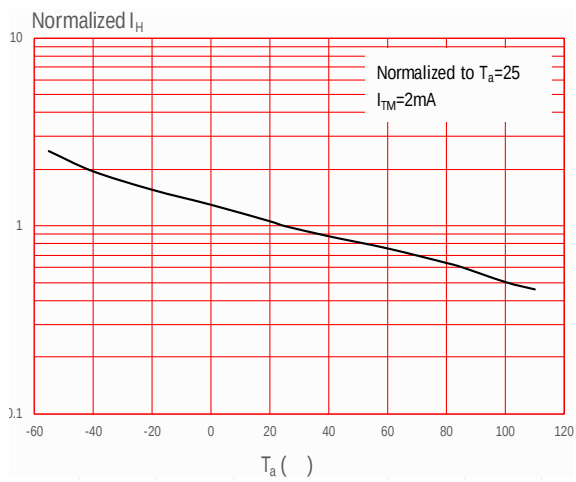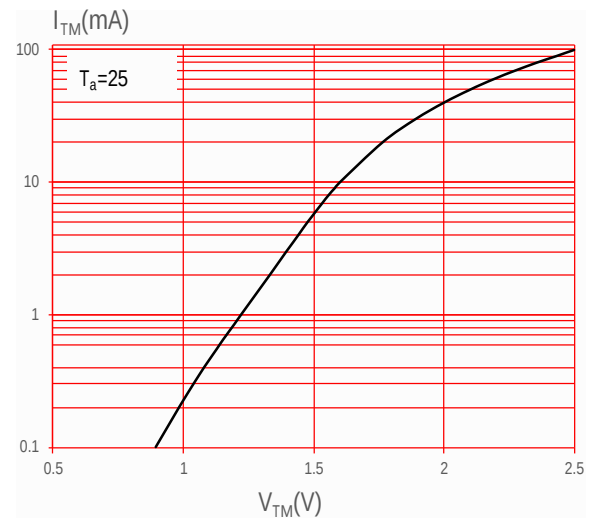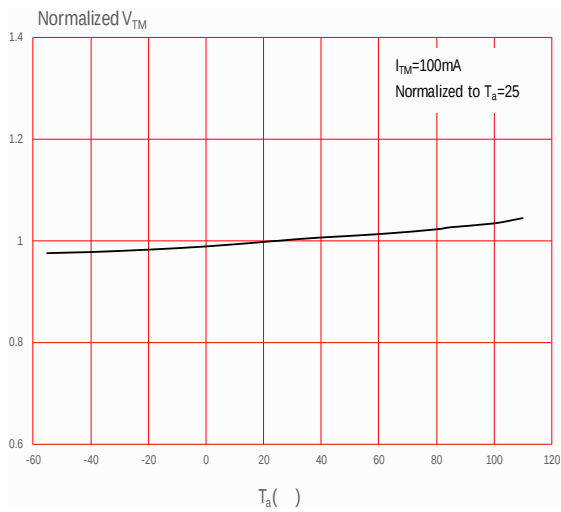


TEST CIRCUITS

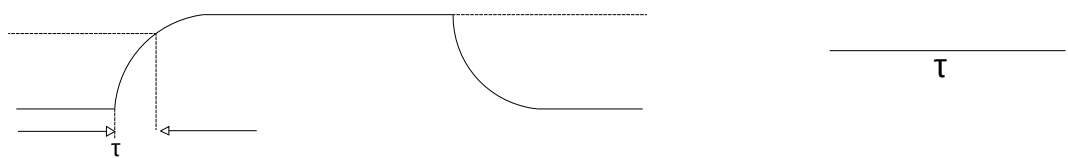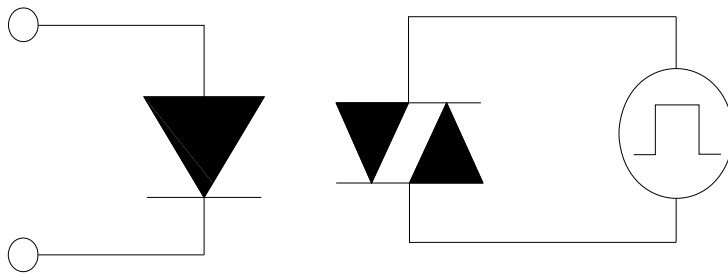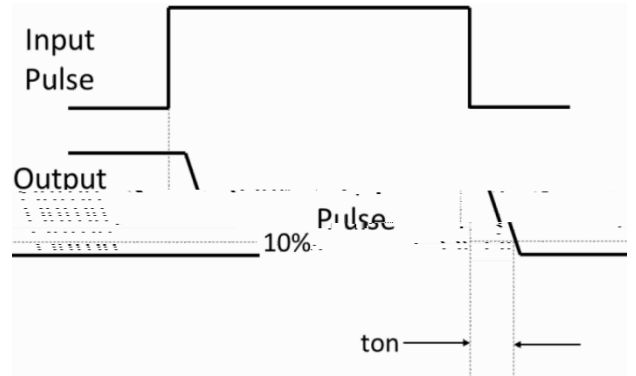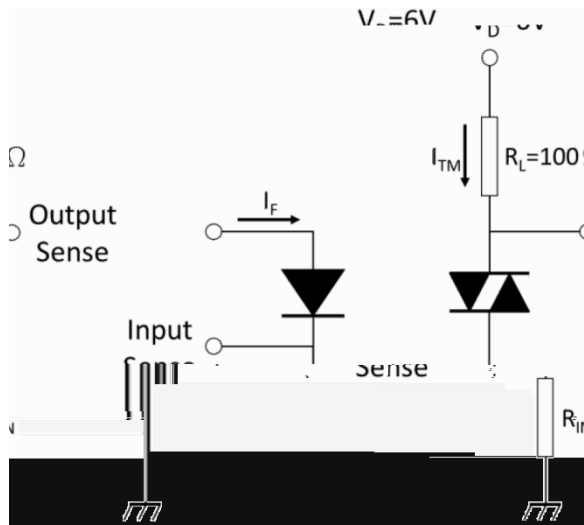

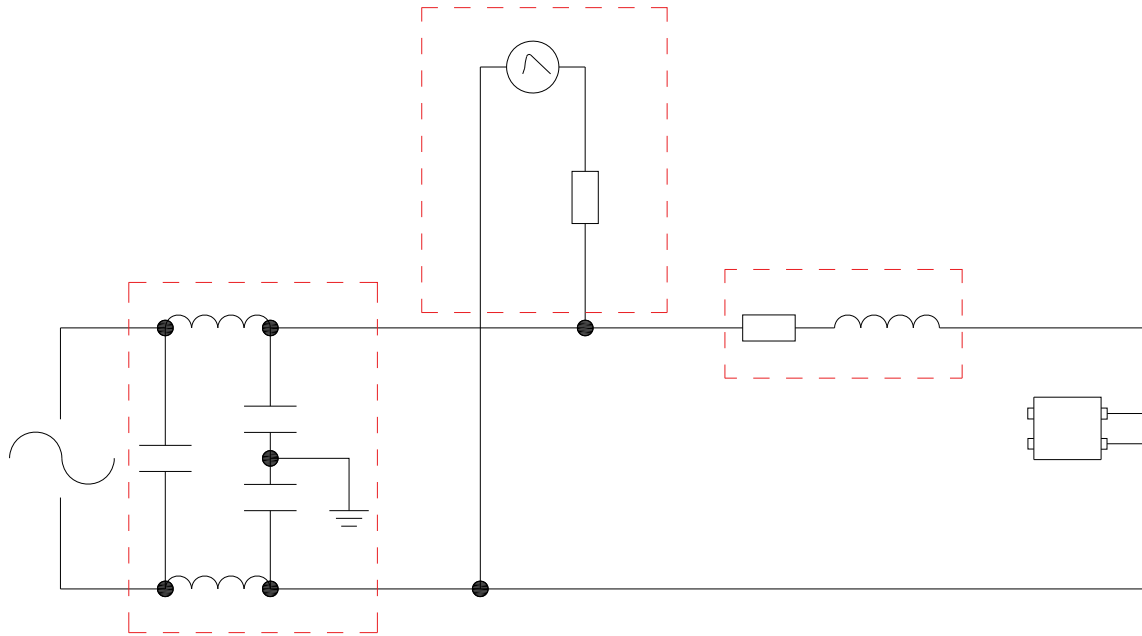

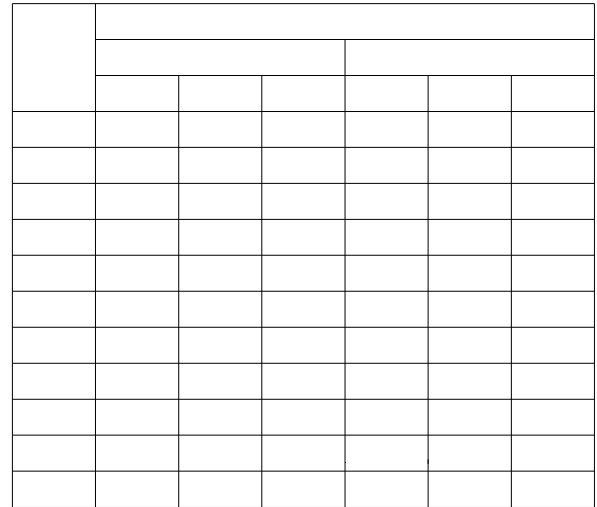


RECOMMENDED SOLDER MASK (Dimensions in mm unless otherwise stated)





CARRIER TAPE SPECIFICATIONS (Dimensions in mm unless otherwise stated)

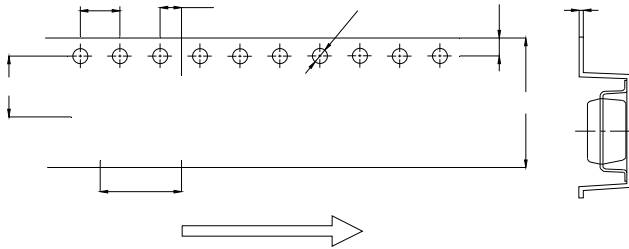



REFLOW INFORMATION

