
JJMICROELECTRONICS

650V 50A Trench and Field Stop IGBT


JJT50N65UK

- V_{CE} =650V
- I_C=50A@T_C=100
- $V_{CE(sat)}$=1.5V

TO-247i



- Trench and field-stop technology.
- Easy parallel switching capability.



- High efficiency for inverters.
- High ruggedness performance.
- RoHS compliant.

- PFC applications
- Welding machines

Type	Marking	Package	Packaging Method
JJT50N65UK	T5065UK	TO-247i	Tube

All product information is copyrighted and subject to legal disclaimers.

V_{CES}	Collector-emitter voltage	650	V
V_{GES}	Gate-emitter voltage	±20	V
I_C	Continuous collector current (T_C=25)	100	A
	Continuous collector current (T_C=100)	50	A
I_{CM}	Pulsed collector current, t_p limited by T_{vjmax}	200	A
I_F	Diode continuous forward current (T_C=100)	30	A
I_{FM}	Diode maximum current, t_p limited by T_{vjmax}	60	A
P_{tot}	Power dissipation (T_C=25)	230	W
	Power dissipation (T_C=100)	115	W
T_{vj}	Operating junction temperature range	-40 to +175	
T_{stg}	Storage temperature range	-55 to +150	

$R_{th(j-c)}$	Thermal resistance, junction to case for IGBT	-	0.65	K/ W
$R_{th(j-c)}$	Thermal resistance, junction to case for Diode	-	1.3	K/ W
$R_{th(j-a)}$	Thermal resistance, junction to ambient	-	40	K/ W

All product information is copyrighted and subject to legal disclaimers.

(T_{vj}=25 unless otherwise specified)

Static characteristics

BV_{CES}	Collector-emitter breakdown voltage	V_{GE}=0V, I_C=250μA	650	-	-	V
I_{CES}	Collector-emitter leakage current	V_{CE}=650V, V_{GE}=0V	-	-	50	μA
I_{GES}	Gate leakage current, forward	V_{GE}=20V, V_{CE}=0V	-	-	100	nA
	Gate leakage current, reverse	V_{GE}=-20V, V_{CE}=0V	-	-	-100	nA
$V_{GE(th)}$	Gate-emitter threshold voltage	V_{GE}=V_{CE}, I_C=1mA	4.0	4.4	4.8	V
$V_{CE(sat)}$	Collector-emitter saturation voltage	V_{GE}=15 V, I_C=50A	1.2	1.5	1.8	V
		V_{GE}=15V, I_C=50A, T_{vj}=175	-	1.95	-	V

Dynamic characteristics

C_{ies}	Input capacitance	V_{CE}=30V V_{GE}=0V f=1MHz	-	5096	-	pF
C_{oes}	Output capacitance		-	106	-	pF
C_{res}	Reverse transfer capacitance		-	30	-	pF
Q_g	Total gate charge	V_{CC}=520V V_{GE}=15V I_C=50A	-	180	-	nC

All product information is copyrighted and subject to legal disclaimers.

(T_{vj}=25 unless otherwise specified)

V_F	Diode forward voltage	I_F=50A	2.0	2.3	2.6	V
		I_F=50A,T_{vj}=175	-	1.9	-	V
t_{rr}	Diode reverse recovery time	V_R=400V I_F=50A di_F/dt=-400A/μs	-	100	-	ns
I_{rrm}	Diode peak reverse recovery current		-	7.5	-	A
Q_{rr}	Diode reverse recovery charge		-	240	-	nC
t_{rr}	Diode reverse recovery time	V_R=400V I_F=50A di_F/dt=-400A/μs T_{vj}=175	-	177	-	ns
I_{rrm}	Diode peak reverse recovery current		-	17	-	A
Q_{rr}	Diode reverse recovery charge		-	1450	-	nC

All product information is copyrighted and subject to legal disclaimers.

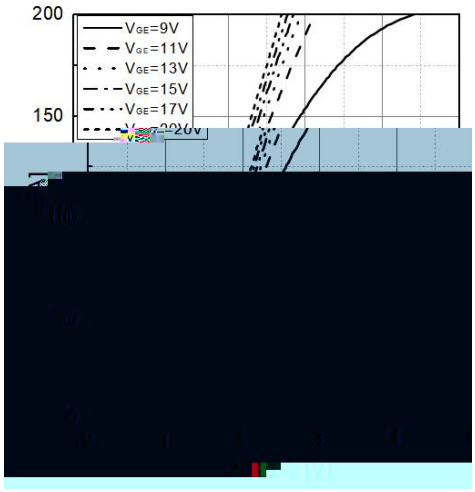


Fig 1. Typical output characteristic (T_{vj}=25)

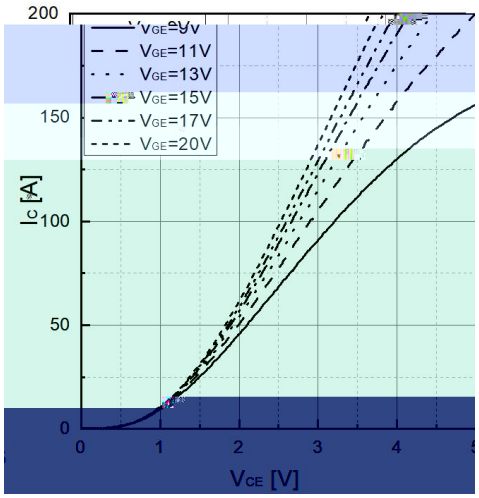


Fig 2. Typical output characteristic(T_{vj}=175)

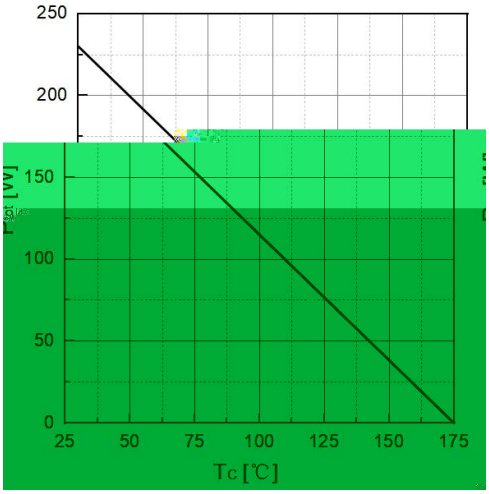


Fig 3. Power dissipation as a function of T_C

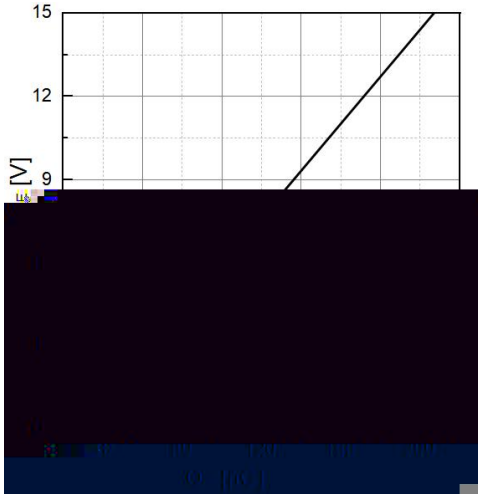


Fig 4. Typical Gate charge

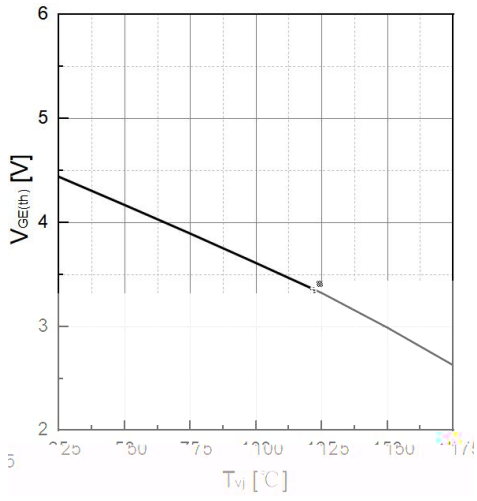


Fig 5. Typical $V_{GE(th)}$ as a function of T_{vj} (I_C=1mA)

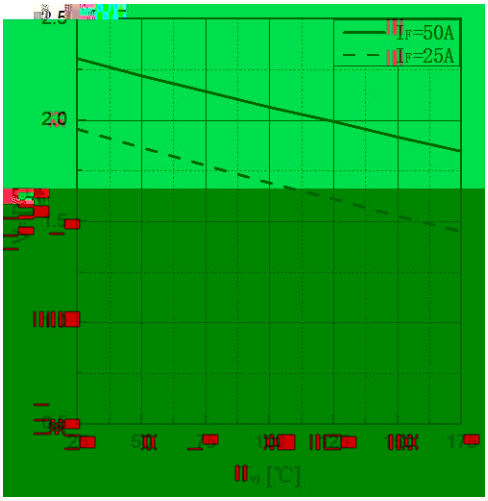


Fig 6. Typical V_F as a function of T_{vj}

All product information is copyrighted and subject to legal disclaimers.

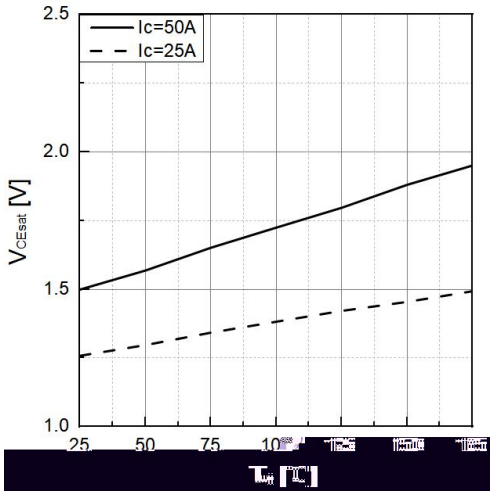


Fig 7. Typical V_{CEsat} as a function of T_{vj}

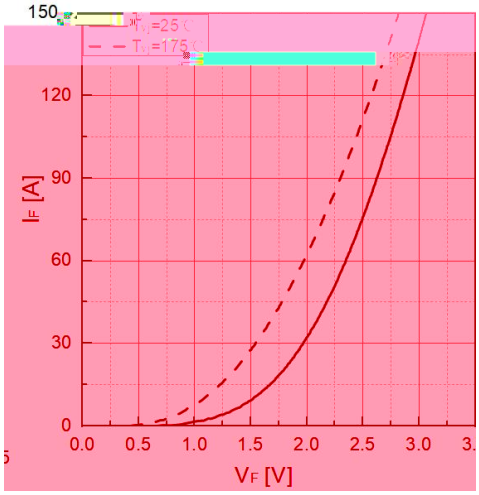


Fig 8. Typical I_F as a function of V_F

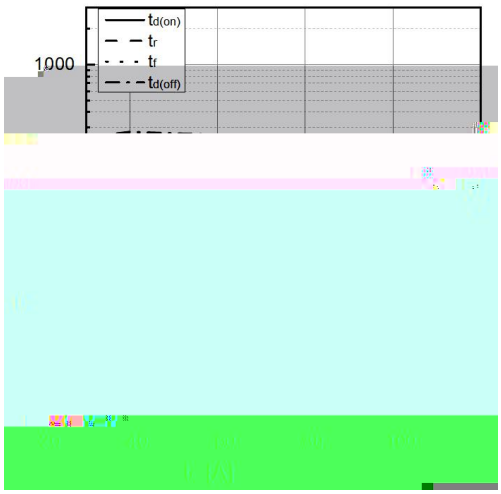


Fig 9. Typical switching time as a function of I_C

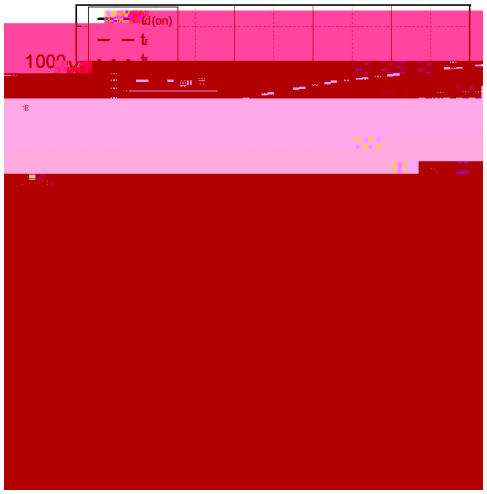


Fig 10. Typical switching times as a function of R_G

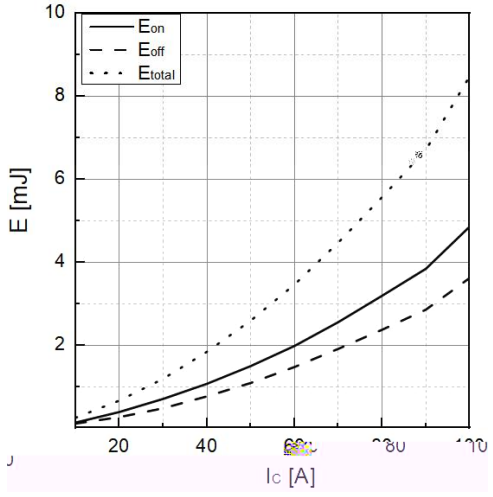


Fig 11. Typical switching energy losses as a function of I_C

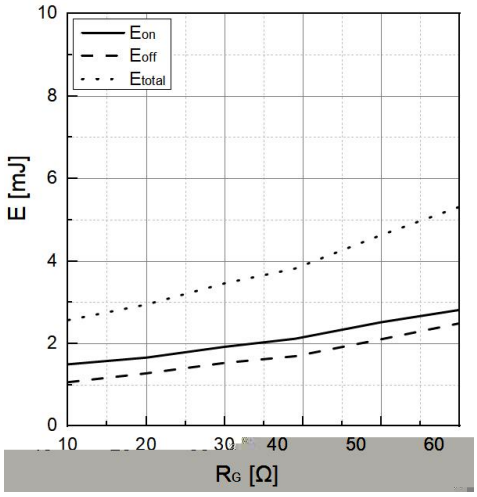


Fig 12. Typical switching energy losses as a function of R_G

All product information is copyrighted and subject to legal disclaimers.

Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	15.95	16.00	16.05	0.627	0.629	0.631
B	21.85	21.90	21.92	0.860	0.862	0.864
B1	5.15	5.20	5.25	0.202	0.204	0.206
B2	4.32	4.37	4.42	0.170	0.172	0.174
C	19.01	19.11	19.21	0.748	0.752	0.756
D	2.07	2.10	2.13	0.081	0.082	0.083
E	3.07	3.10	3.13	0.120	0.122	0.123
F	1.15	1.20	1.25	0.045	0.047	0.049
G	5.45REF				0.214REF	
G1	5.85	5.90	5.95	0.230	0.232	0.234
G2	-	0.60	-	-	0.023	-
G3	1.76	1.81	1.86	0.069	0.071	0.073
H	4.95	5.00	5.05	0.194	0.196	0.198
J	1.44	1.49	1.54	0.056	0.058	0.060
K	2.30	2.35	2.40	0.090	0.092	0.094
L	0.59	0.60	0.61	0.023	0.023	0.024
L1	1.85	1.90	1.95	0.072	0.074	0.076

All product information is copyrighted and subject to legal disclaimers.

Date	Revision	Changes
2025-05-17	Rev A.1.2	Update
2026-02-05	Rev 1.3	Update
2026-04-17	Rev 1.4	Update Thermal

PLEASE NOTE - Jiangsu JieJie Microelectronics Co., Ltd ("JJM") reserves the right to amend, correct, modify and enhance the product and/or this document at any time without prior notice. If you intend to purchase this product, please obtain the latest information available before placing your order. The sale of JJM products is governed by JJM's prevailing terms and conditions at the time of purchase and purchasers are solely responsible for the selection and use of the products with no liability on JJM's part to supply application assistance or customization. Purchase of JJM products does not grant the purchaser license, express or implied, to JJM's intellectual property. Any warranties provided with JJM products are null and void upon resale unless accompanied by the information set forth herein in its entirety. The JJM name and logo are registered trademarks of Jiangsu JieJie Microelectronics Co., Ltd. This document supersedes all previous versions. ©2024 JJM - All rights reserved