JJMICROELECTRONICS

650V 60A Trench and Field Stop IGBT

JJT60N65HE

Key performance:

- V_{CE} =650V
- I_C=60A@T_C=100
- $V_{CE(sat)}$=1.9V

TO-247



Features:

- Trench and field-stop technology.
- Easy parallel switching capability.



Benefits:

- High efficiency for inverters.
- High ruggedness performance.
- RoHS compliant.

Applications:

- PFC applications
- Uninterruptible power supplies
- Solar inverters

Package parameters

Type	Marking	Package	Packaging Method
JJT60N65HE	T6065HE	TO-247	Tube

All product information is copyrighted and subject to legal disclaimers.

Symbol	Parameter	Values	Unit
V_{CES}	Collector-emitter voltage	650	V
V_{GES}	Gate-emitter voltage	±20	V
I_C	Continuous collector current (T_C=25)	120	A
	Continuous collector current (T_C=100)	60	A
I_{CM}	Pulsed collector current, t_p limited by T_{vjmax}	240	A
I_F	Diode continuous forward current (T_C=100)	60	A
I_{FM}	Diode maximum current, t_p limited by T_{vjmax}	240	A
P_{tot}	Power dissipation (T_C=25)	333	W
	Power dissipation (T_C=100)	167	W
T_{vj}	Operating junction temperature ra		

All product information is copyrighted and s ect legal disclaimers.

Symbol	Parameter	Test condition	Values			Unit
			Min.	Typ.	Max.	
BV_{CES}	Collector-emitter breakdown voltage	V_{GE}=0V, I_C=250μA	650	-	-	V
I_{CES}	Collector-emitter leakage current	V_{CE}=650V, V_{GE}=				

All product information is copyrighted and subject to legal disclaimers.

Switching characteristics

Symbol	Parameter	Test condition	Values			Unit
			Min.	Typ.	Max.	
$t_{d(on)}$	Turn-on delay time	V_{CC}=400V V_{GE}=0/15V I_C=60A R_G=10Ω Inductive load	-	44	-	ns
t_r	Rise time		-	100	-	ns
$t_{d(off)}$	Turn-off delay time		-	166	-	ns
t_f	Fall time		-	75	-	ns
E_{on}	Turn-on energy		-	2.3	-	mJ
E_{off}	Turn-off energy		-	1.3	-	mJ
E_{ts}	Total switching energy		-	3.6	-	mJ
$t_{d(on)}$	Turn-on delay time	V_{CC}=400V V_{GE}=0/15V I_C=60A R_G=10Ω Inductive load T_{vj} =175	-	45	-	ns
t_r	Rise time		-	105	-	ns
$t_{d(off)}$	Turn-off delay time		-	180	-	ns
t_f	Fall time		-	76	-	ns
E_{on}	Turn-on energy		-	3.6	-	mJ
E_{off}	Turn-off energy		-	1.6	-	mJ
E_{ts}	Total switching energy		-	5.2	-	mJ

All product information is copyrighted and subject to legal disclaimers.

Electrical characteristics of Diode (T_{vj}=25 unless otherwise specified)

Symbol	Parameter	Test condition	Values			Unit
			Min.	Typ.	Max.	
V_F	Diode forward voltage	I_F=60A	-	1.7	-	V
		I_F=60A,T_{vj}=175	-	1.4	-	V
t_{rr}	Diode reverse recovery time	V_R=400V I_F=60A di_F/dt=-450A/μs	-	78	-	ns
I_{rrm}	Diode peak reverse recovery current		-	14	-	A
Q_{rr}	Diode reverse recovery charge		-	600	-	nC
t_{rr}	Diode reverse recovery time	V_R=400V I_F=60A di_F/dt=-450A/μs T_{vj}=175	-	155	-	ns
I_{rrm}	Diode peak reverse recovery current		-	25	-	A
Q_{rr}	Diode reverse recovery charge		-	2300	-	nC

All product information is copyrighted and subject to legal disclaimers.

Typical performance characteristics

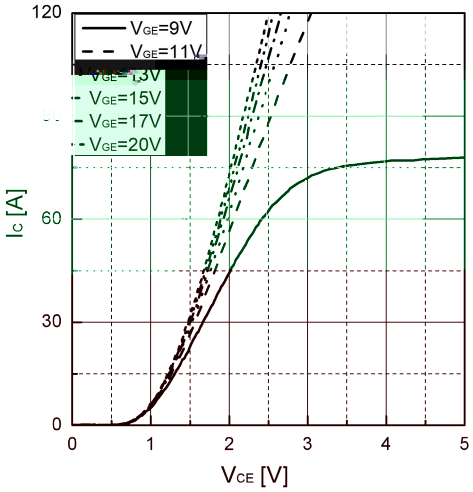

Fig 1. Typical output characteristic (T_{vj}=25)

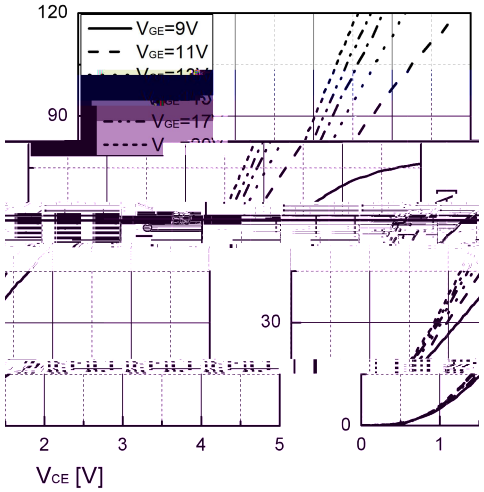

Fig 2. Typical output characteristic(T_{vj}=175)

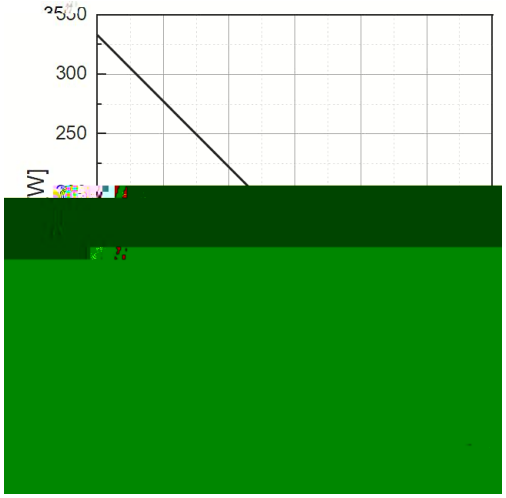

Fig 3. Power dissipation as a function of T_C

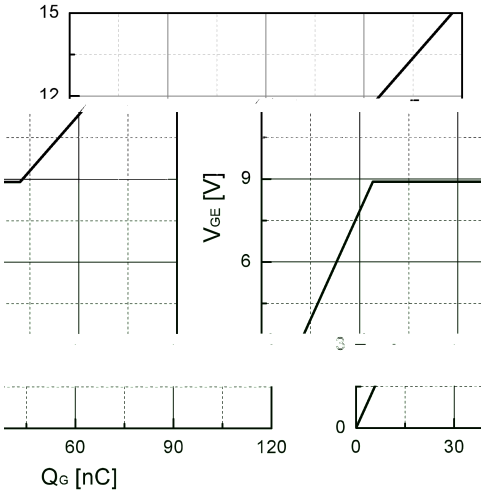

Fig 4. Typical Gate charge

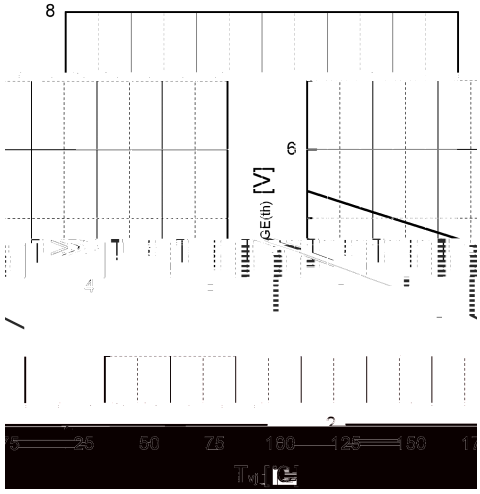

Fig 5. Typical $V_{GE(th)}$ as a function of T_{vj} (I_C=1mA)

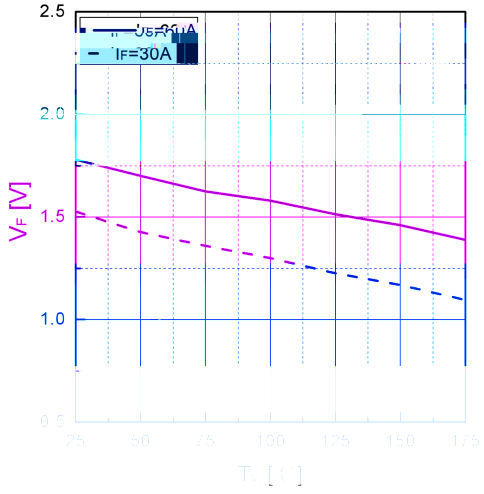

Fig 6. Typical V_F as a function of T_{vj}

All product information is copyrighted and subject to legal disclaimers.

Typical performance characteristics

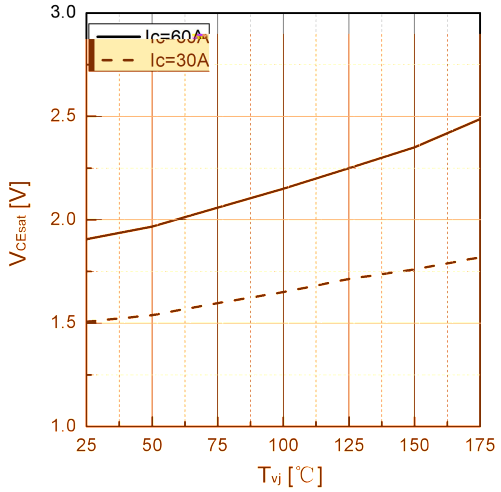

Fig 7. Typical V_{CEsat} as a function of T_{vj}

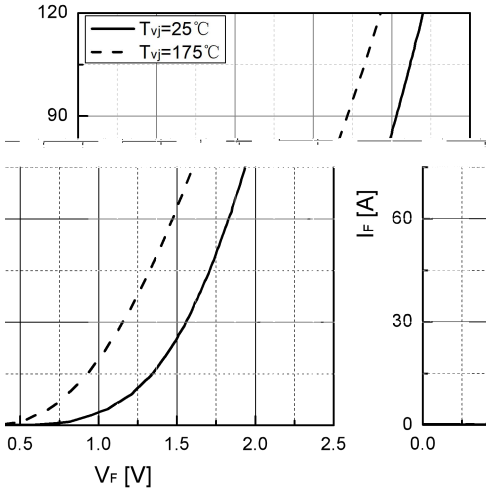

Fig 8. Typical I_F as a function of V_F

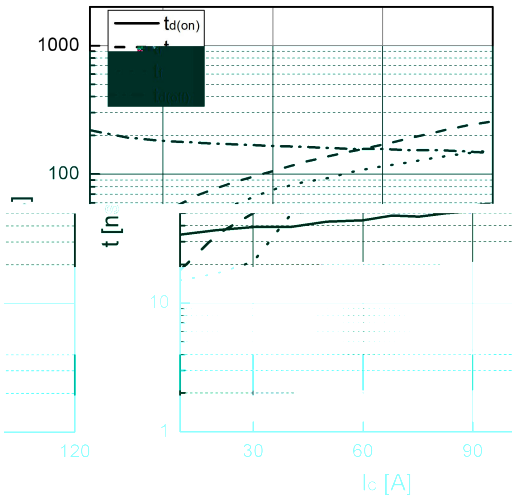

Fig 9. Typical switching time as a function of I_C

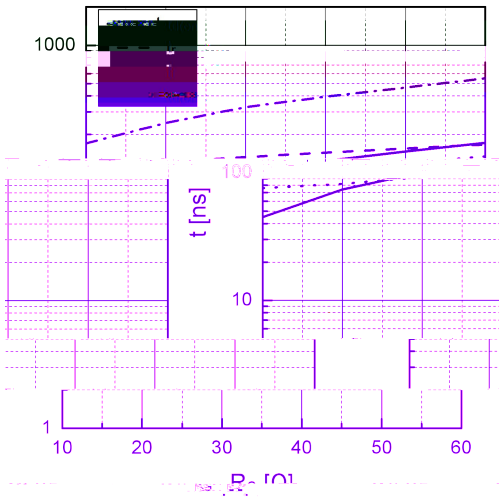

Fig 10. Typical switching times as a function of R_G

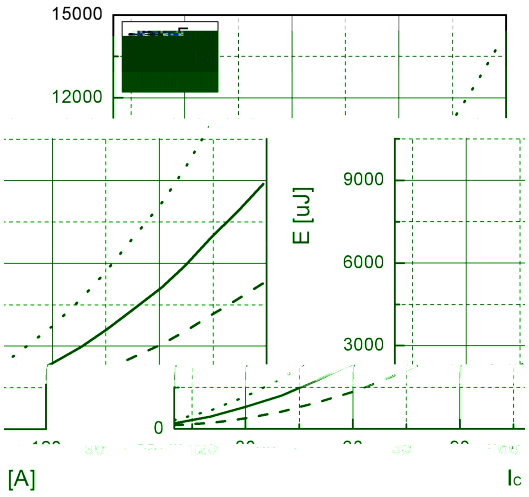

Fig 11. Typical switching energy losses as a function of I_C

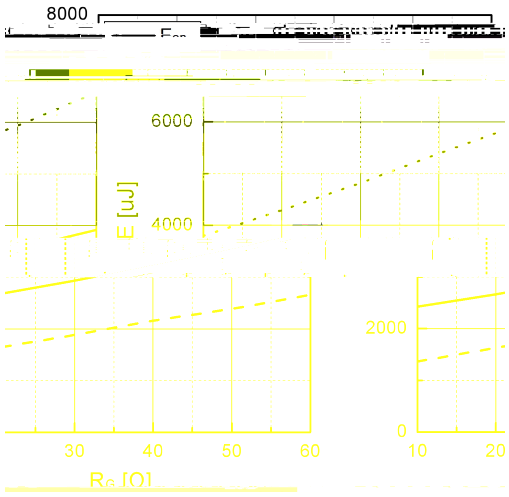

Fig 12. Typical switching energy losses as a function of R_G

All product information is copyrighted and subject to legal disclaimers.

Typical performance characteristics

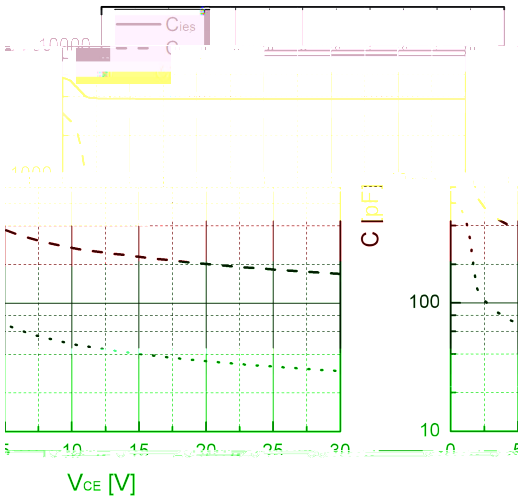

Fig 13. Typical capacitance as a function of V_{CE} (f=1Mhz, V_{GE}=0V)

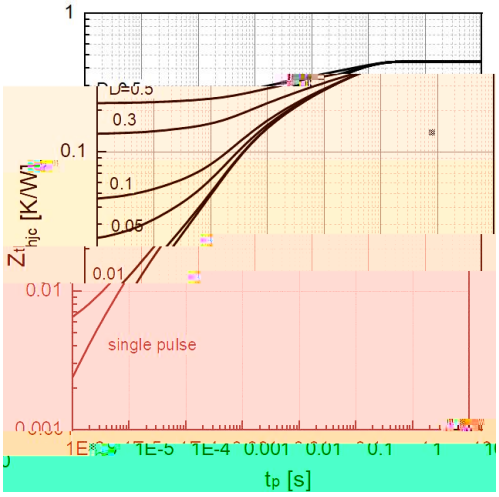

Fig 14. Transient thermal impedance of IGBT

All product information is copyrighted and subject to legal disclaimers.

Package dimension

TO-247

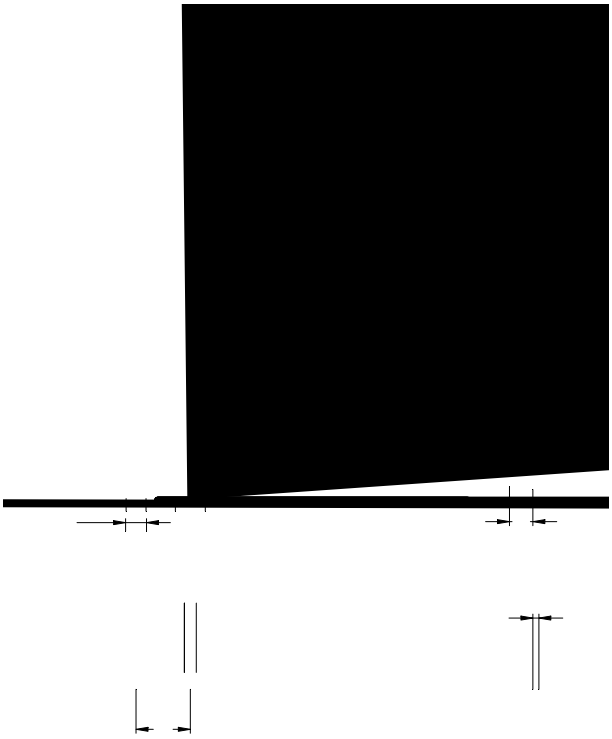

Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	15.50	15.80	16.10	0.610	0.622	0.634
B	20.80	21.00	21.20	0.819	0.827	0.835
C	19.70	20.00	20.30	0.776	0.787	0.799
D	1.80	2.00	2.20	0.071	0.079	0.087
E	1.90	2.10	2.30	0.075	0.083	0.091
F	1.00	1.20	1.40	0.039	0.047	0.055
G	5.25	-	5.65	0.207	-	0.222
H	4.80	5.00	5.20	0.189	0.197	0.205
J	1.90	2.00	2.10	0.075	0.079	0.083
K	2.20	2.35	2.50	0.087	0.093	0.098
L	0.41	0.60	0.79	0.016	0.024	0.031
M	2.80	3.00	3.20	0.110	0.118	0.126
N	2.90	3.10	3.30	0.114	0.122	0.130

All product information is copyrighted and subject to legal disclaimers.

Revision history

Date	Revision	Changes
2023-12-12	Rev 1.0	Release of the datasheet
2024-03-20	Rev 1.1	Update
2024-05-17	Rev 1.2	Update
2026-06-25	Rev 1.3	Update thermal

Disclaimer

PLEASE NOTE - Jiangsu JieJie Microelectronics Co., Ltd ("JJM") reserves the right to amend, correct, modify and enhance the product and/or this document at any time without prior notice. If you intend to purchase this product, please obtain the latest information available before placing your order. The sale of JJM products is governed by JJM's prevailing terms and conditions at the time of purchase and purchasers are solely responsible for the selection and use of the products with no liability on JJM's part to supply application assistance or customization. Purchase of JJM products does not grant the purchaser license, express or implied, to JJM's intellectual property. Any warranties provided with JJM products are null and void upon resale unless accompanied by the information set forth herein in its entirety. The JJM name and logo are registered trademarks of Jiangsu JieJie Microelectronics Co., Ltd. This document supersedes all previous versions. ©2026 JJM - All rights reserved