JJMICROELECTRONICS


1200V 75A Trench and Field Stop IGBT

JJT75N120HA

:


TO-247PLUS

- V_{CE} =1200V
- I_C=75A@T_C=100
- $V_{CE(sat)}$=2.0V



:

- Trench and field-stop technology
- Easy parallel switching capability
- Low V_{CEsat}
- High ruggedness performance
- RoHS compliant



A :

- Solar converters
- On-Board Charger

Type	Marking	Package	Packaging Method
JJT75N120HA	T75120HA	TO-247PLUS	Tube

All product information is copyrighted and subject to legal disclaimers.

V_{CES}	Collector-emitter voltage	1200	V
V_{GES}	Gate-emitter voltage	±20	V
I_C	Continuous collector current (T_C=25)	150	A
	Continuous collector current (T_C=100)	75	A
I_{CM}	Pulsed collector current, t_p limited by T_{vjmax}	300	A
I_F	Diode continuous forward current (T_C=100)	75	A
I_{FM}	Diode maximum current, t_p limited by T_{vjmax}	150	A
P_{tot}	Power dissipation (T_C=25)	938	W
	Power dissipation (T_C=100)	469	W
T_{vj}	Operating junction temperature range	-40 to +175	
T_{stg}	Storage temperature rana		

All product information is copyrighted and subject to legal disclaimers.

B (T_{vj}=25 unless otherwise specified)

Static characteristics

			.	.	.	
BV_{CES}	Collector-emitter breakdown voltage	V_{GE}=0V, I_C=250μA	1200	-	-	V
I_{CES}	Collector-emitter leakage current	V_{CE}=1200V, V_{GE}=0V	-	-	100	μA
I_{GES}	Gate leakage current, forward	V_{GE}=20V, V_{CE}=0V	-	-	100	nA
	Gate leakage current, reverse	V_{GE}=-20V, V_{CE}=0V	-	-	-100	nA
$V_{GE(th)}$	Gate-emitter threshold voltage	V_{GE}=V_{CE}, I_C=1mA	5.2	5.6	6.0	V
$V_{CE(sat)}$	Collector-emitter saturation voltage	V_{GE}=15 V, I_C=75A	-	2.0	-	V
		V_{GE}=15V, I_C=75A, T_{vj}=175	-	2.6	-	V

Dynamic characteristics

			.	.	.	
C_{ies}	Input capacitance	V_{CE}=30V V_{GE}=0V f=1MHz	-	18650	-	pF
C_{oes}	Output capacitance		-	340	-	pF
C_{res}	Reverse transfer capacitance		-	80	-	pF
Q_g	Total gate charge	V_{CC}=960V V_{GE}=15V I_C=75A	-	560	-	nC

All product information is copyrighted and subject to legal disclaimers.

(T_{vj}=25 unless otherwise specified)

			.	.	.	
V_F	Diode forward voltage	I_F=75A	-	2.1	-	V
		I_F=75A T_{vj}=175	-	1.8	-	V
t_{rr}	Diode reverse recovery time	V_R=600V I_F=75A di_F/dt=-600A/μs	-	163	-	ns
I_{rrm}	Diode peak reverse recovery current		-	20	-	A
Q_{rr}	Diode reverse recovery charge		-	2046	-	nC
t_{rr}	Diode reverse recovery time	V_R=600V I_F=75A di_F/dt=-600A/μs T_{vj}=175	-	278	-	ns
I_{rrm}	Diode peak reverse recovery current		-	39	-	A
Q_{rr}	Diode reverse recovery charge		-	6679	-	nC

All product information is copyrighted and subject to legal disclaimers.

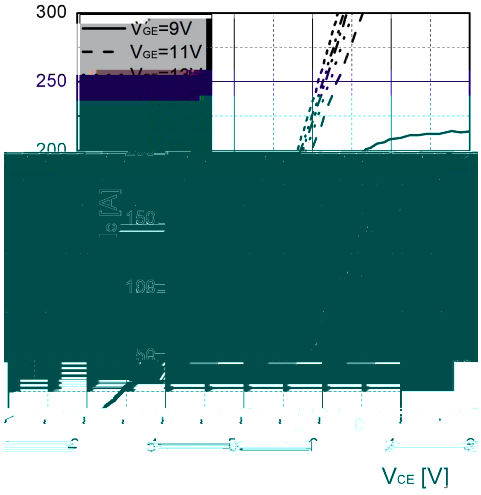


Fig 1. Typical output characteristic (T_{vj}=25)

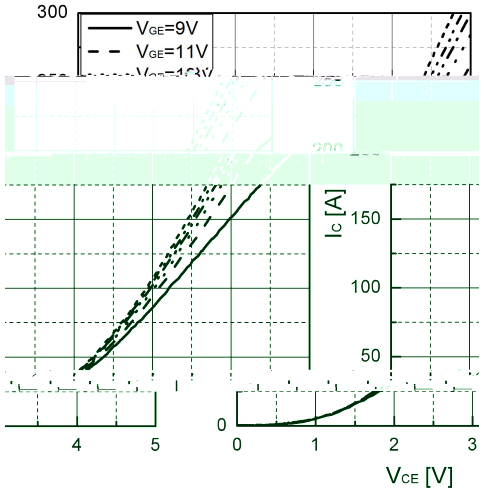


Fig 2. Typical output characteristic(T_{vj}=175)

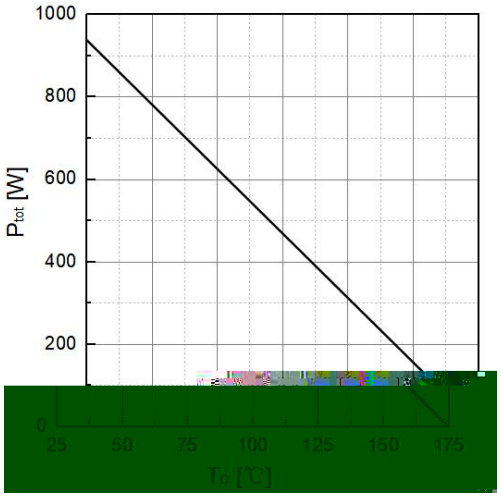


Fig 3. Power dissipation as a function of T_C

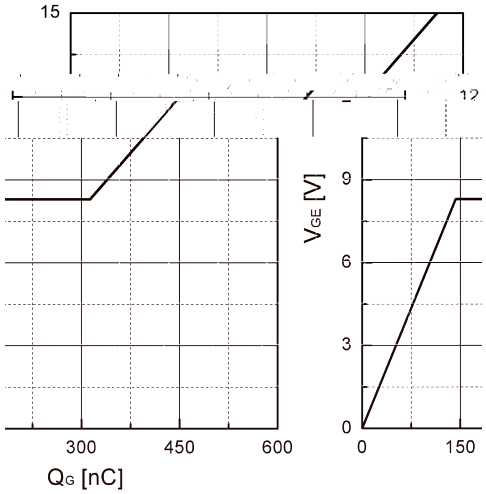


Fig 4. Typical Gate charge

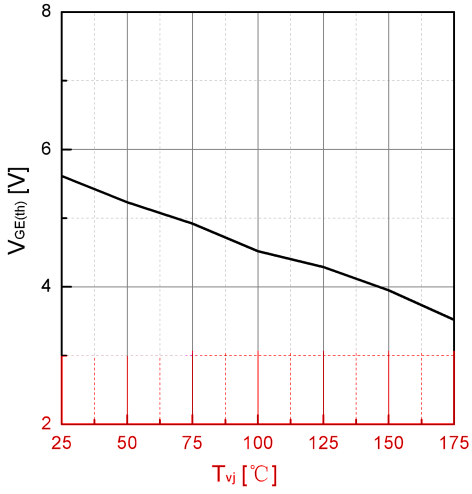


Fig 5. Typical $V_{GE(th)}$ as a function of T_{vj} (I_C=1mA)

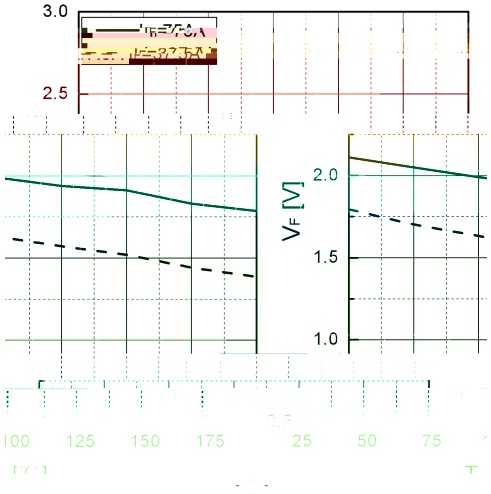


Fig 6. Typical V_F as a function of T_{vj}

All product information is copyrighted and subject to legal disclaimers.

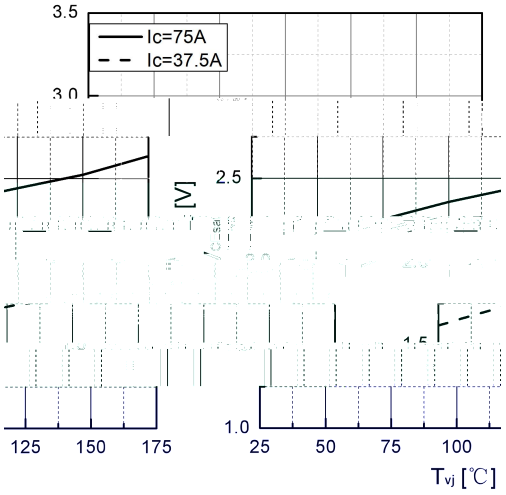


Fig 7. Typical V_{CEsat} as a function of T_{vj}

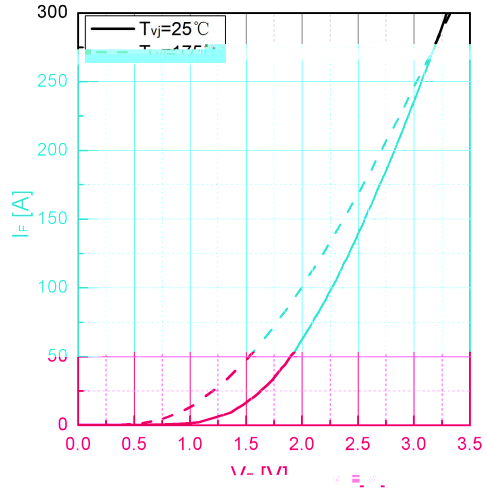


Fig 8. Typical I_F as a function of V_F

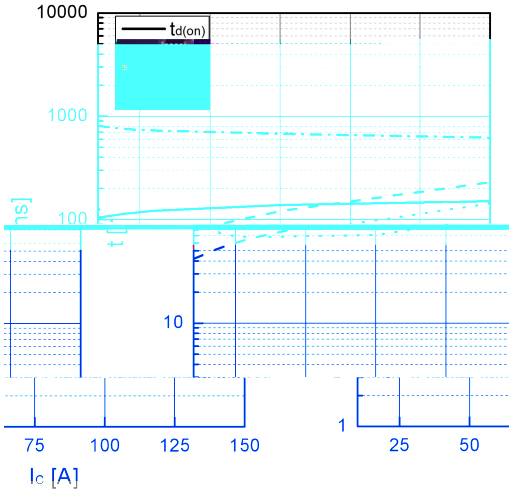


Fig 9. Typical switching time as a function of I_C

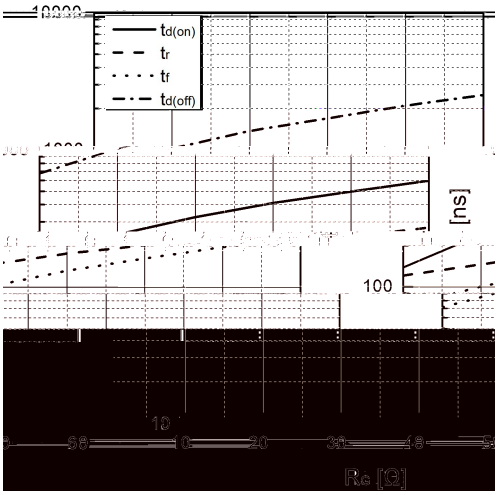


Fig 10. Typical switching times as a function of R_G

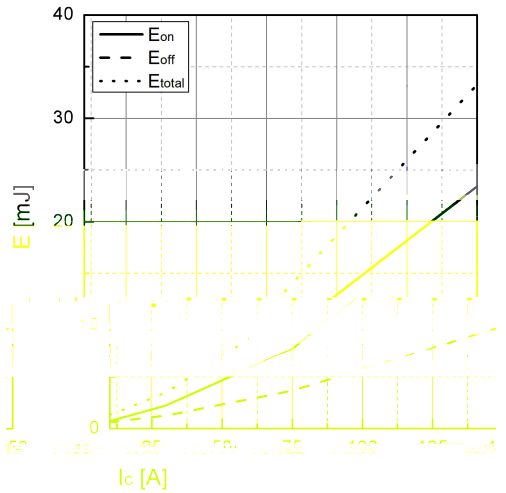


Fig 11. Typical switching energy losses as a function of I_C

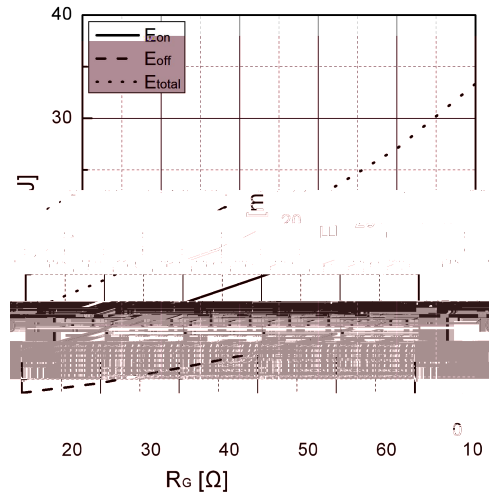


Fig 12. Typical switching energy losses as a function of R_G

All product information is copyrighted and subject to legal disclaimers.

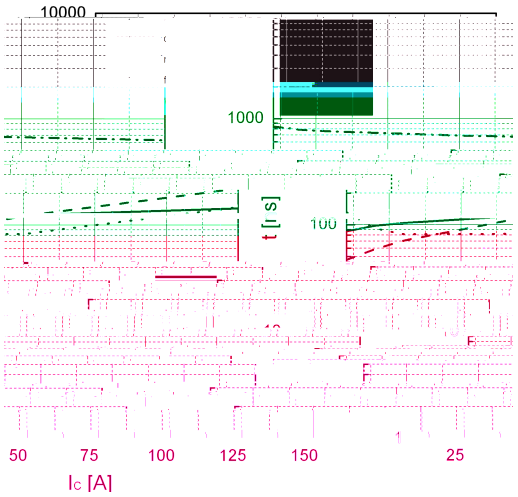


Fig 13. Typical switching time as a function of I_C (T_{vj}=175)

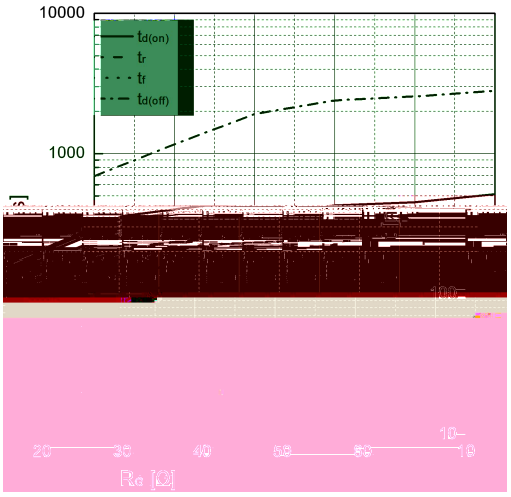


Fig 14. Typical switching times as a function of R_G (T_{vj}=175)

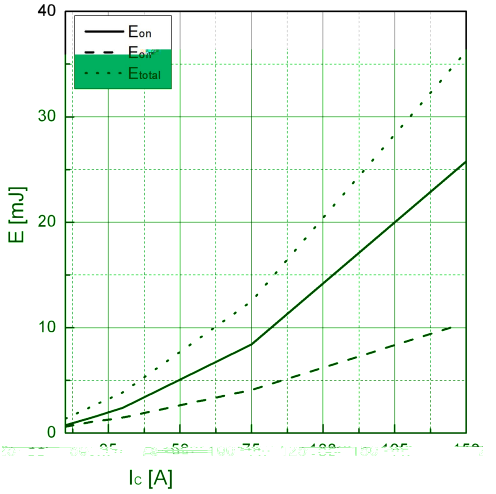


Fig 15. Typical switching energy losses as a function of I_C (T_{vj}=175)

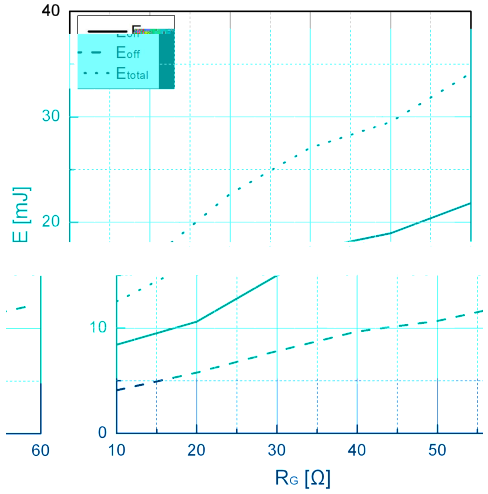


Fig 16. Typical switching energy losses as a function of R_G (T_{vj}=175)



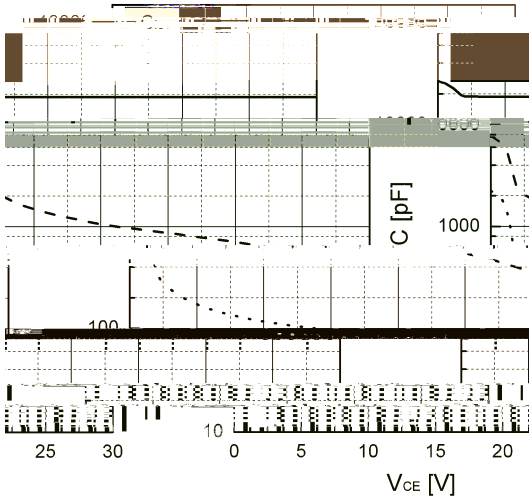


Fig 17. Typical capacitance as a function of V_{CE} (f=1Mhz, V_{GE} * z

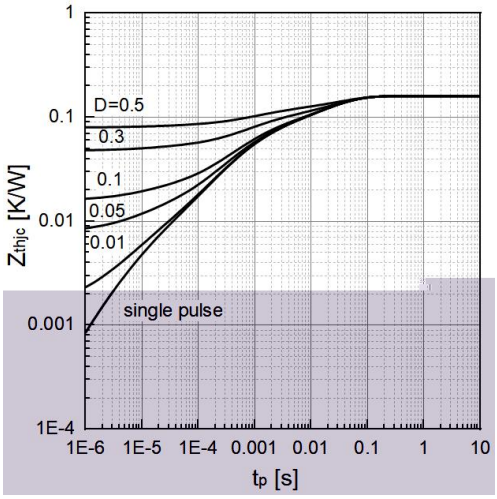

All product information is copyrighted and subject to legal disclaimers.

TO-247PLUS

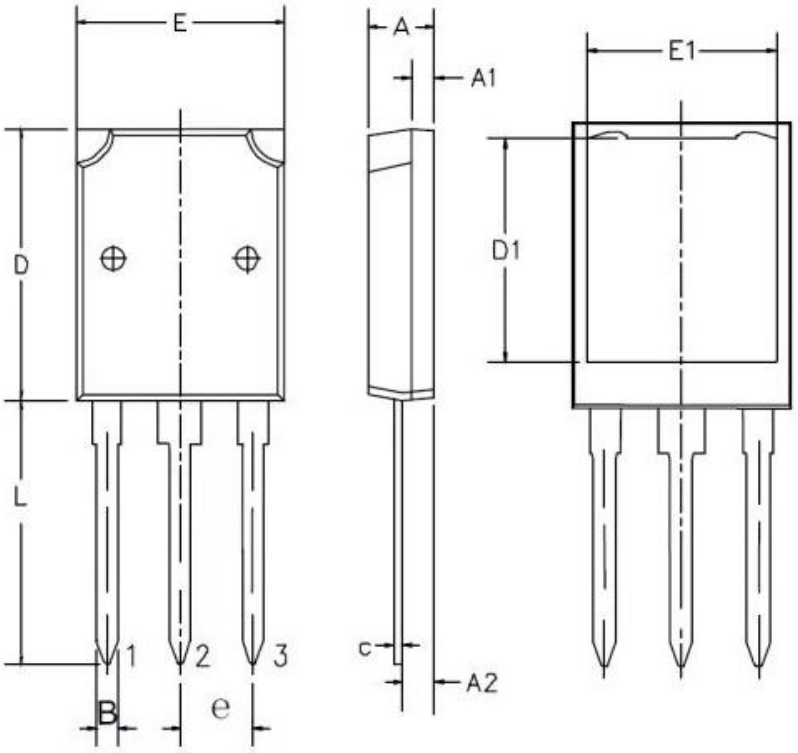

Ref.	Min.(mm)	Typ.(mm)	Max.(mm)
A	4.92	5.00	5.08
A2	2.27	2.35	2.43
A1	1.92	2.00	2.08
B	1.16	1.20	1.24
C	0.56	0.60	0.64
D	20.70	20.90	21.1
E	15.80	15.90	16.00
E1	13.92	14.02	14.12
e	5.34	5.44	5.54
L	19.80	20.00	20.20

All product information is copyrighted and subject to legal disclaimers.

Date	Revision	Changes
2025-01-26	Rev. 1.2	Add SOA and Rth graph
2025-02-17	Rev. 1.3	Modify the package size
2025-03-03	Rev. 2.0	Replace sketch
2026-06-26	Rev. 2.1	Update thermal

PLEASE NOTE - Jiangsu JieJie Microelectronics Co., Ltd ("JJM") reserves the right to amend, correct, modify

All product information is copyrighted and subject to legal disclaimers.