





°C		

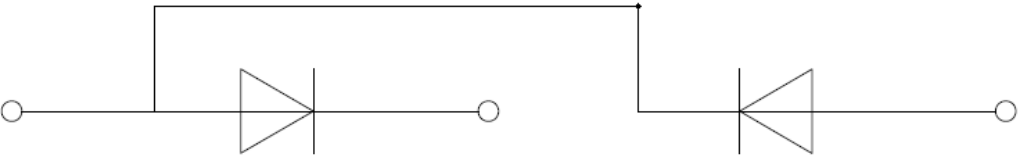

	°C			

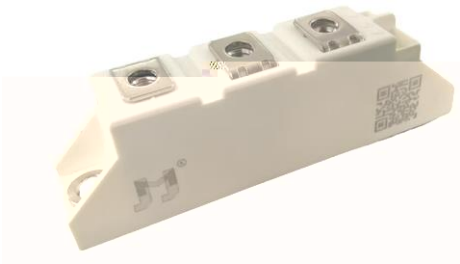

	°C					
	°C					
	°C					
						Ω

						01

FIG 1: Forward characteristic (per diode)

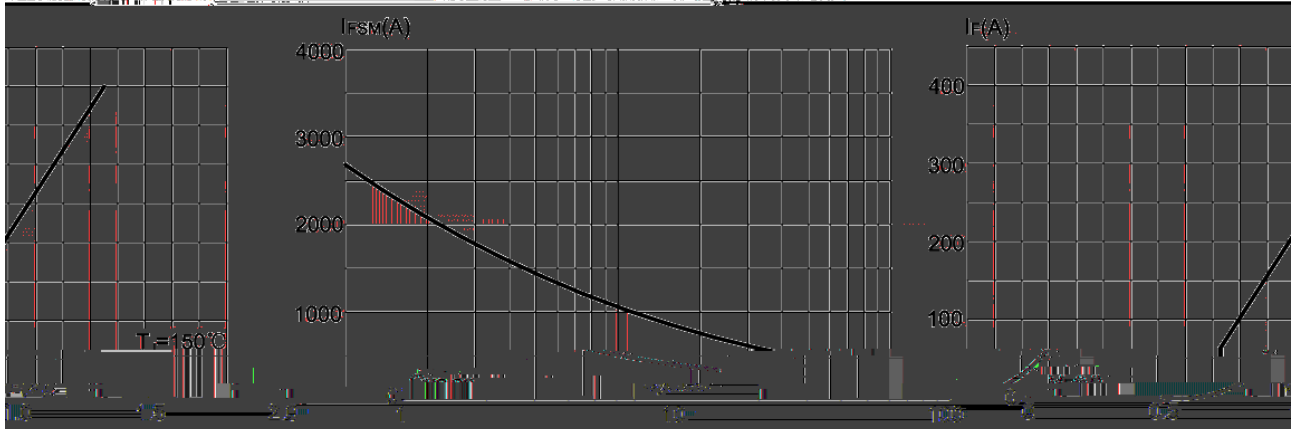


FIG 2: Forward current

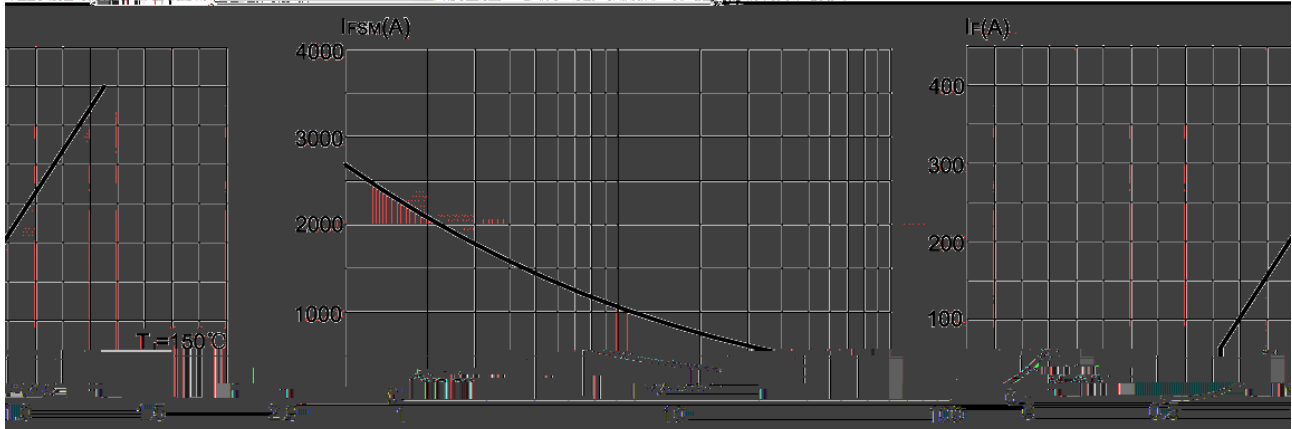


FIG 3: Maximum transient thermal impedance function-to-case (per diode)

FIG 4: Maximum transient thermal impedance

FIG 5: Forward current

