



°C



	°C					
	°C					
	°C					
						Ω

			±		

FIG 1: Forward characteristic (per diode)

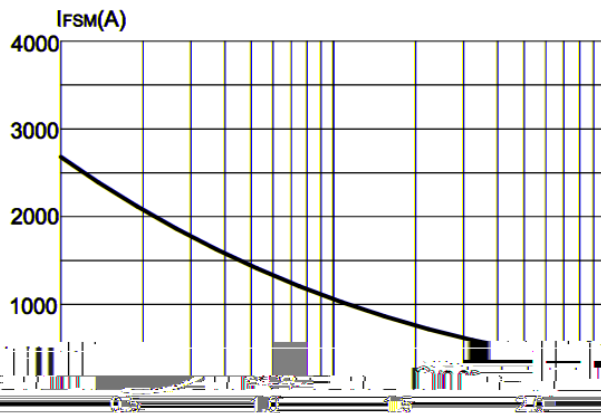
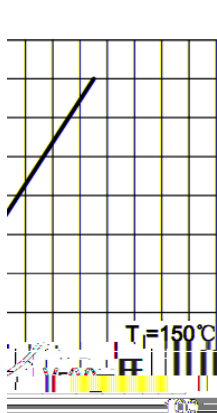


FIG 2: Reverse static characteristic (per diode)

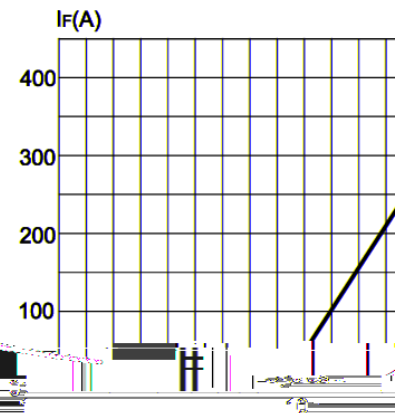


FIG 3: Forward current vs. case temperature



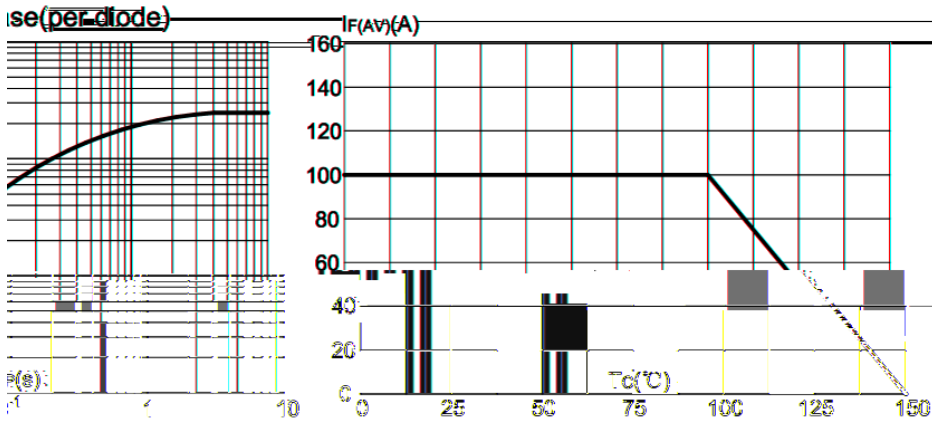


FIG 4: Maximum transient thermal

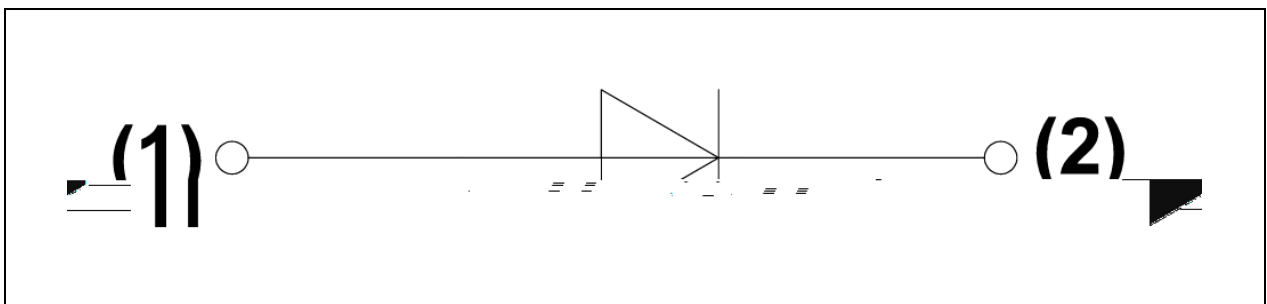

A视图

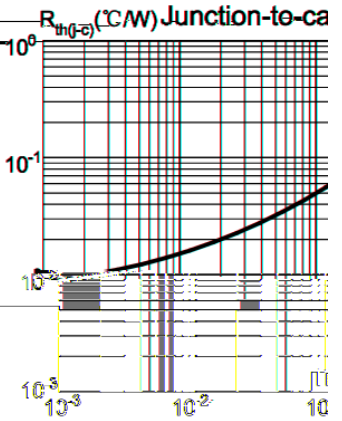