




1

2) , °C		
2)		
/		

,
2
-,



) , ,

	,			
	,			
	, ,	2		
/	°C 1	2		
2		2		
	, 1	2		
3		3		

FIG 1: Forward characteristics (see slide)

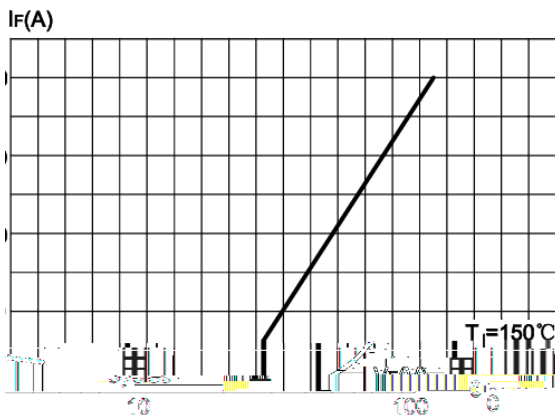


FIG 2: Reverse static characteristics

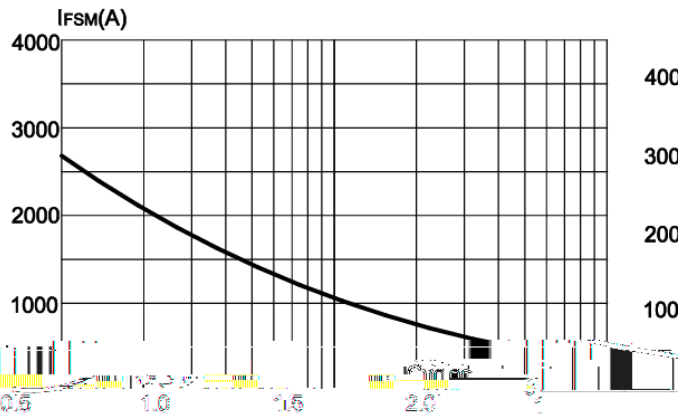


FIG 3: Forward current vs. case temperature

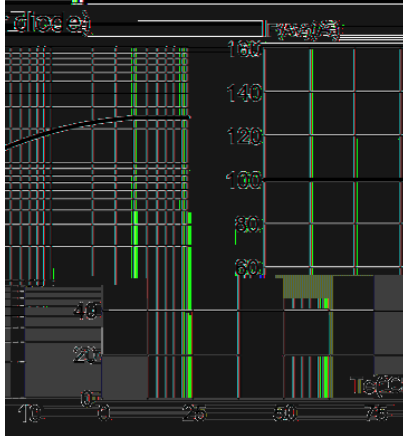


FIG 4: Maximum transient thermal impedance




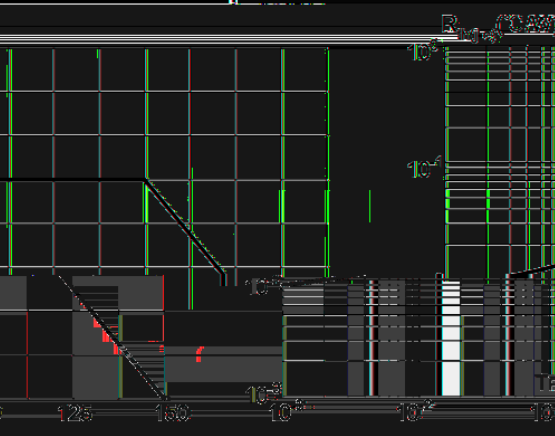


FIG 5: Maximum

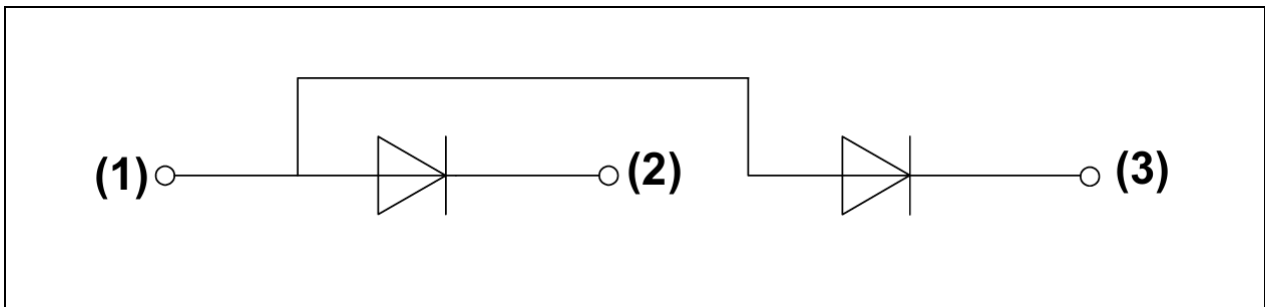

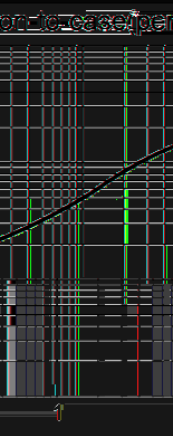

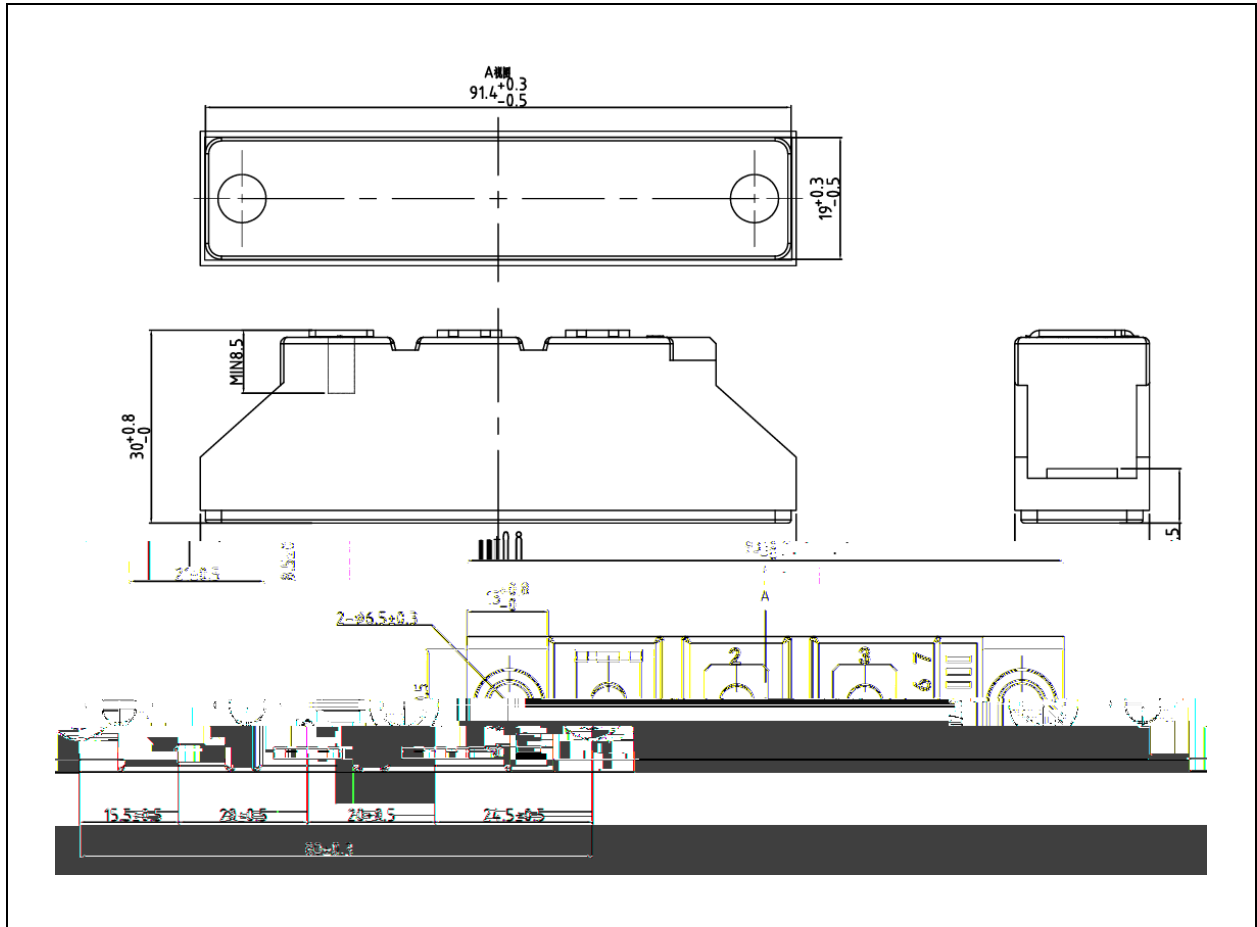

2
3

3 3

,

1

3

3 3

3

3 3



3

3 3

,

3

3 3

,

3

3 3

,