





istance,/30A4m-US



FIG.1: Forward characteristics(per diode)


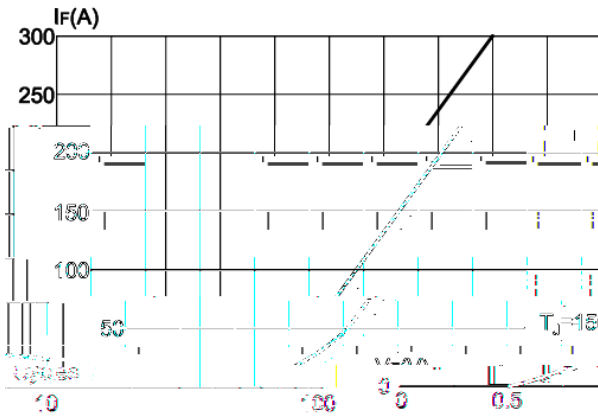


FIG.2: Peak on-state surge current

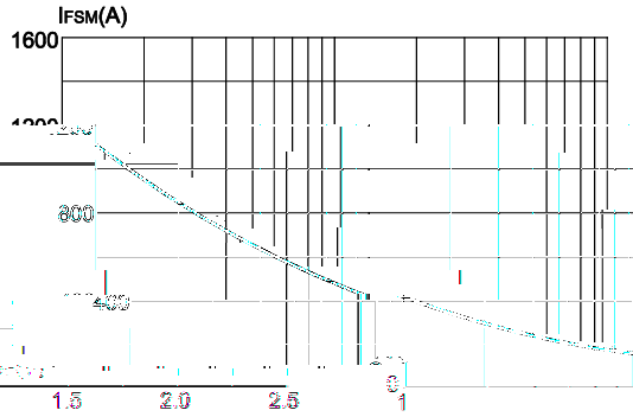

Transient thermal impedance to-case(per diode)

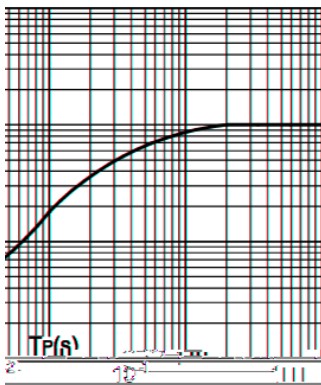


FIG.3: Forward current vs. case temperature

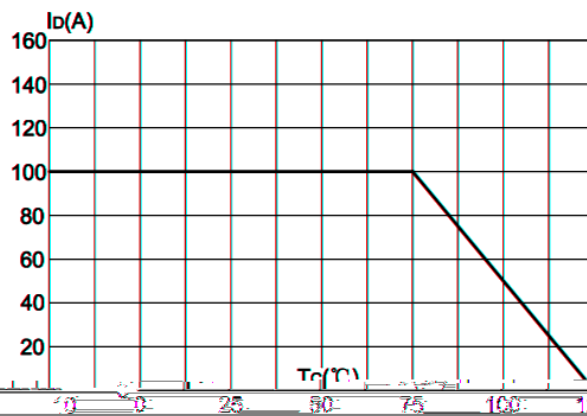


FIG.4: Maximum transient thermal impedance

