

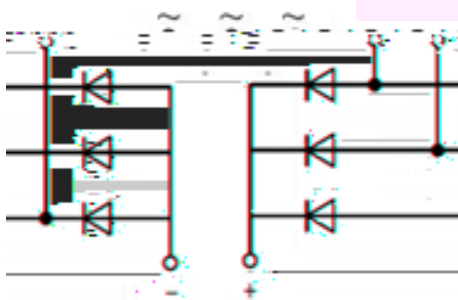
A white, rectangular terminal block with four screw terminals. The block has a QR code on its side and a small 'H' logo. It is shown against a white background.[illegible]



FIG.1: Forward characteristics(per diode)

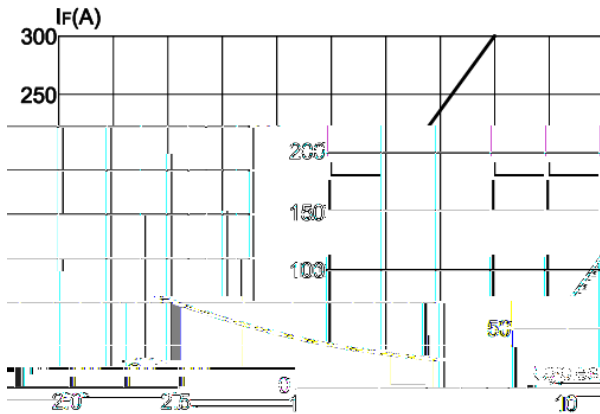


FIG.2: Peak on-state surge current

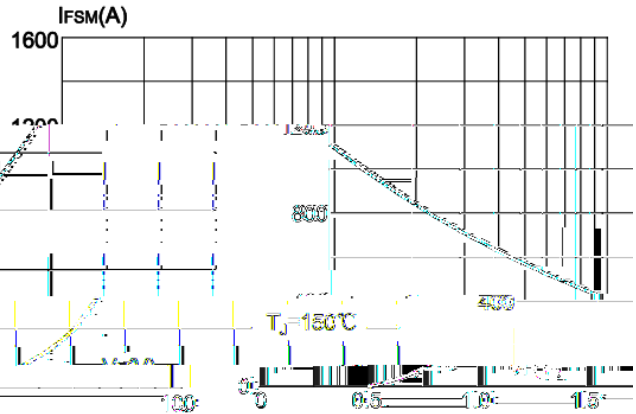


FIG.3: Forward current vs. case temperature

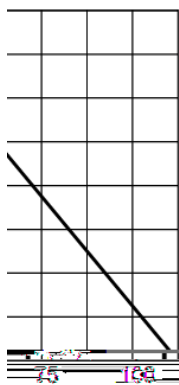


FIG.4: Maximum transient thermal impedance
 $R_{th(j-c)}$ (°C/W) Junction-to-case(per diode)

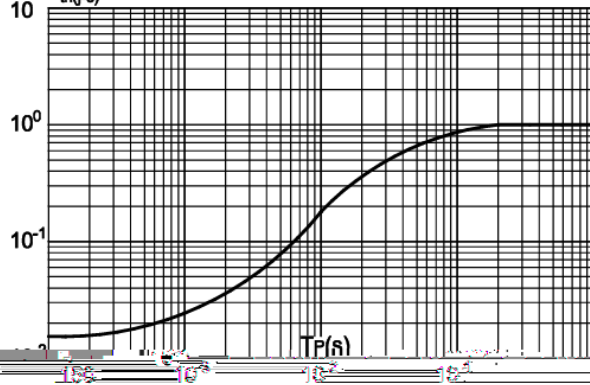


FIG.5: Forward current vs. case temperature

