



	°C			

FIG 1: Forward characteristics (per diode)

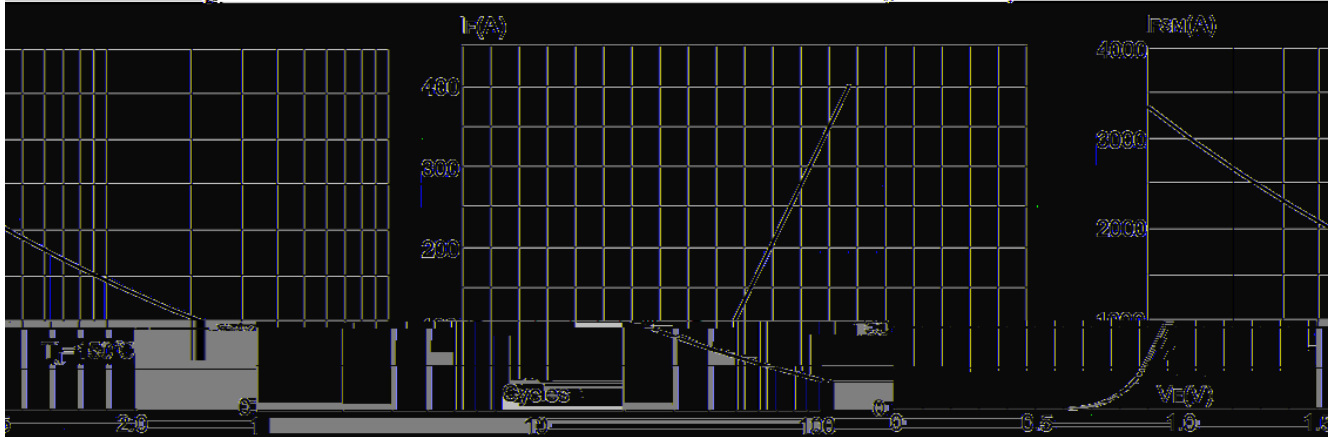


FIG 2: Reverse state surge current

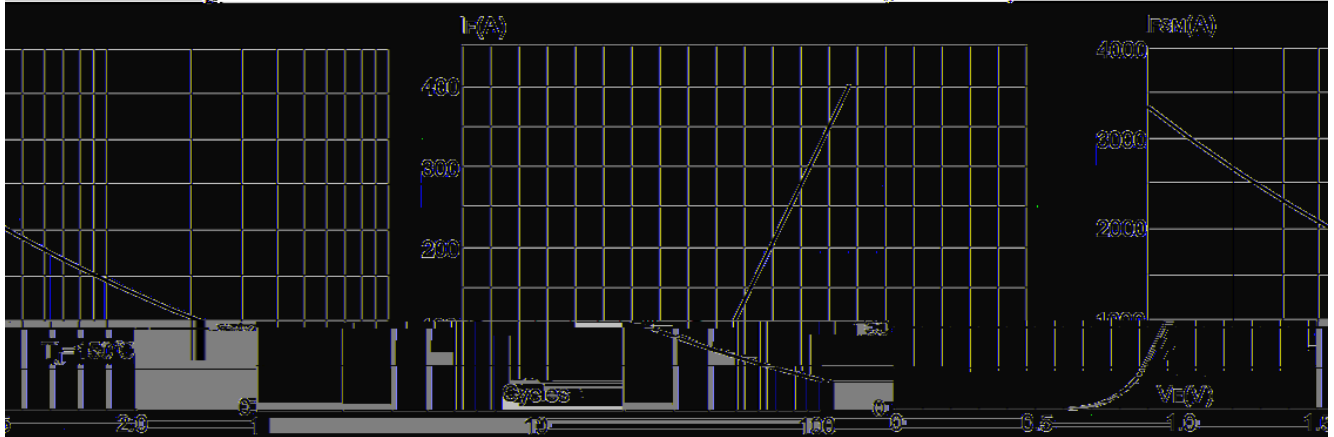


FIG 3: Forward current vs. case temperature

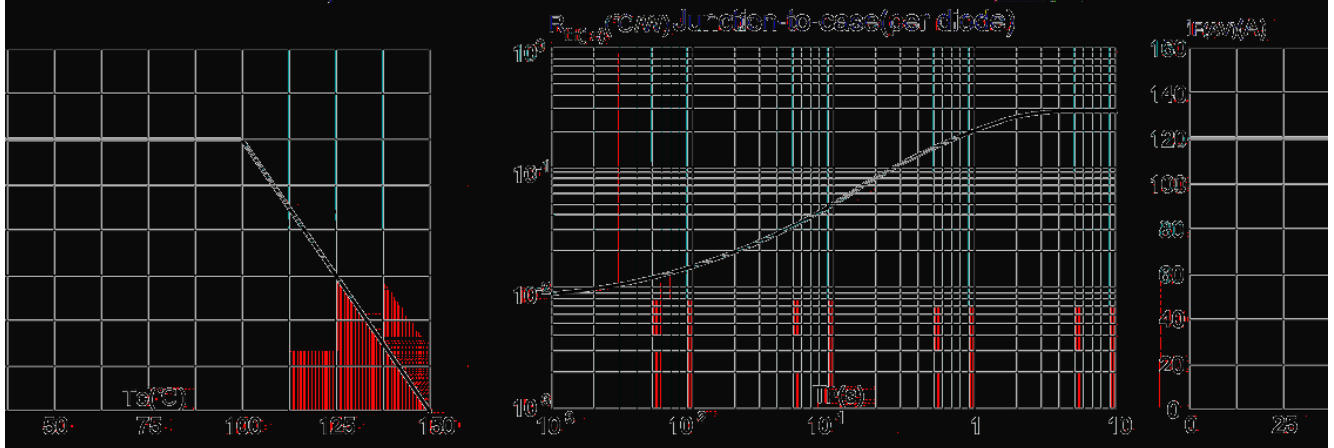


FIG 4: Maximum transient thermal impedance

