



	°C					

FIG 1: Forward characteristics(per diode)

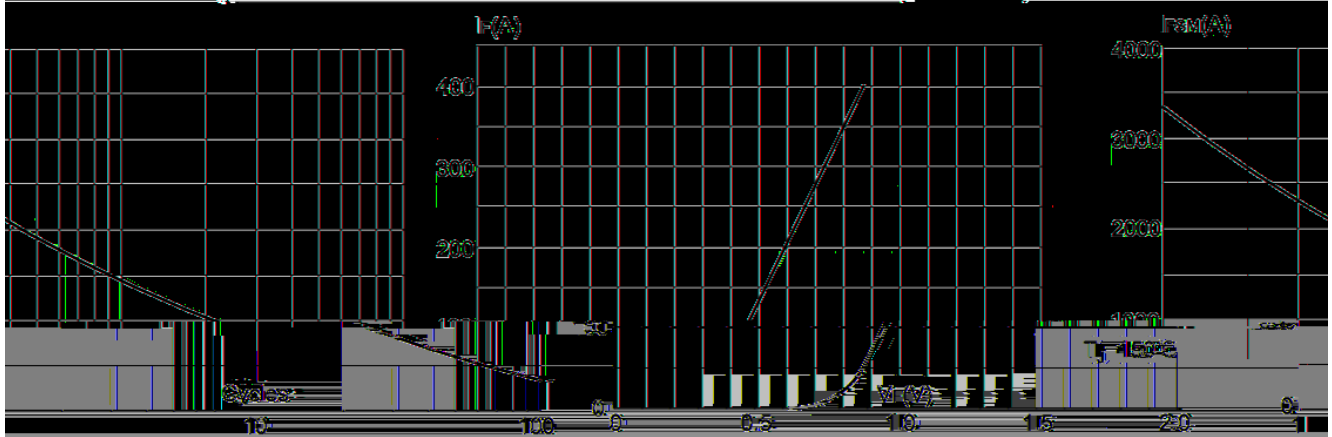


FIG 2: Reverse state surge current

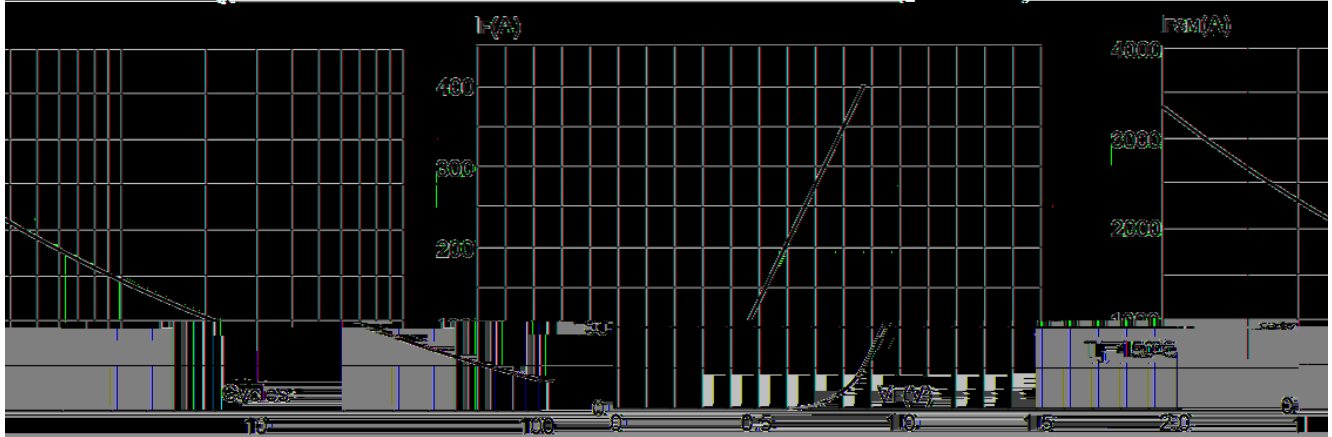


FIG 4: Maximum transient thermal impedance

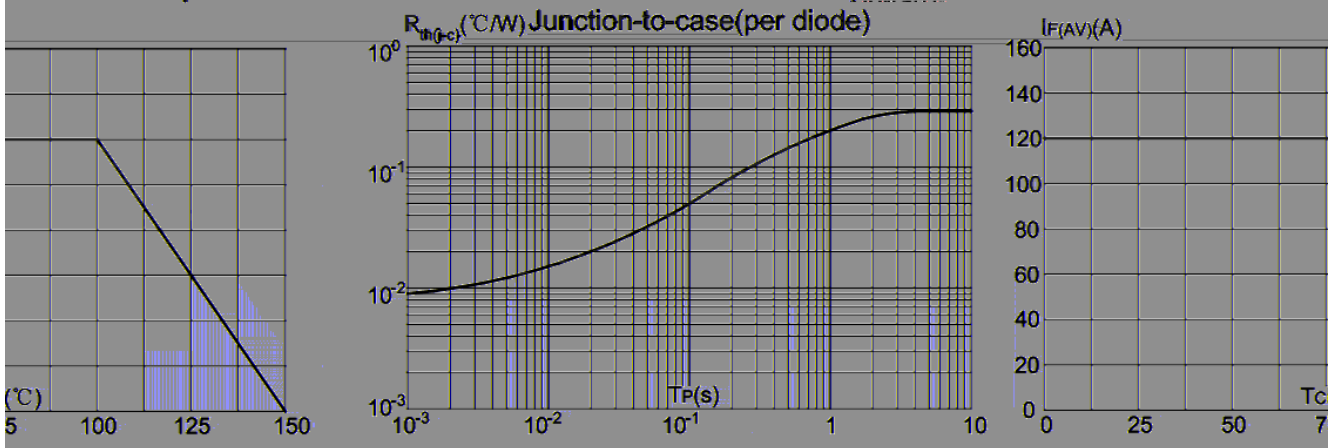


FIG 3: Forward current vs. case temperature

