



B B B B B



a XigXVa VgVXi ghi Xh

EVgVb i g	dcYi dch	Hnb Wla	KVa h			Jc i
			B c	I ne	B Vm	
	°C					
	°C					
	°C					
	°C					

I gb Va VgVXi ghi Xh

EVgVb i g	dcYi dch	Hnb Wla	KVa h			Jc i
			B c	I ne	B Vm	

DgY gc c dgb V dc

k X	BVg c	EVX V	L i	cc g dm	E g Vgdc



I ne XVa a XigXVa I gp Va VgVX ghi Xh

FIG.1: Forward characteristics(per diode)




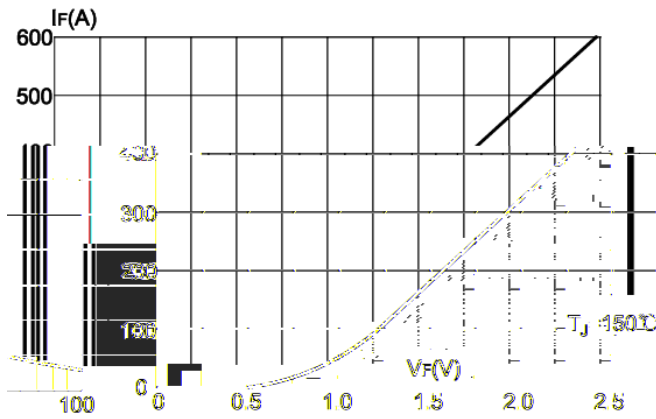



FIG.2: Peak on-state surge current

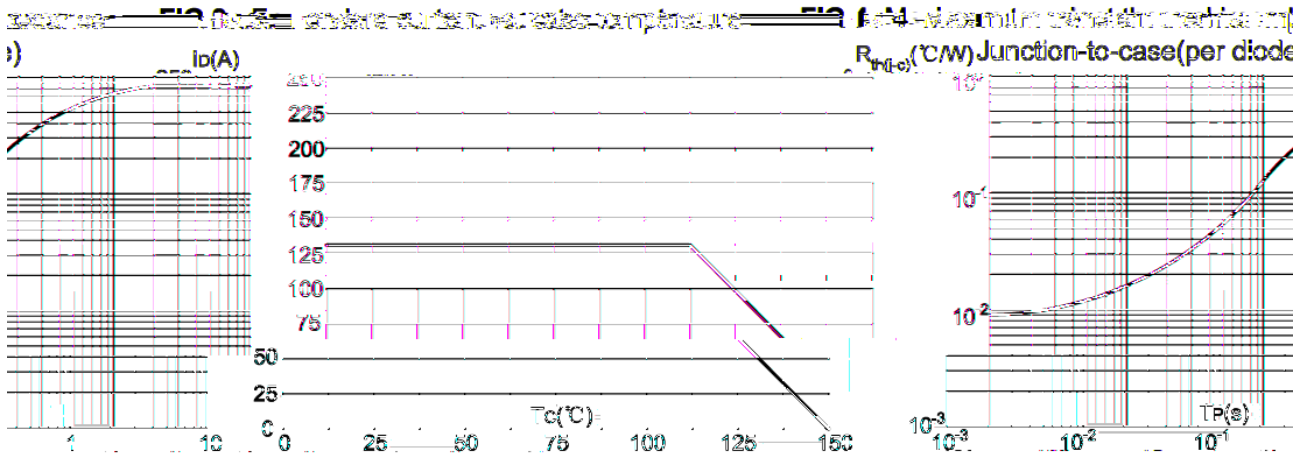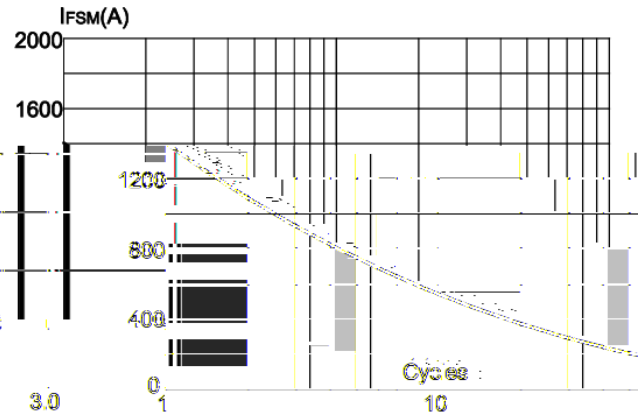

gX i V gvb

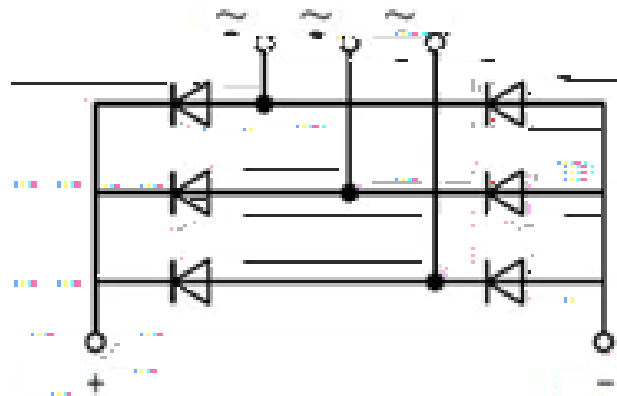

EVX V D iac h b b

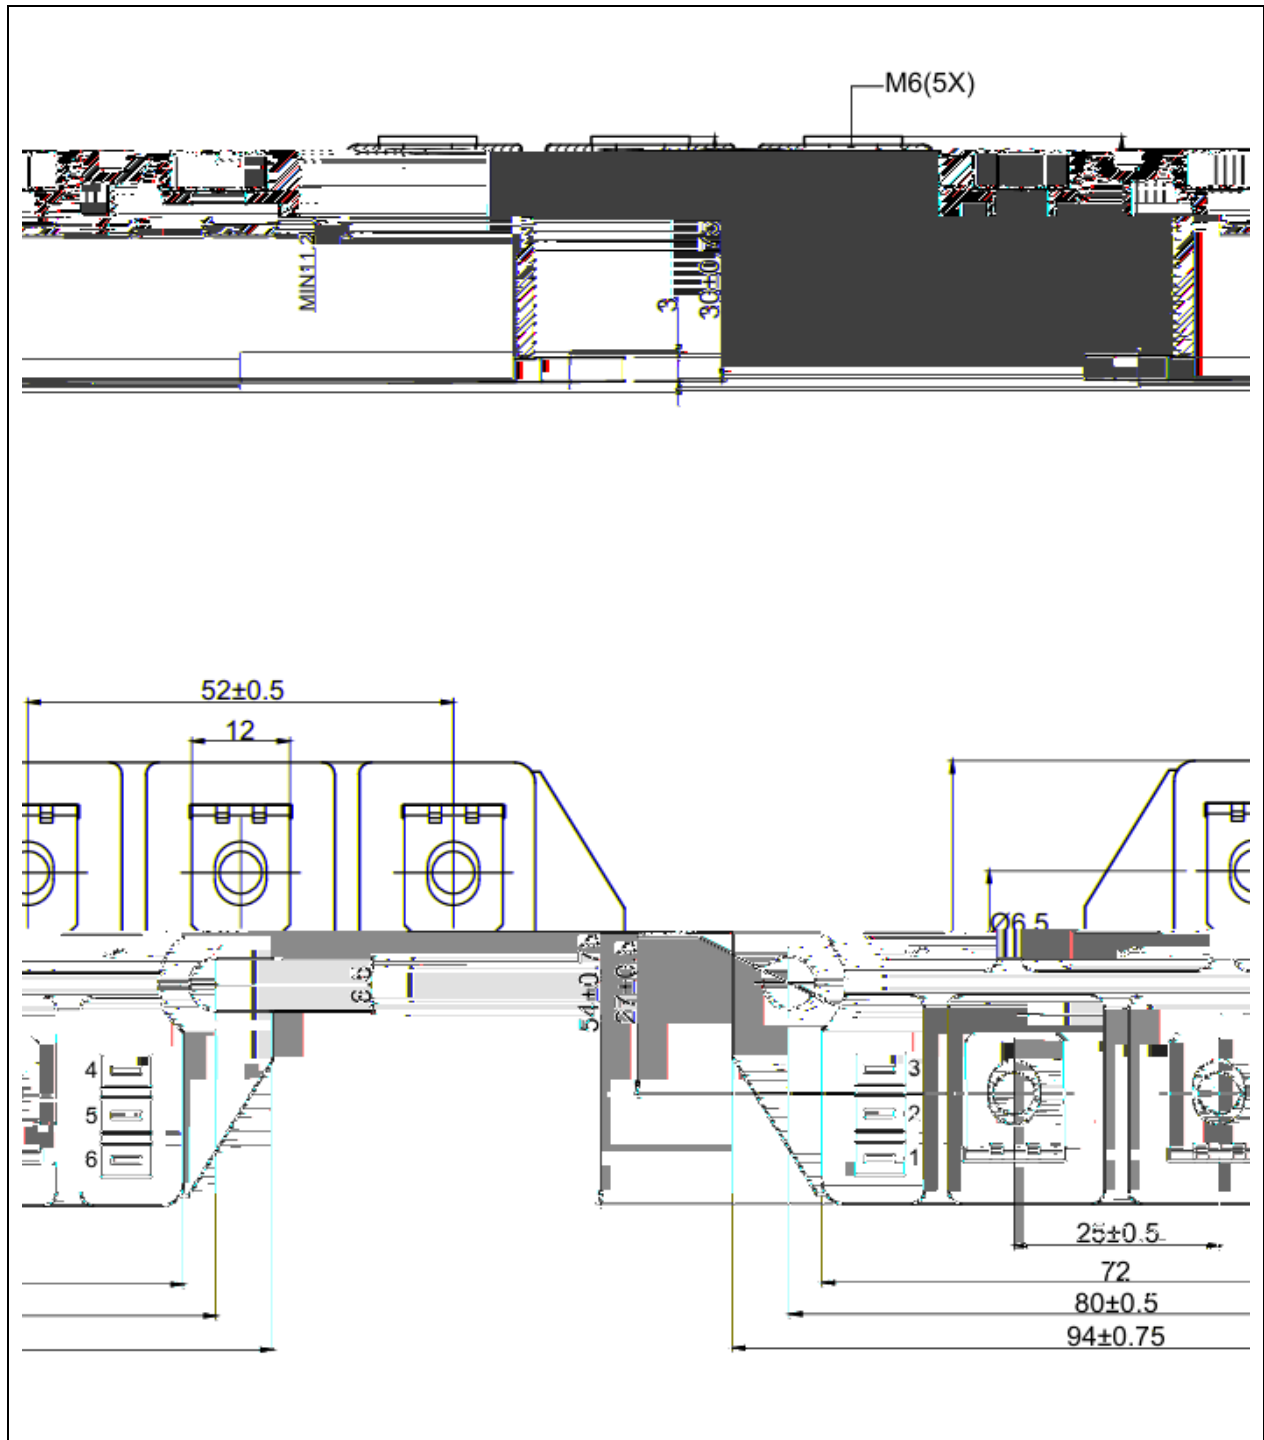



B & I &