



A H &


H fYYD UgYFYW Yf 6 f X Y AcXi Y

YUhi fYg

DfcXi WGi a a Ufm

DUfUa YhYf	JU i Y	I b h

dd WUhcBg

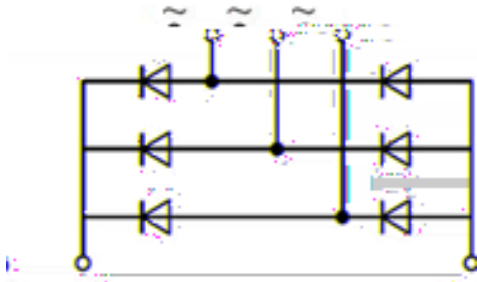

Vgc i hY AU a i a FUhb g

DUfUa YhYf	cbXhcBg	Gra Vc	JU i Yg	I b h
	°C			
	°C			
				°C



A H &

YVWf WU UfUWYf gh Vg

DUfUa YhYf	cbXhcbg	Gma Vc	JU i Yg			l b h
			A b"	Hmd"	AU "	
	°C					
	°C					
	°C					
	°C					

H Yfa U UfUWYf gh Vg

DUfUa YhYf	cbXhcbg	Gma Vc	JU i Yg			l b h
			A b"	Hmd"	AU "	

CfXYf b b cfa Uhcb

Y Wf	AUf b	DUWU Y	K Y h	bbYf 6cl	DYf Uffcb

Hmd WU YWf WU H Yfa U UfUWYf gh Vg

FIG.1: Forward characteristics(per diode)

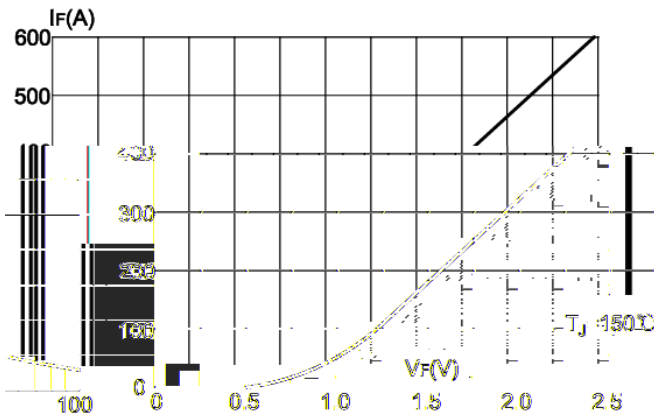


FIG.2: Peak on-state surge current

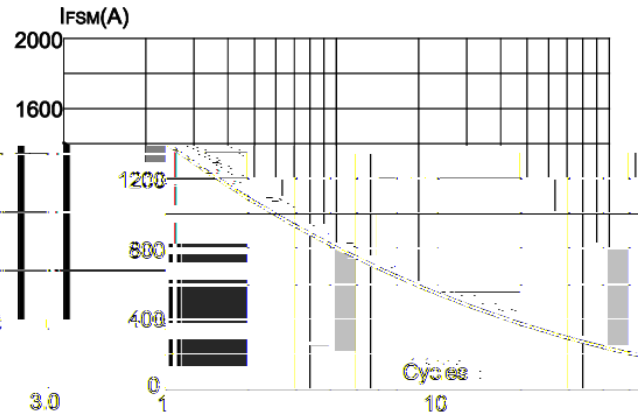


FIG.3: Reverse characteristics (per diode)



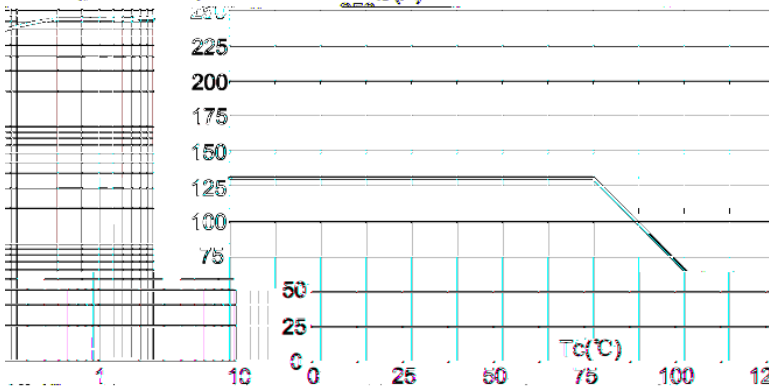



FIG.4: Thermal resistance

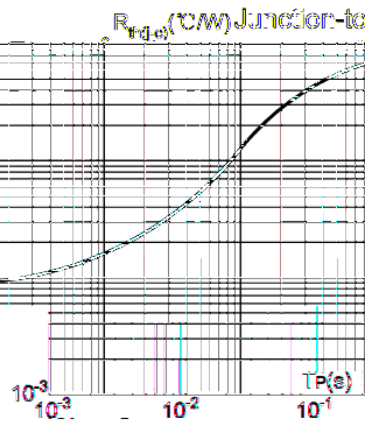

fW h U fUa

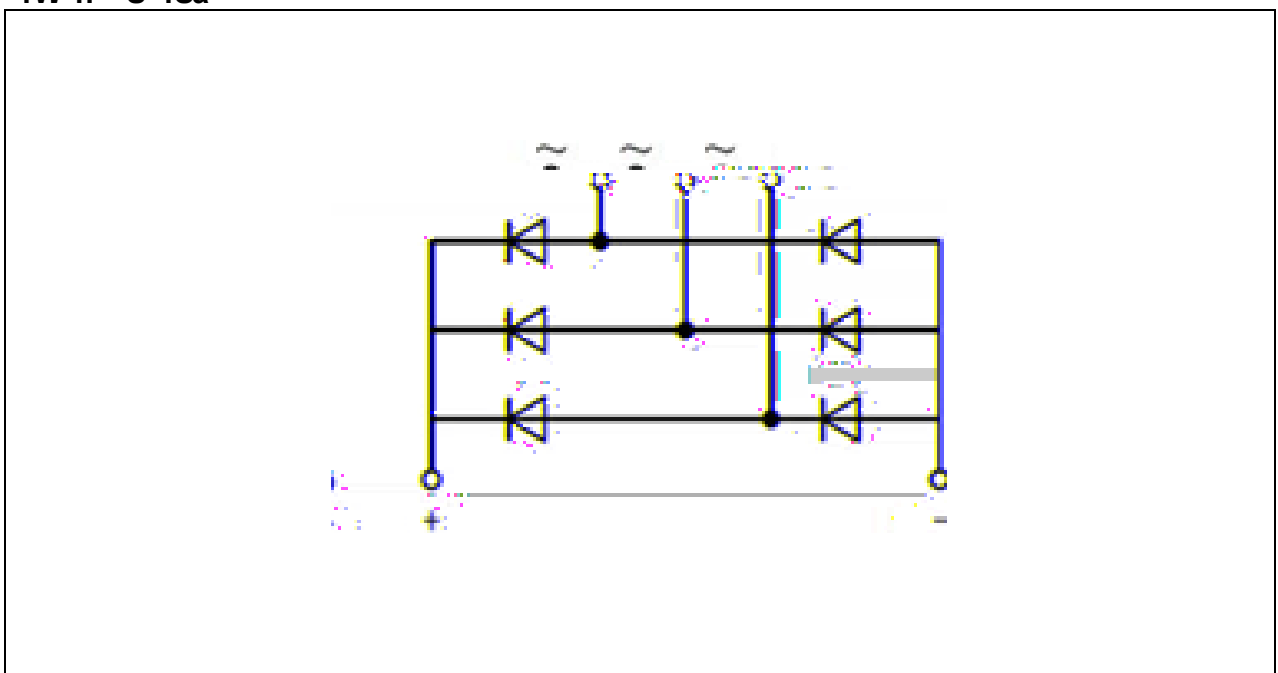

DUWU YCi h bYg a a □

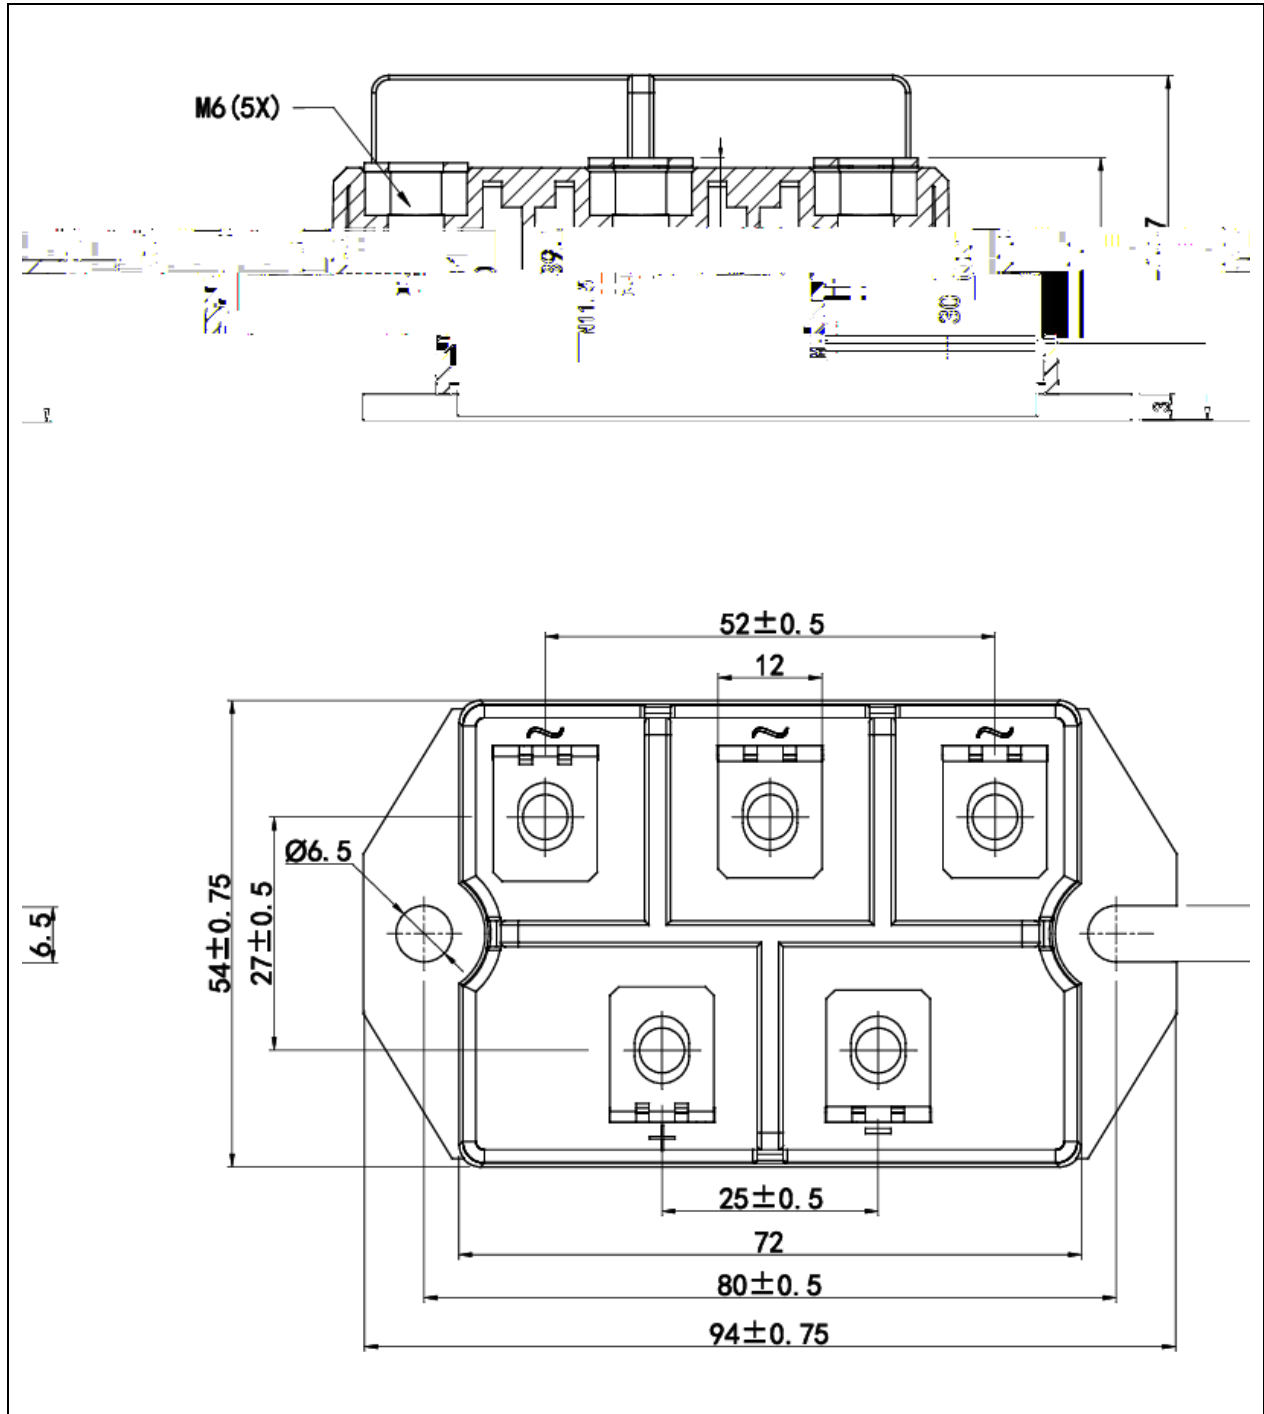



A H &

