





	°C					
	°C					
	°C					
	°C					



FIG.1: Forward characteristics(per diode)

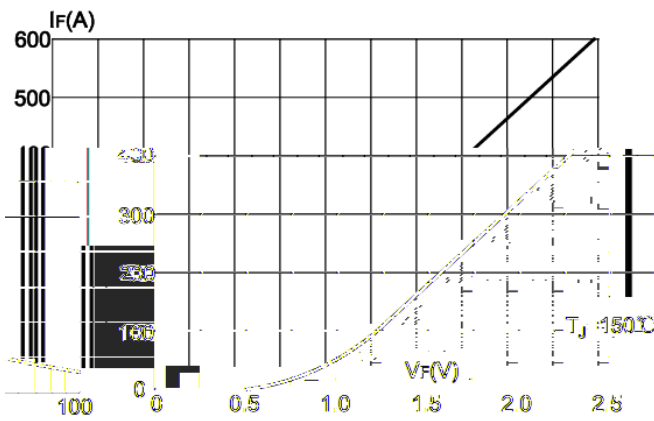


FIG.2: Peak on-state surge current

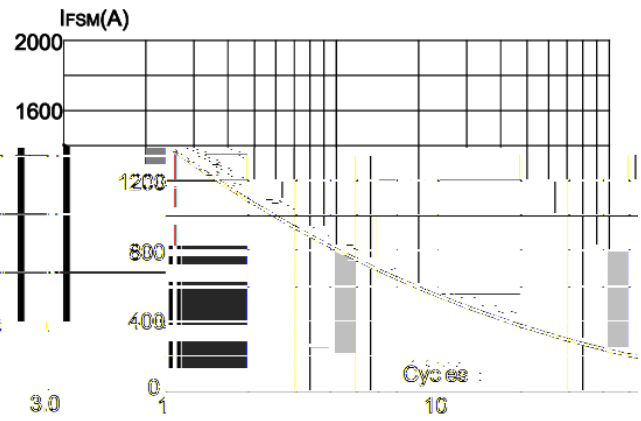


FIG.3: Thermal resistance (cw) Junction-to-case(per diode)

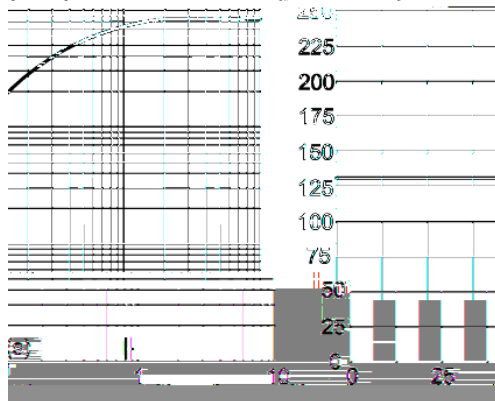


FIG.4: Thermal resistance (pw) Junction-to-case(per diode)

