




" (



| °C |  |  |
|----|--|--|
|    |  |  |
|    |  |  |

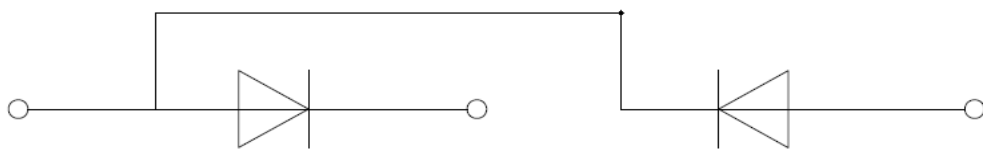

|  | °C |  |  |  |
|--|----|--|--|--|
|  |    |  |  |  |
|  |    |  |  |  |
|  |    |  |  |  |
|  |    |  |  |  |



" (

|  |  |  |  |  |
|--|--|--|--|--|
|  |  |  |  |  |
|  |  |  |  |  |







**FIG.1: Forward characteristics(per diode)**

**FIG.2: Peak on-state surge current**

**FIG.3: Forward current vs. case temperature**

**FIG.4: Maximum transient thermal impedance**

**FIG.5: Forward current vs. case temperature**

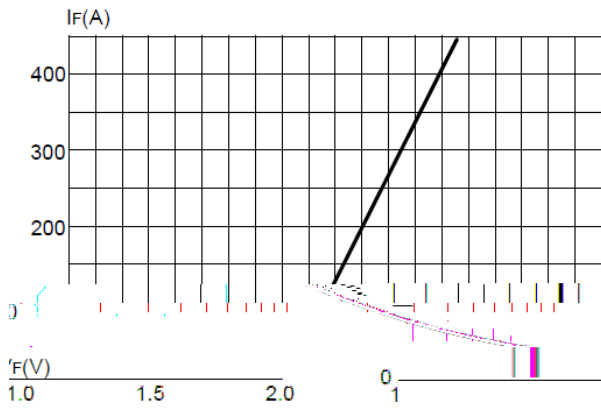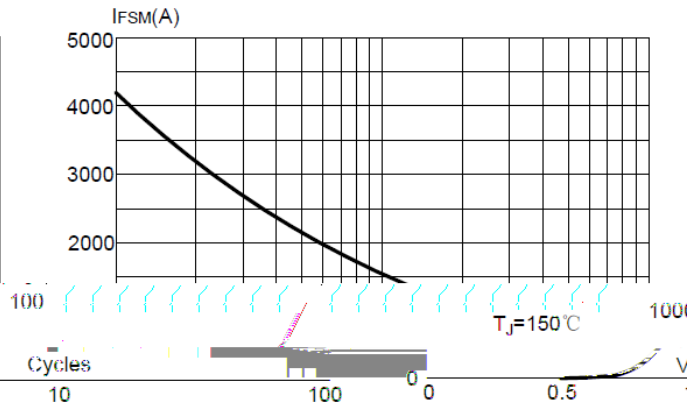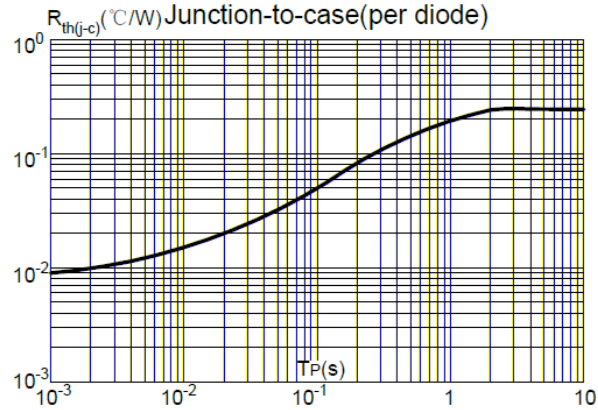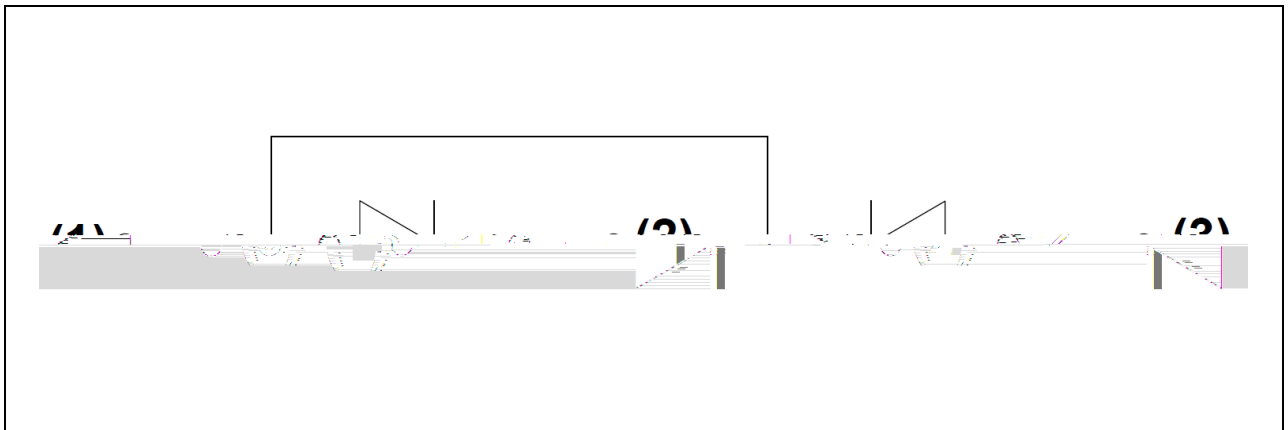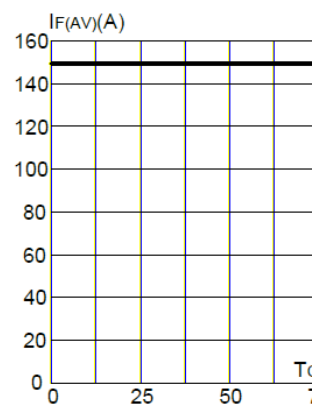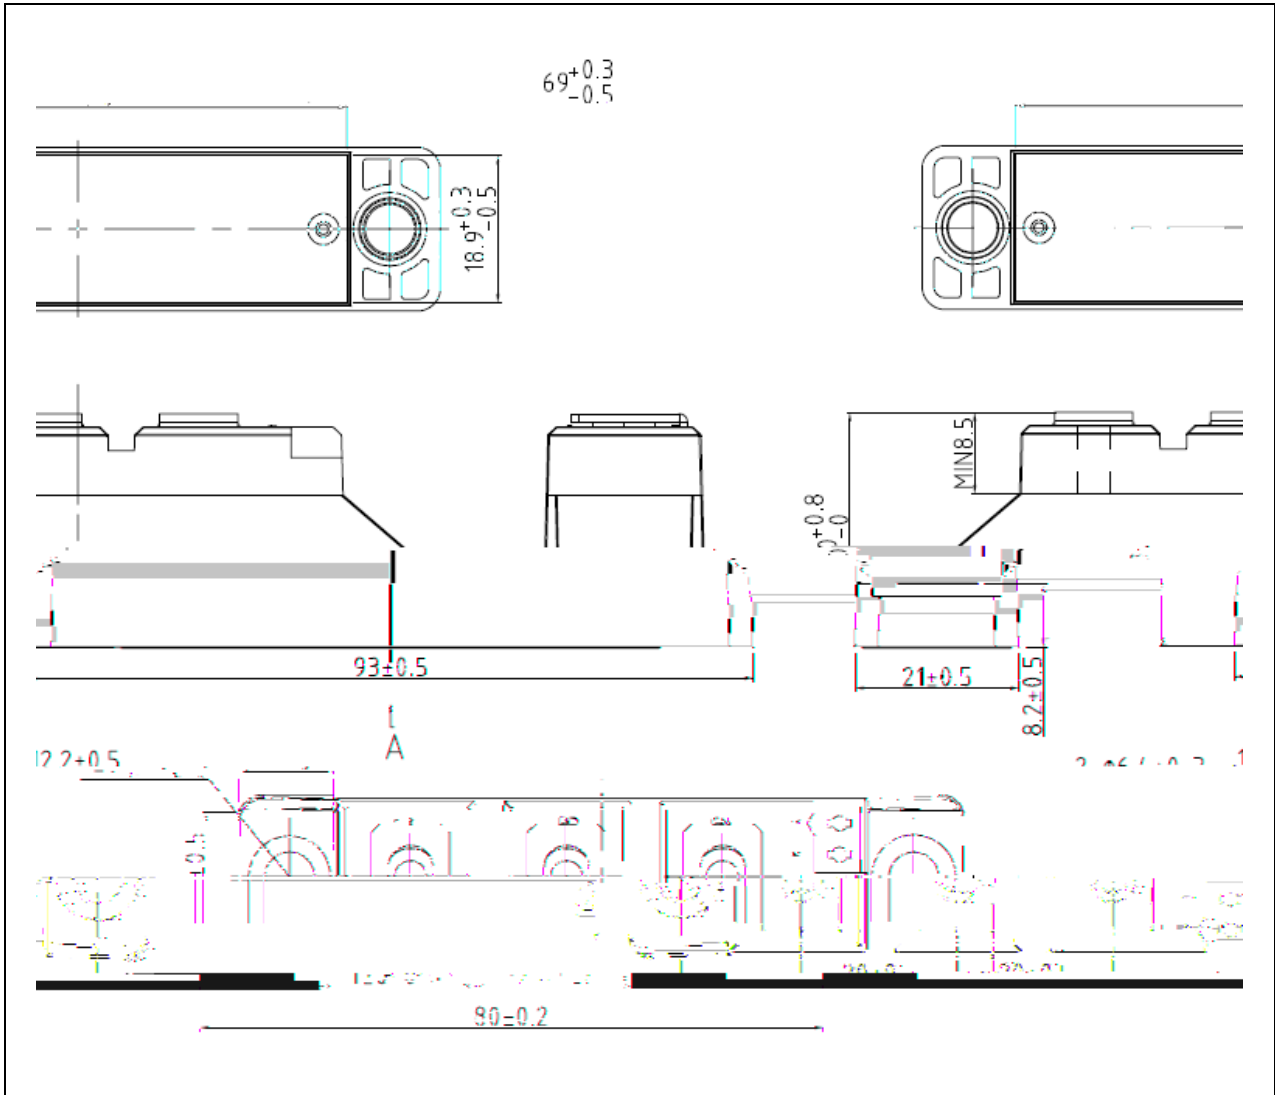




" (

