





FIG.1: Forward characteristics(per diode)


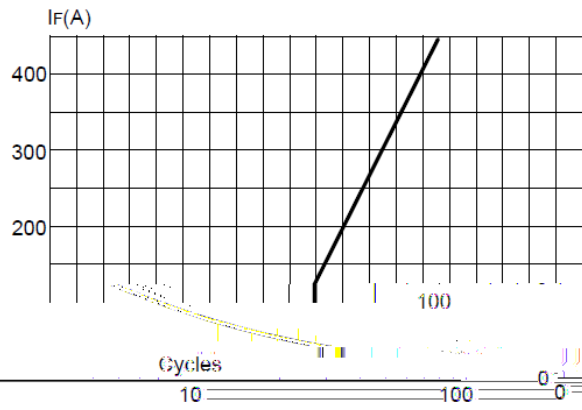


FIG.2: Peak on-state surge current

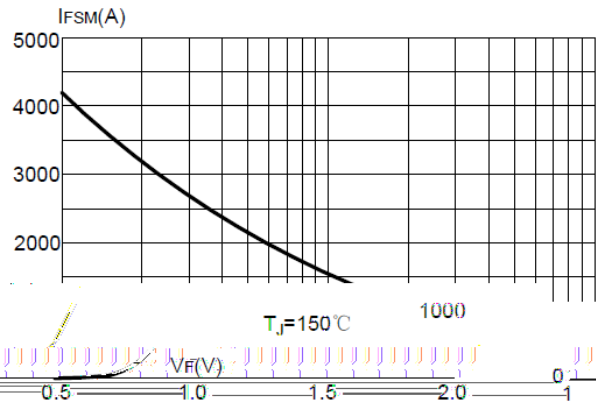

**Maximum transient thermal impedance
C/W) Junction-to-case(per diode)**

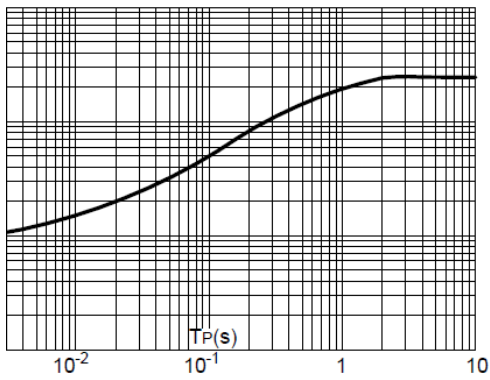


FIG.3: Forward current vs. case temperature

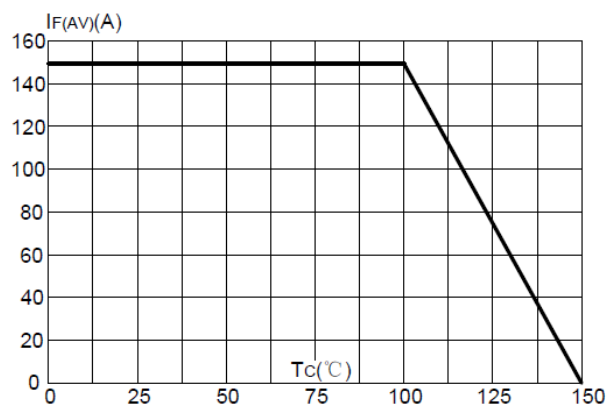


FIG.4:

