

	°C			
	°C			
				°C
				°C



	°C					
	°C					
	°C					
	°C					

						°C



FIG 1: Forward characteristics(per diode)


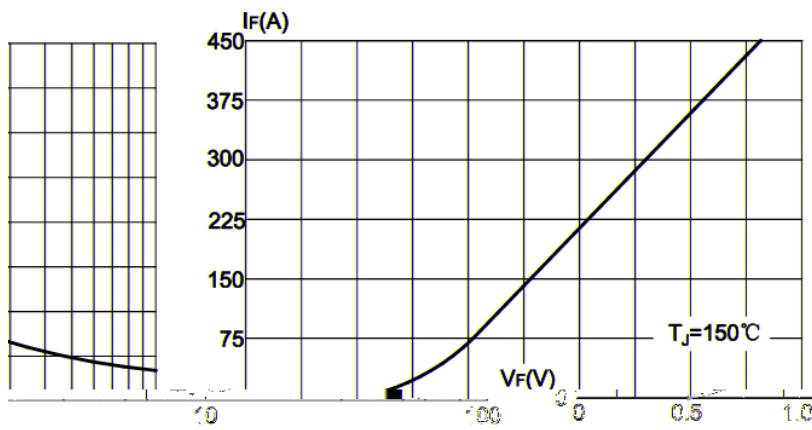


FIG 2: Peak on-state surge current

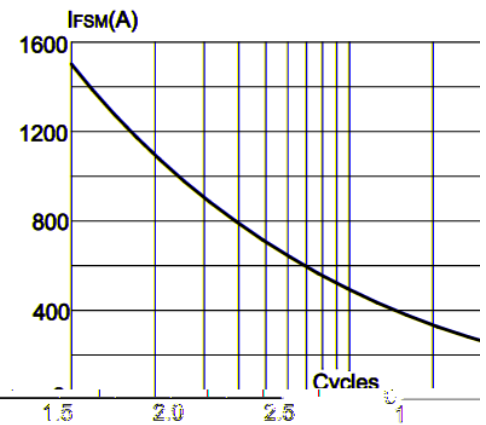

Maximum transient thermal impedance

FIG 3: Forward current vs. case temperature

FIG 4: M

