

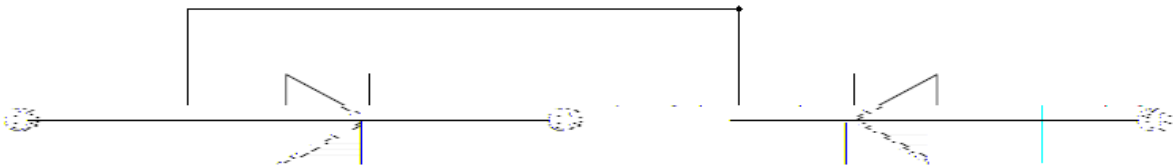
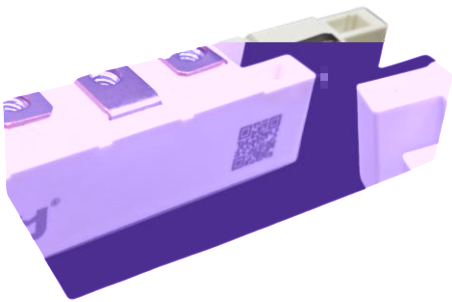


0 1



6

6		
°C		



6	)			
	°C			



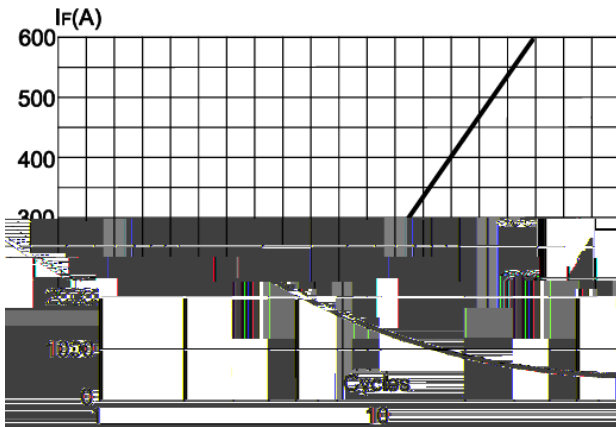
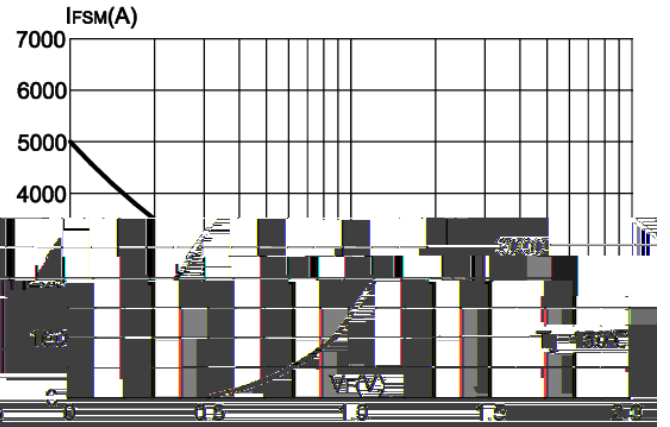
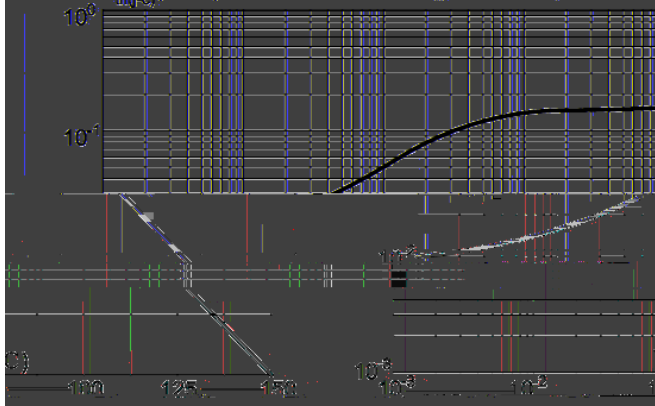
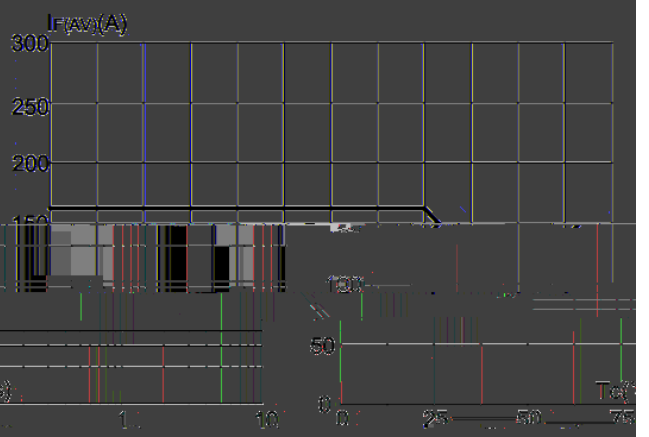
0 1

)

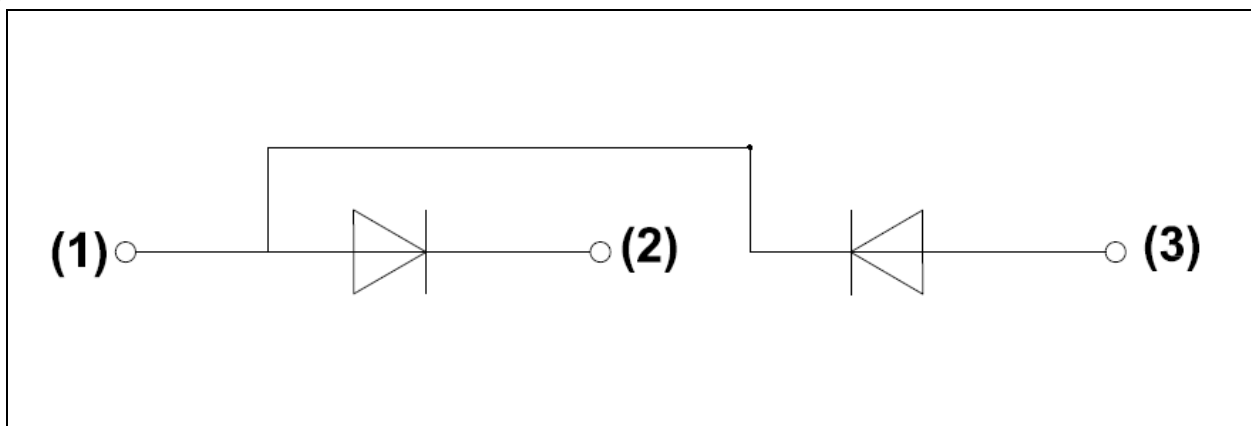
6						
	°C					
	°C					

°C

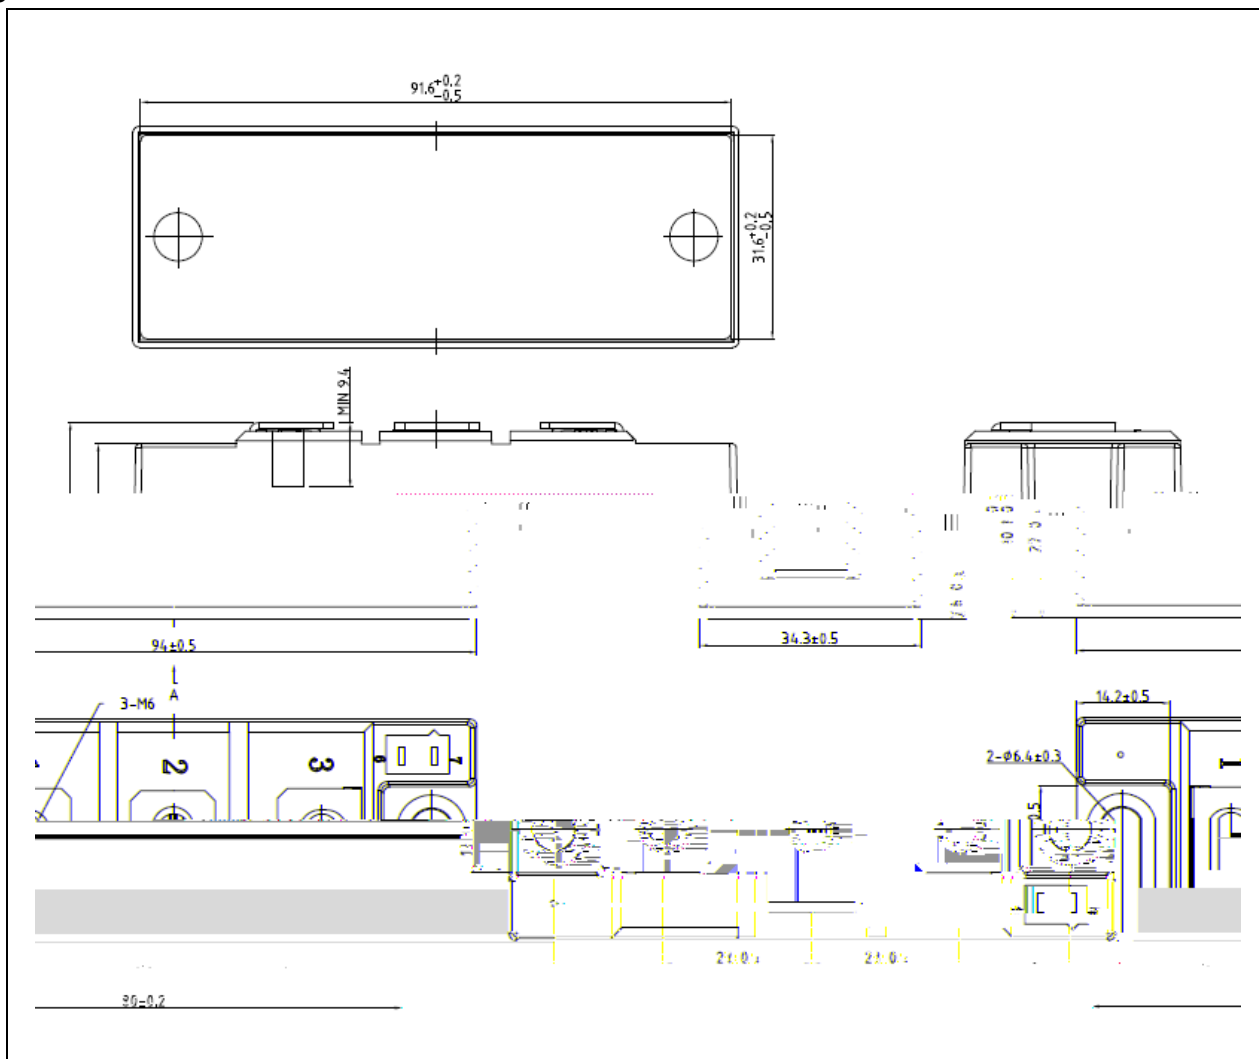
)

FIG.1: Forward characteristics(per diode)

FIG.2: Peak on-state surge current

FIG.4: Maximum transient thermal impedance
 $R_{\theta JA}$ (°C/W) Junction-to-case(per diode)

FIG.3: Forward current vs. case temperature


)



6





0

1