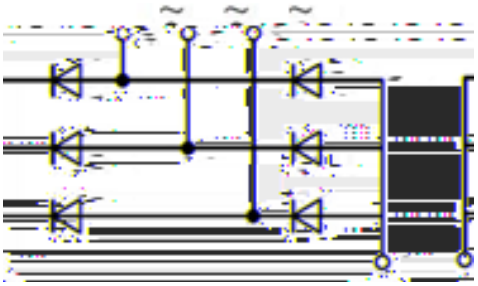

	℃			
	℃			
				℃

	℃					
	℃					
	℃					
	℃					

FIG.1: Forward characteristics(per diode)

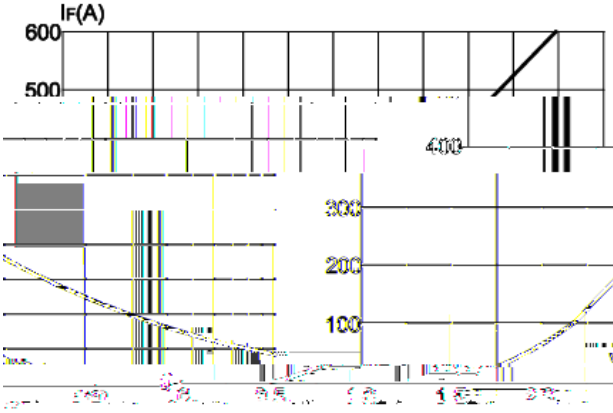

FIG.2: Peak on-state surge current

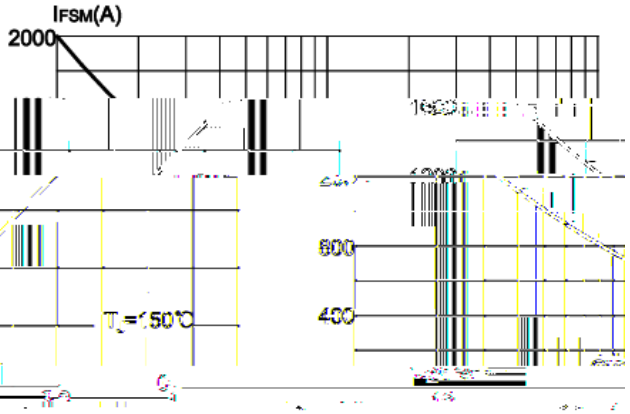

FIG.3: Forward current vs. case temperature

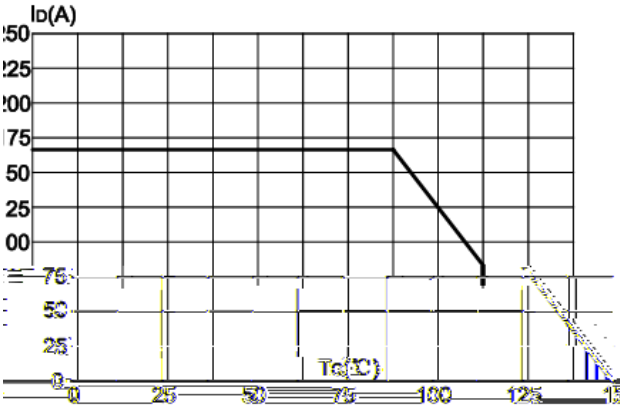
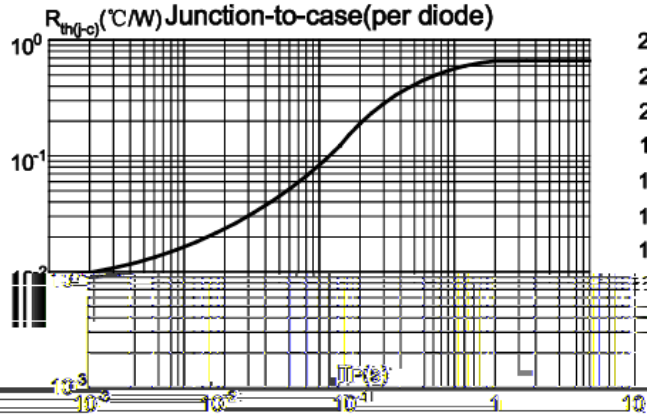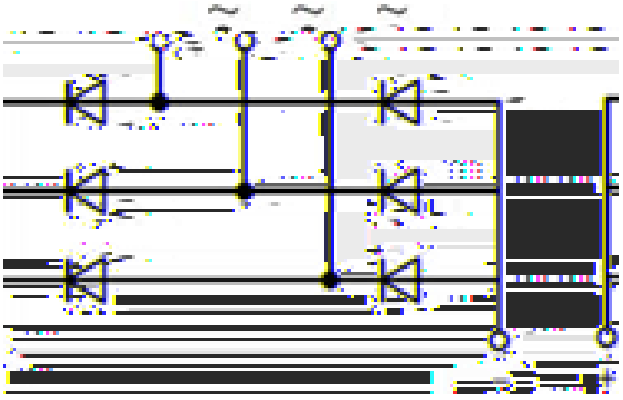
FIG.4: Maximum transient thermal impedance Junction-to-case(per diode)