

	°C			
	°C			
□		□		
				°C



	°C					
	°C					
	°C					
	°C					

☐	☐				

FIG.1: Forward characteristics(per diode)


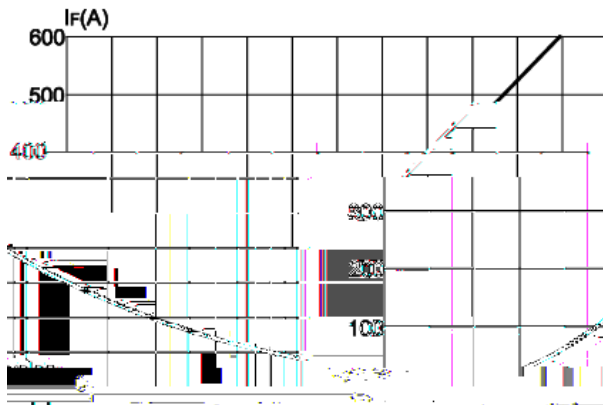


FIG.2: Peak on-state surge current

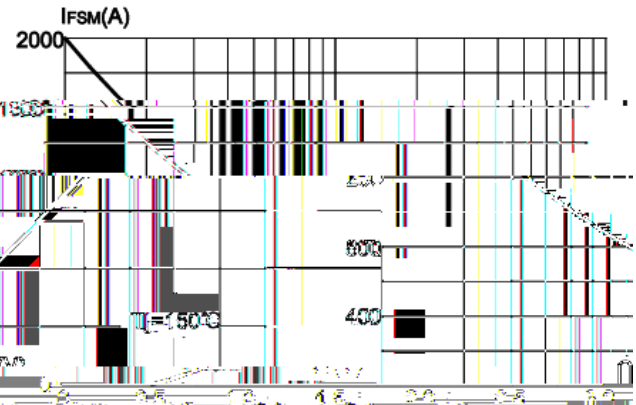

**Maximum transient thermal impedance
ZθJA(junction-to-case)(per diode)**

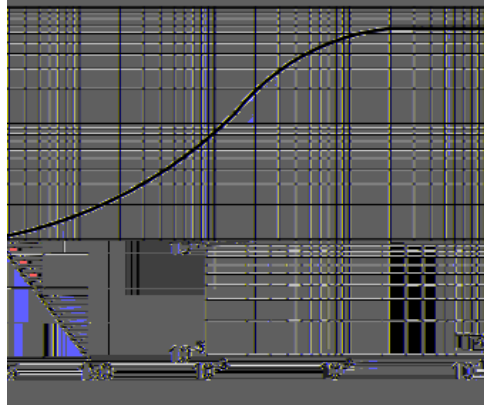


FIG.3: Forward current vs. case temperature


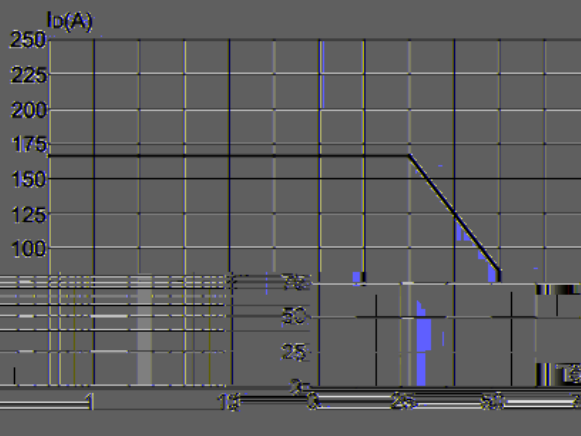


FIG.4:



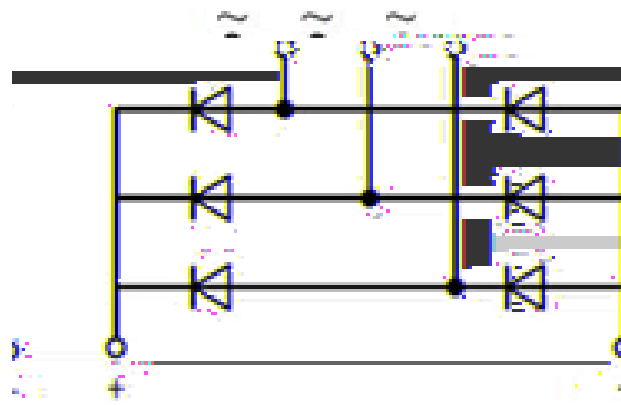

□ □ □

□ □ □

□ □ □

□



□ □ □

□ □ □

□ □ □