



)

H CD	CTID

D ST DR

CTBS2 TL L X

L DSD	5 KTD	M\$
°C		

OOHBB SH MR



AR KTD WIL TL 1 SHFR

L DSD	MCISH MR	2XL A K	5 KDR	M\$
	°C			



)

WBS HB K G BSD HRSBR

L DSD	MCISH MR	2XL A K	5 KTR			M\$
			HM	XO	W	
	°C					
	°C					
	°C					
						Ω

GD L K G BSD HRSBR

L DSD	MCISH MR	2XL A K	5 KTR			M\$
			HM	XO	W	

. CD HMF (ME L SH M

DUHBD	JHMF	BJ FD	6 DHFGS	(MVD W	D S M




)


XOHB K IOBSHB K GD L K G BSD HRSHER

FIG 1: Forward characteristics(per diode)


FIG 2: Peak on-state surge current

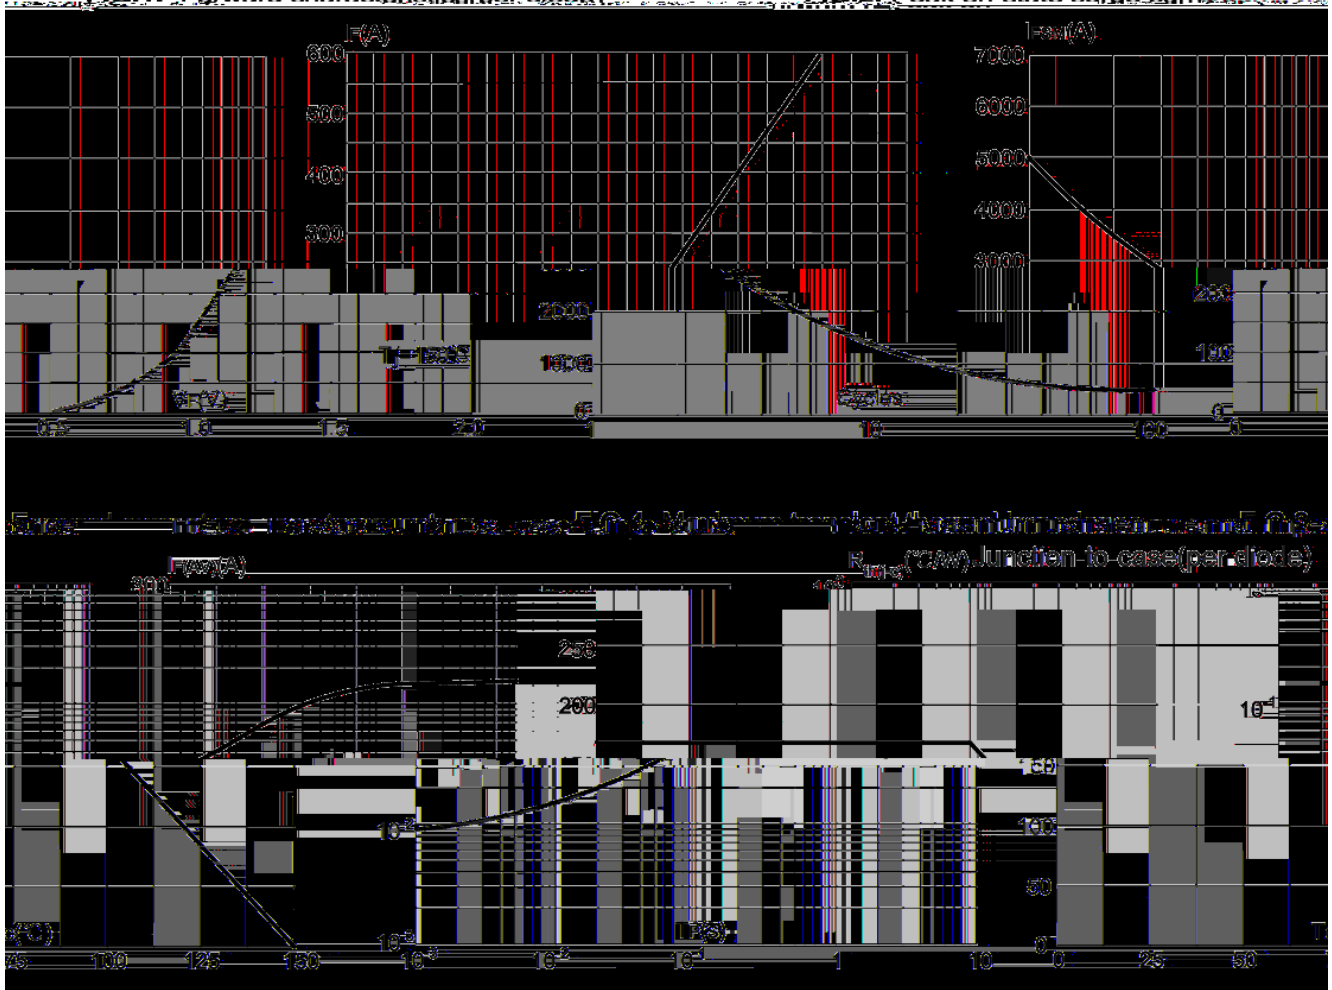

HBTIS HF L

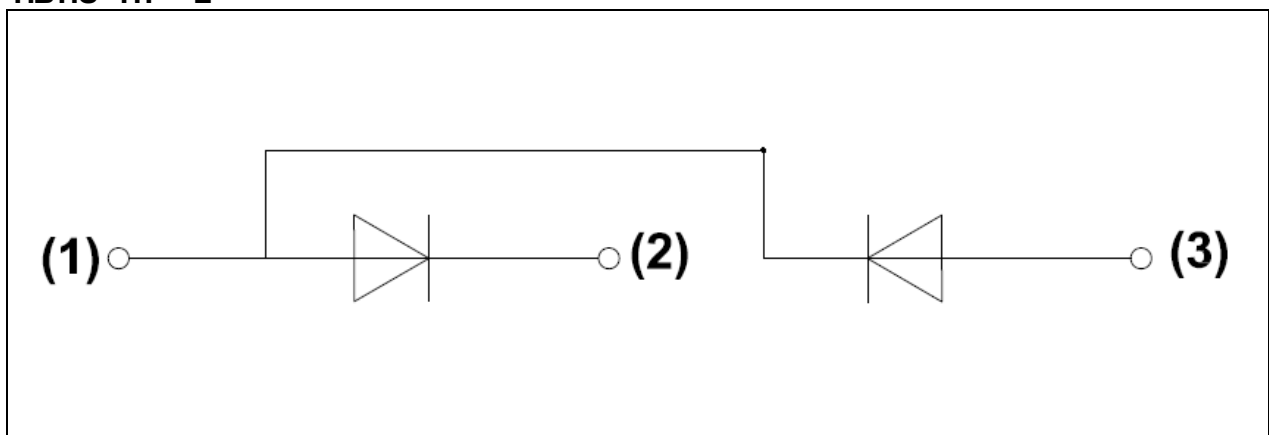

BJ FD. TSMDR L L

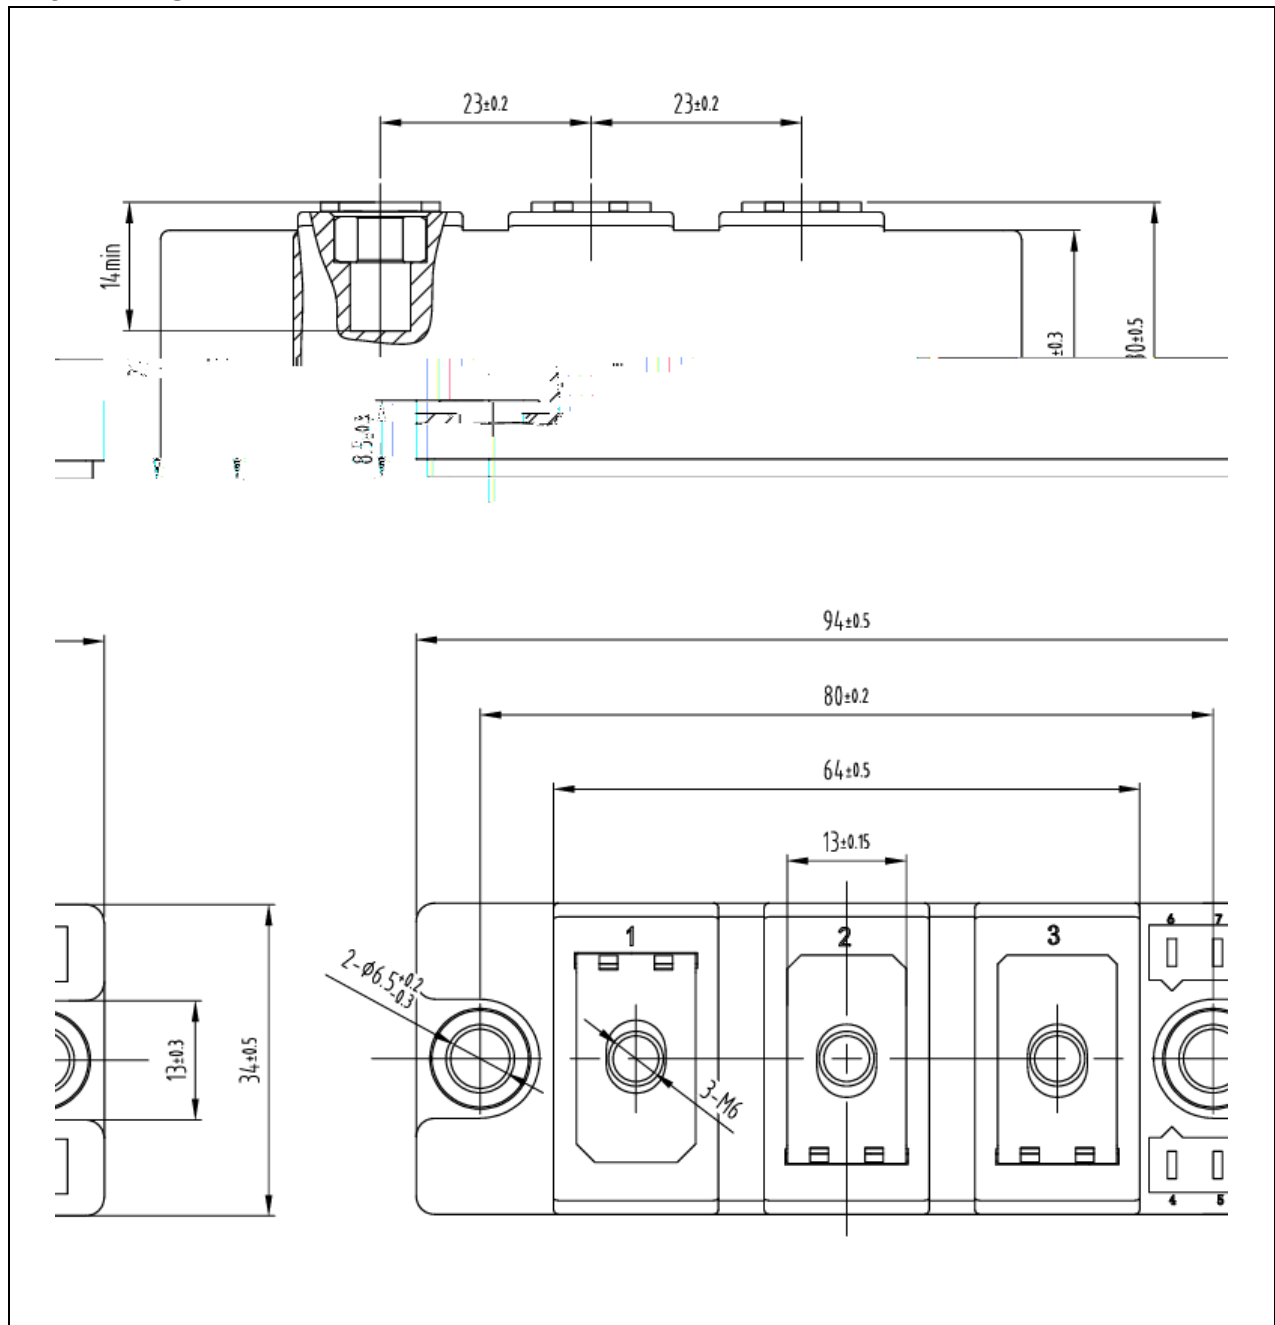



)

