



0


QJK UJ R

KG XY

6XUJ I S S GX

6GXS K KX	GR K	TO
°C		

VVRDG QTY

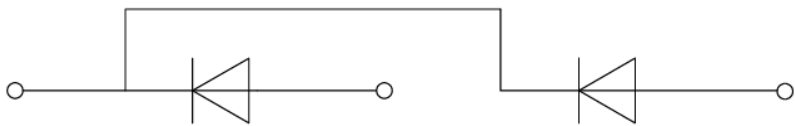

HYUR K G S S G QMY

6GXS K KX	) UTJQTY	S HUR	GR KY	TO
	°C			



0


PKI XDGR) GGE KXY ØY

6GGS K KX	) UTJØØTY	S HUR	GR KY			TO
			σ	V	G	


V0GR R01 X0GR K0S GR) G0G K0Y 0Y

FIG.1: Forward characteristics(per diode)


FIG.2: Peak on-state surge current

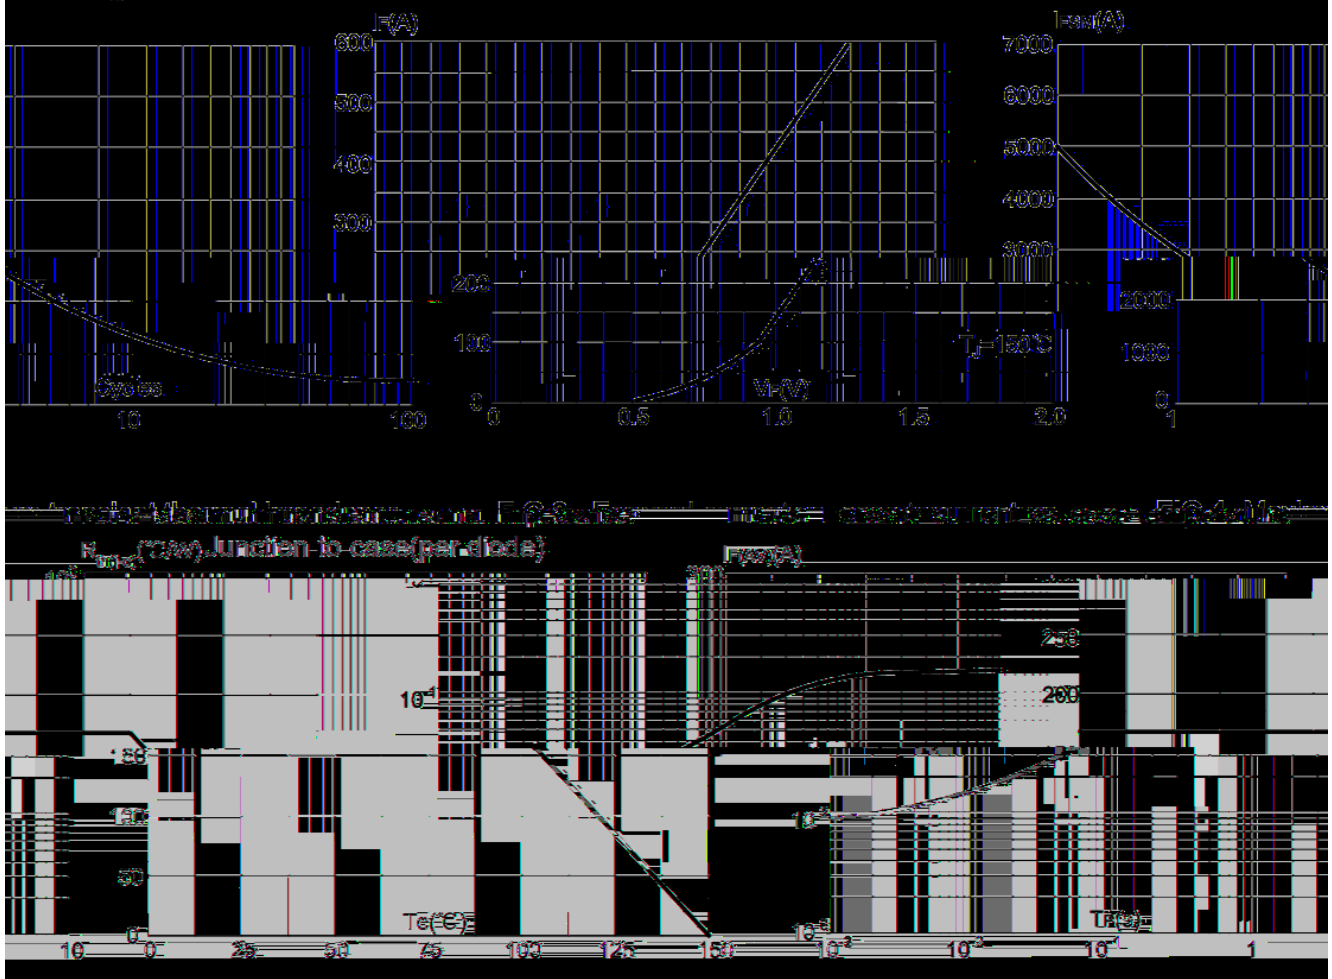

) α 0 00VGS

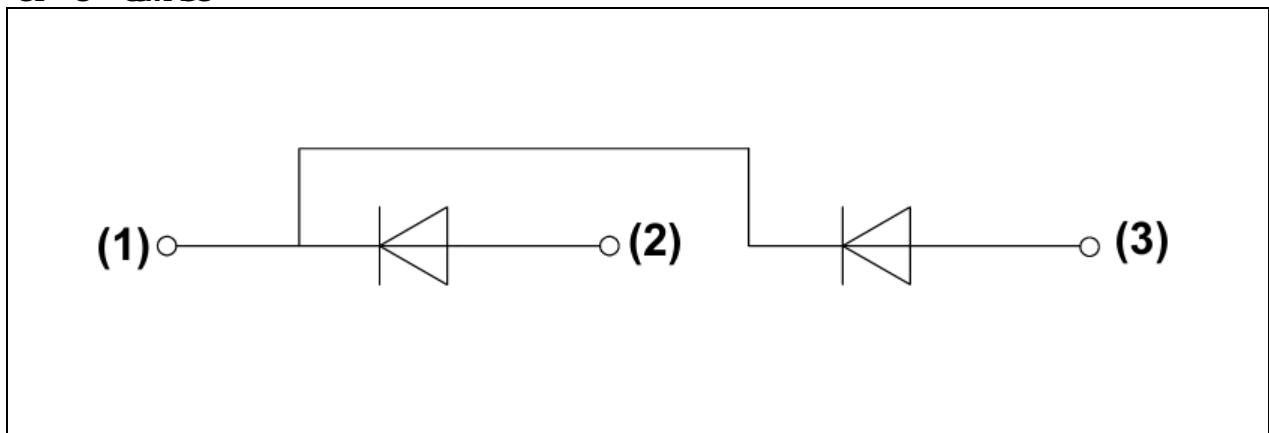

6G GVK 5 ROKY S S

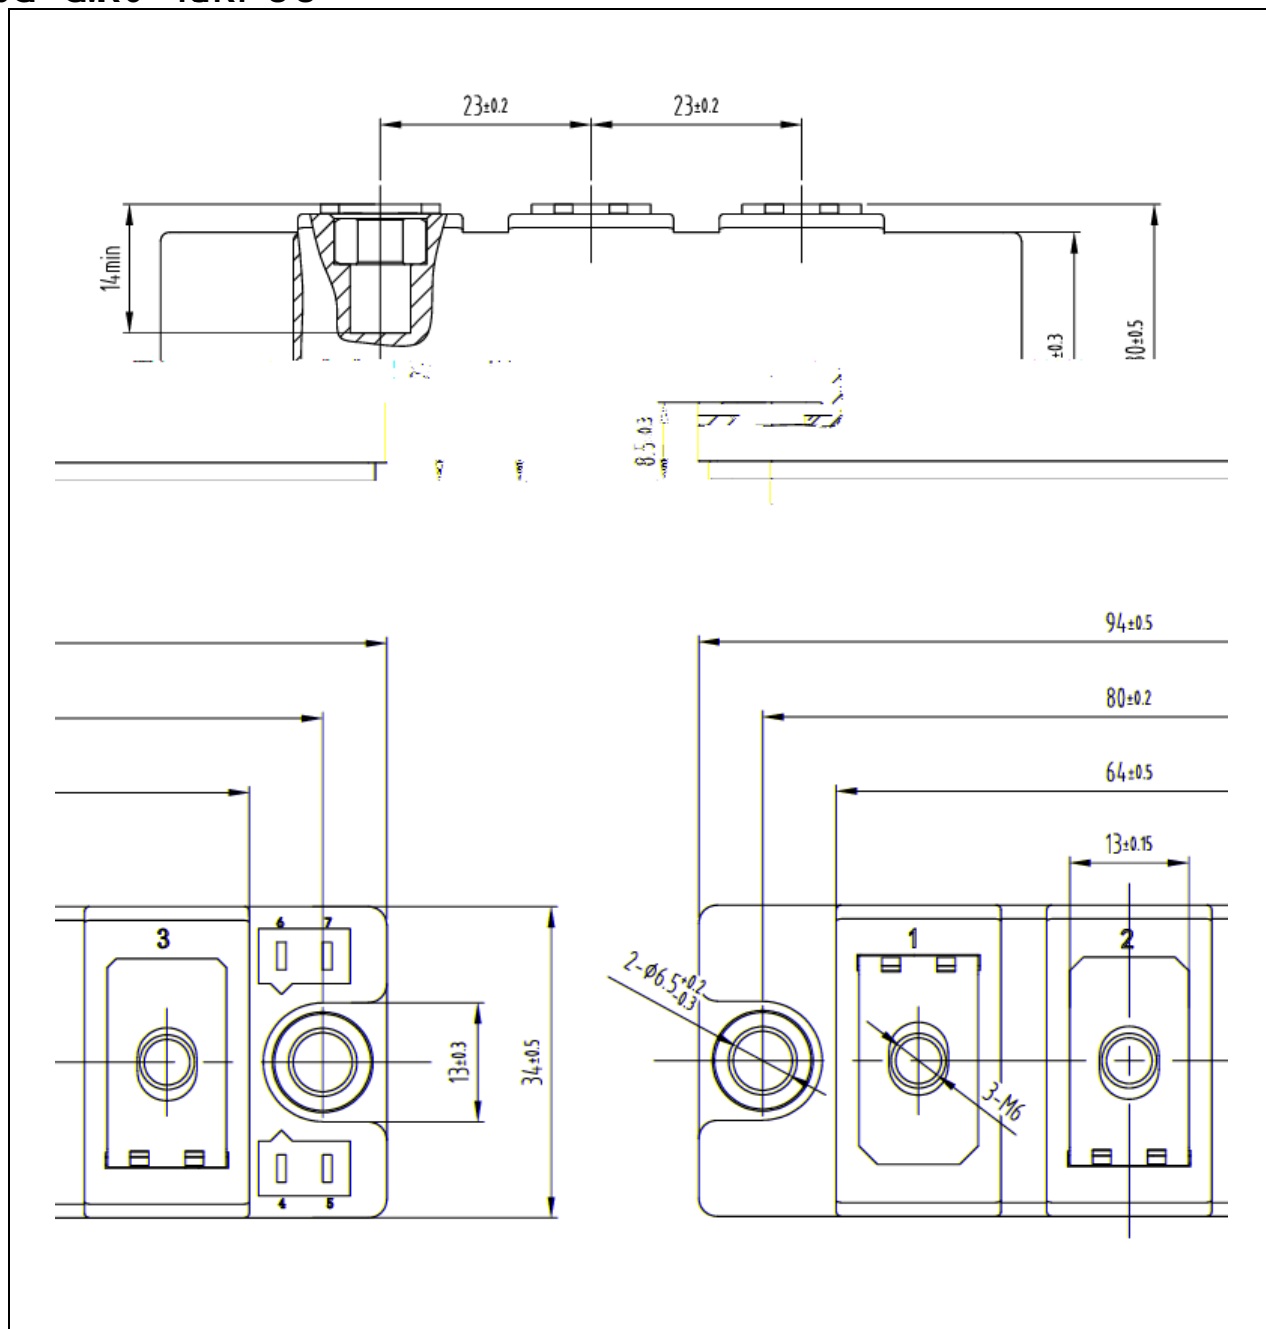



0

