



”

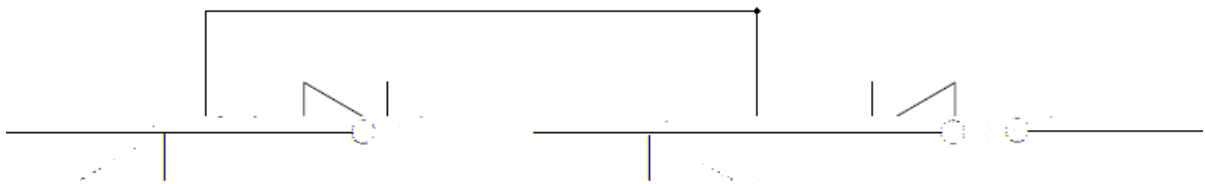
AG G MD

LMJ K

(JG M L MEE J

(J E L J	. DM	FA
°C		

HHDA LGFK



KGDL Æ ME LÆ K

(J E L J	GF AGFK	E GD	. DM K	FA
	°C			



''

□ D LJA D J L JALAK

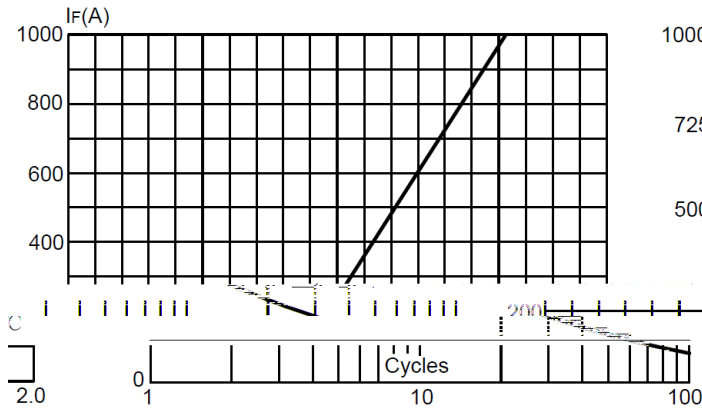
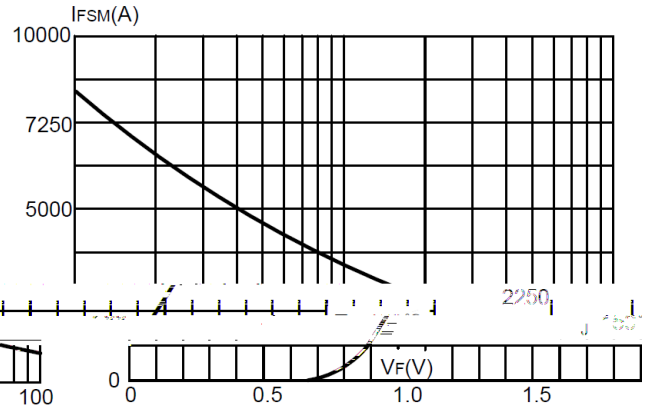
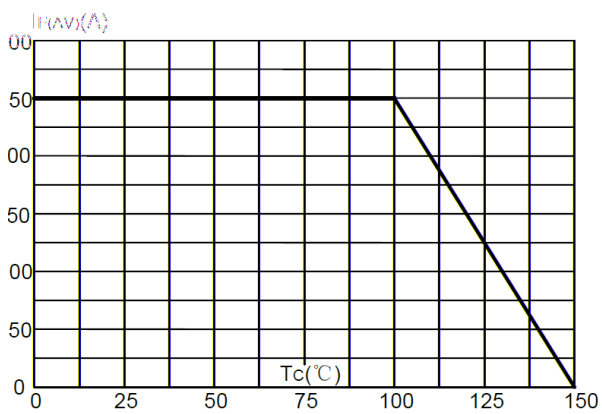
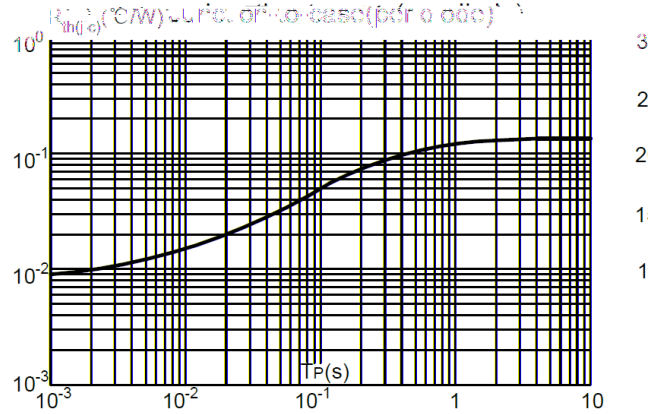
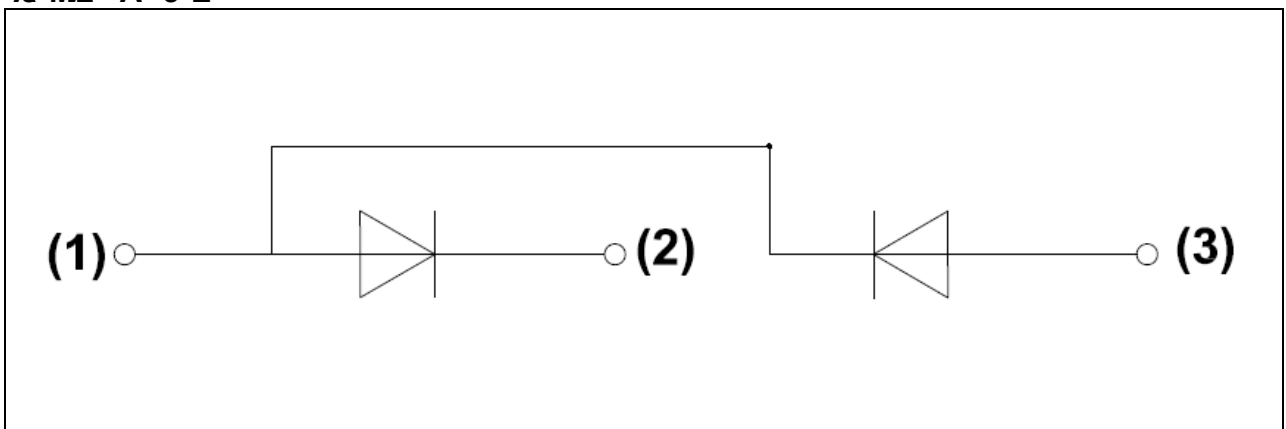
(J E L J	GF AGFK	E GD	. DM K			FA
			Æ	H		
	°C					
	°C					
	°C					
						Ω

JE D J L JALAK

(J E L J	GF AGFK	E GD	. DM K			FA
			Æ	H		

J JÆ IFGE LÆF

A	JCÆ	(C	A L	IFF J G	(J JGF

**HA D D LJA D JE D J L JAK****FIG.1: Forward characteristics(per diode)****FIG.2: Peak on-state surge current****FIG.3: Forward current vs. case temperature****FIG.4: Maximum transient thermal impedance****A MA A J E**



”

