



25 □ 5)

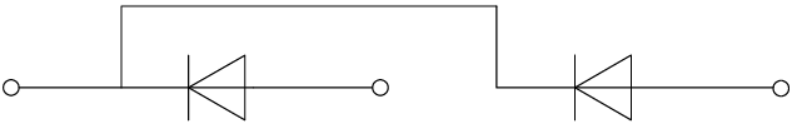
LM5 L M

. M M

8 L K I

8I I MM	I M	
°C		

) K



) J M5I I

8I I MM	L	J	I M	
	°C			



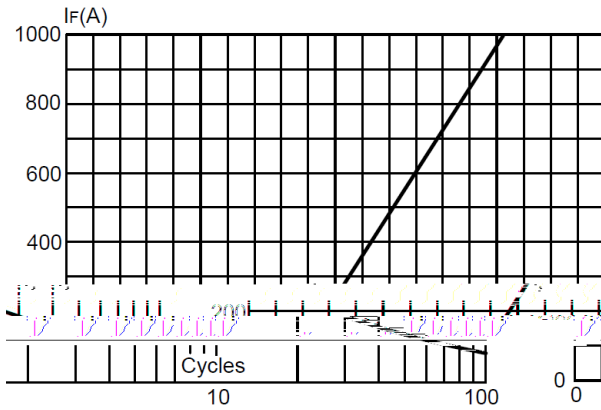
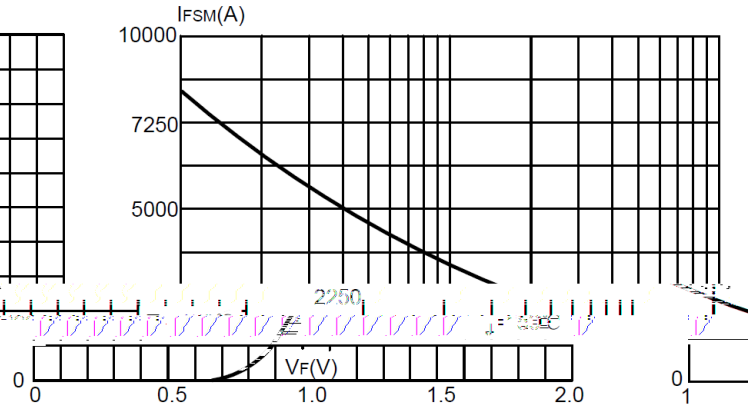
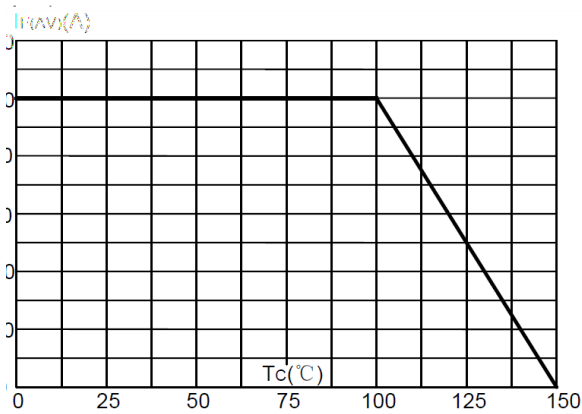
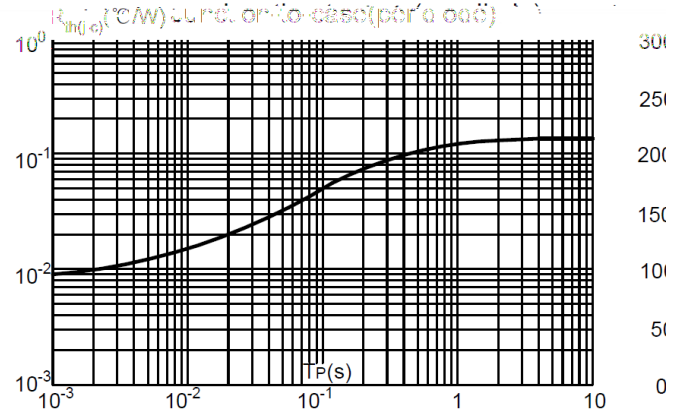
MK K I I KM K

8I I MM	L	J	I M			
			5		5I	
	°C					
	°C					
	°C					
						Ω

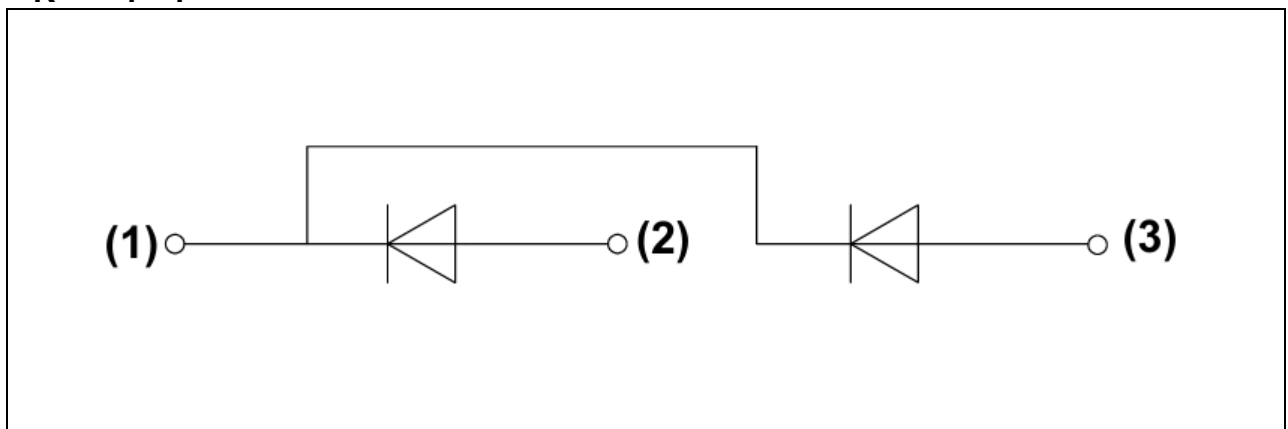
M I I I KM K

8I I MM	L	J	I M			
			5		5I	

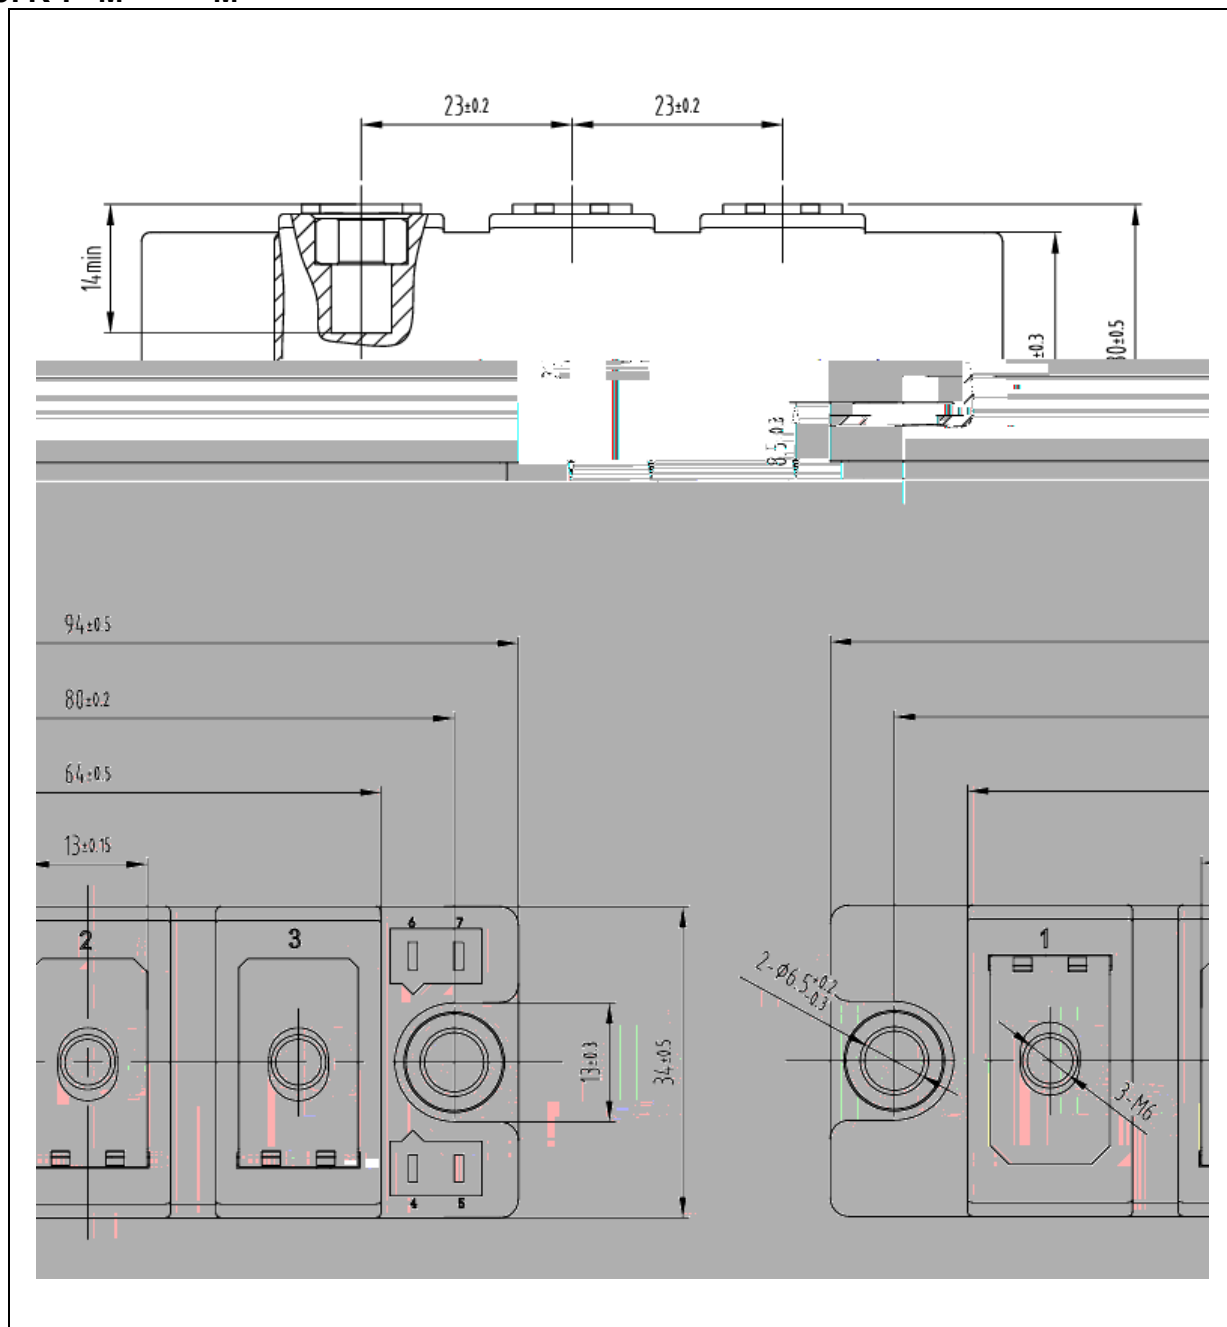
K M K M I I KM K

FIG.1: Forward characteristics(per diode)

FIG.2: Peak on-state surge current

FIG.3: Forward current vs. case temperature

FIG.4: Maximum transient thermal impedance


K I I



8IK1 M M





25 ☐ 5)