




MM8 I M MK M L M5 L M

. M M

8 L K I

8I I MM	I M	

) K

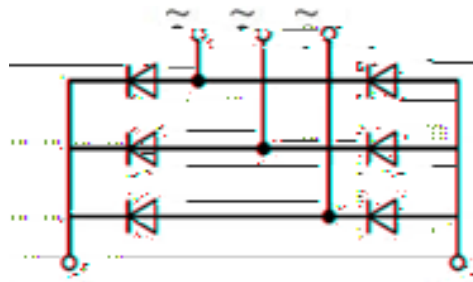

) J M5I I

8I I MM	L	J	I M	
	°C			
	°C			
				°C



MK K I I KM K

8I I MM	L	J	I M			
			5		5I	
	°C					
	°C					
	°C					
	°C					

M I I I KM K

8I I MM	L	J	I M			
			5		5I	

LM 1 I

M KM	5I	8I K I M	M	1 M	8M I

K MK K M I I KM K

FIG.1: Forward characteristics(per diode)

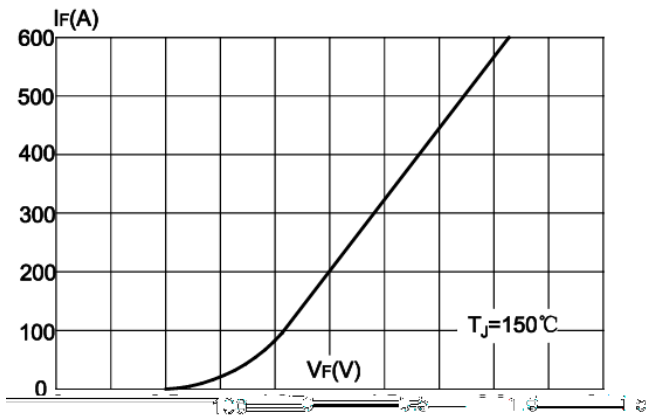


FIG.2: Peak on-state surge current

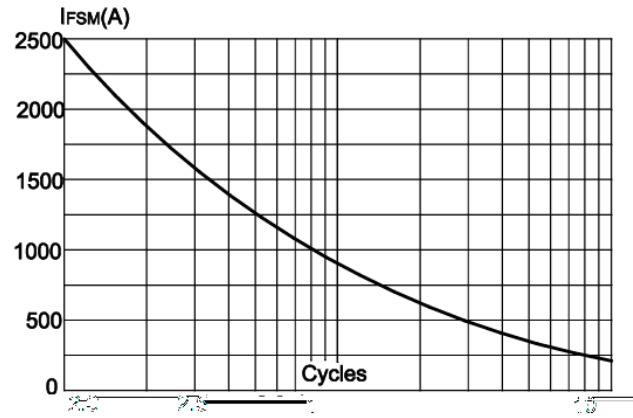


FIG 3: Forward current vs. case temperature



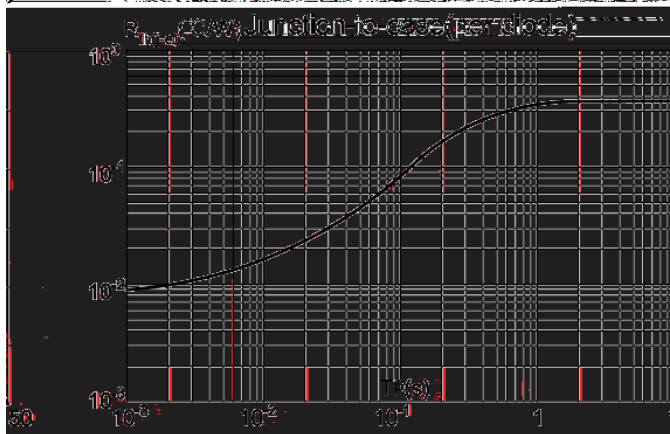


FIG 4: Maximum transient thermal impedance

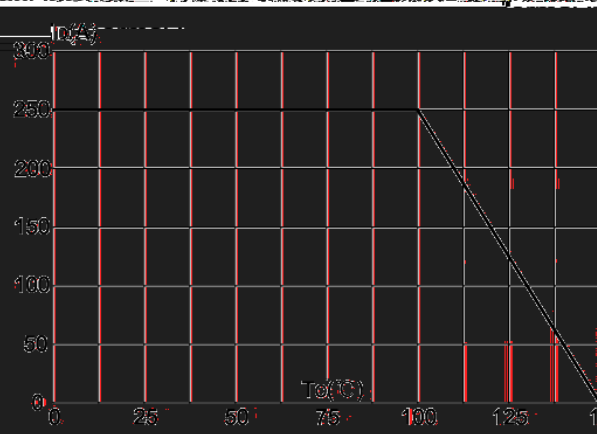

K I I

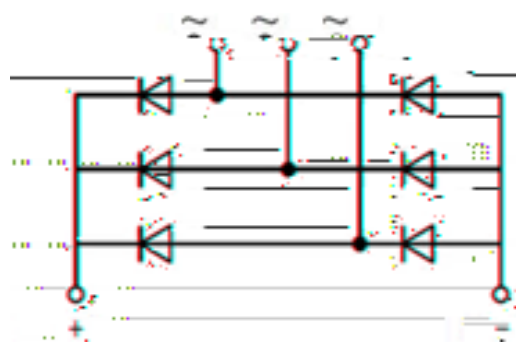

81 K I M M

