


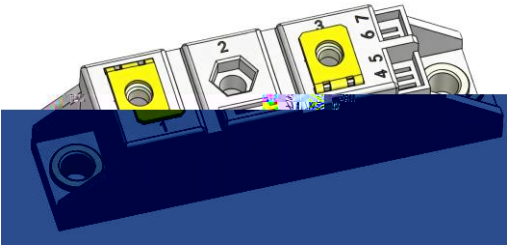


BE (C (L)

E

H K

H		M
°C		



E J

H		K		M
	°C			



H		K				M
			E &	L &	E &	
	°C					
	°C					
	°C					
						Ω

L

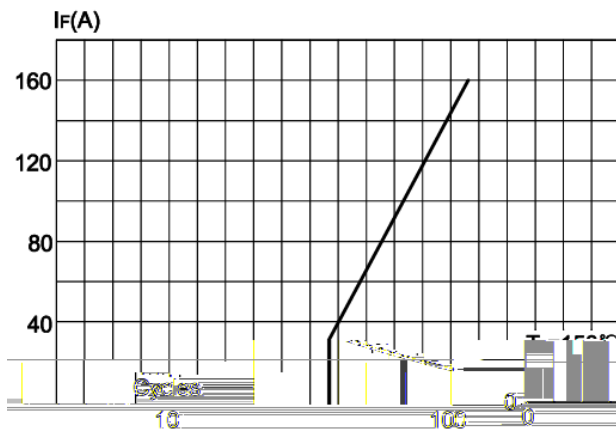
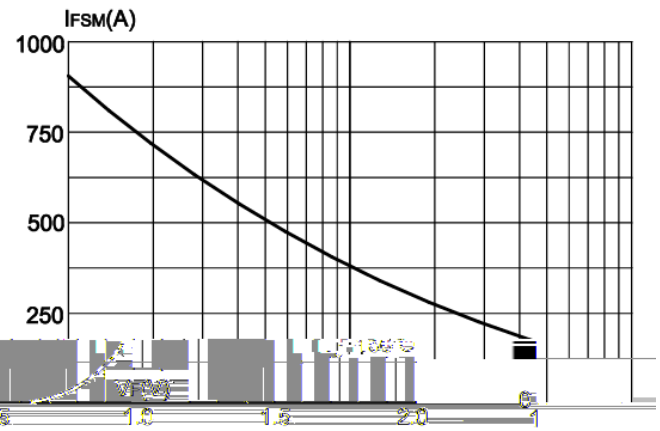
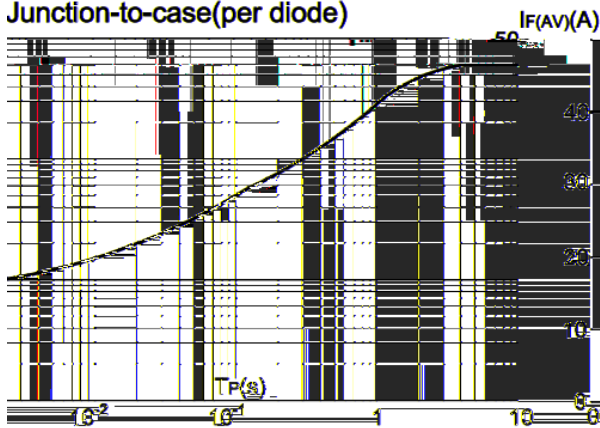
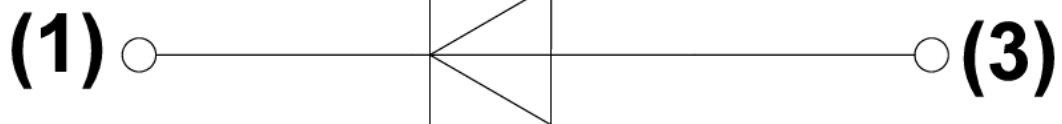
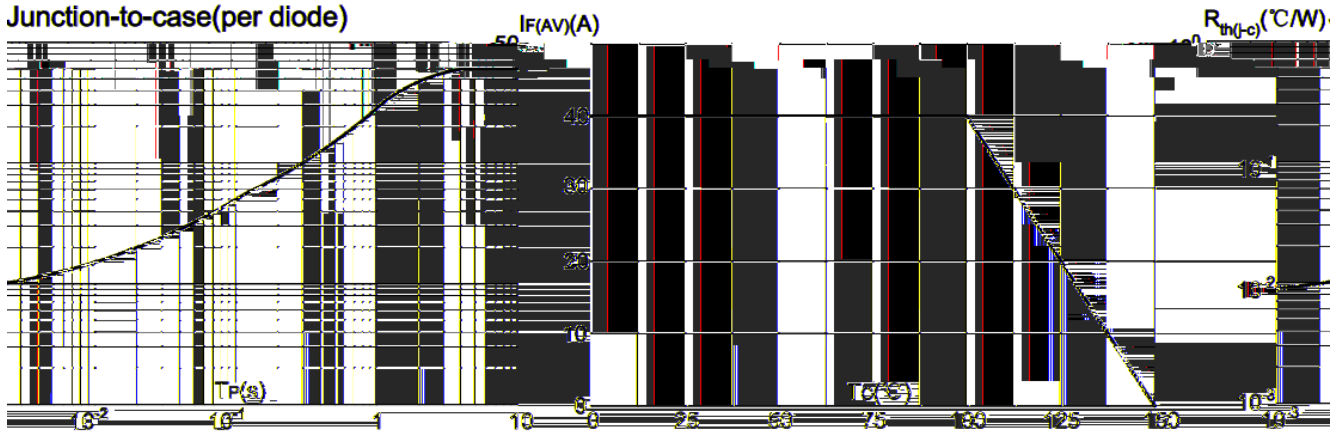
H		K				M
			E &	L &	E &	

G A

	E	H	O	A	H

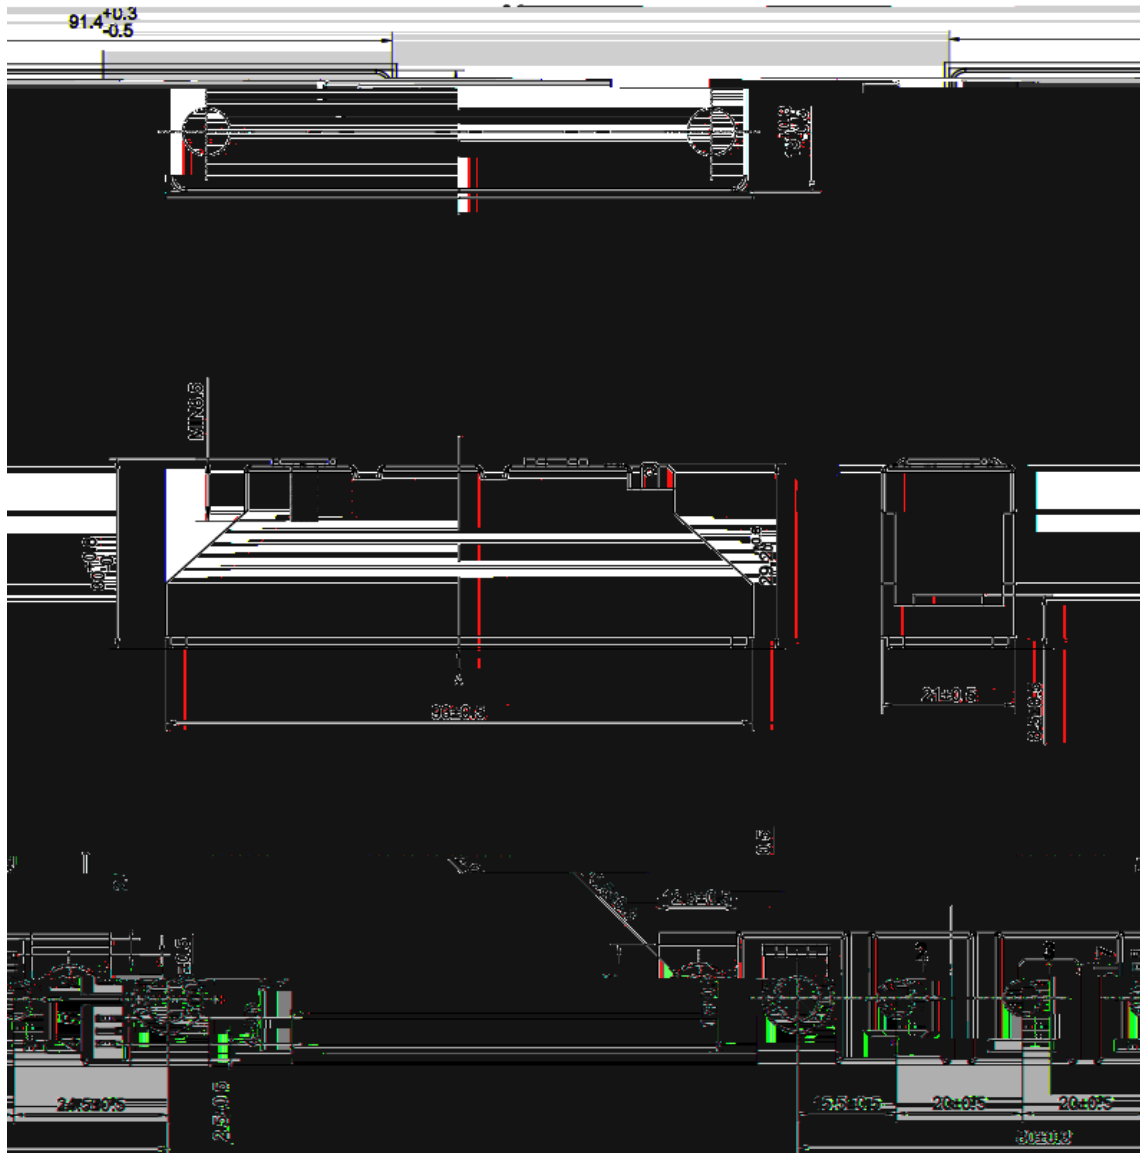
L

L

FIG.1: Forward characteristics(per diode)

FIG.2: Peak on-state surge current

FIG.3: Forward current vs. case temperature

FIG.4: Maximum transient thermal impedance


H G !

A视图





BE (C (L)

