



°C		

	°C			



	°C					
	°C					
	°C					
						Ω

FIG.1: Forward characteristics(per diode)

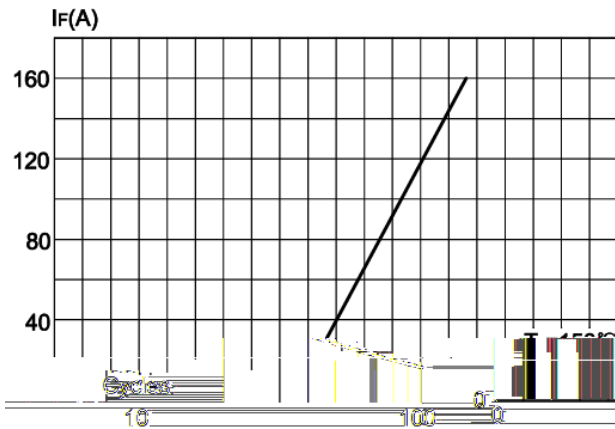


FIG.2: Peak on-state surge current

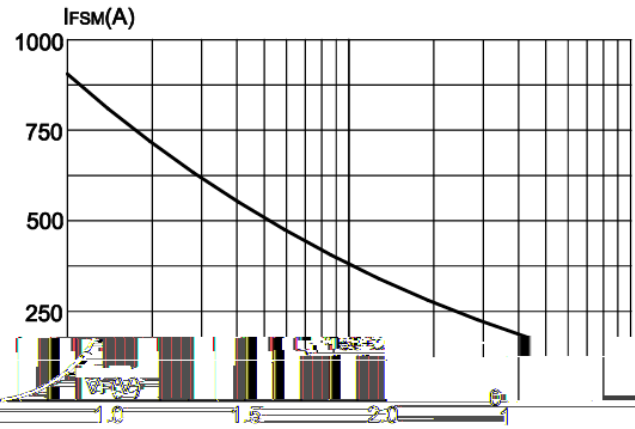


FIG.3: Forward current vs. case temperature

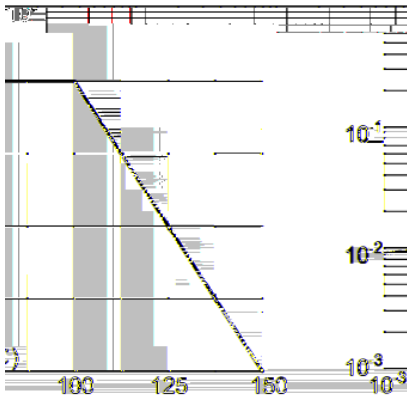


FIG.3: Forward current vs. case temperature

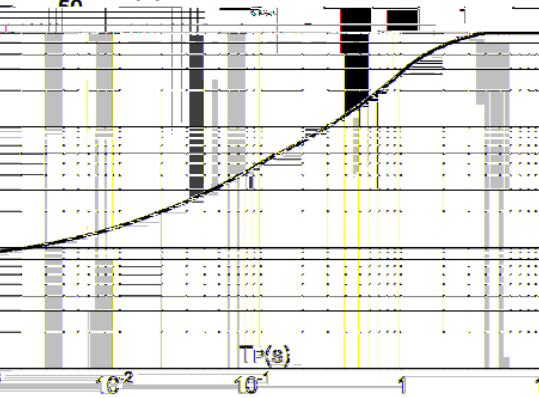


FIG.4: Maximum thermal impedance

