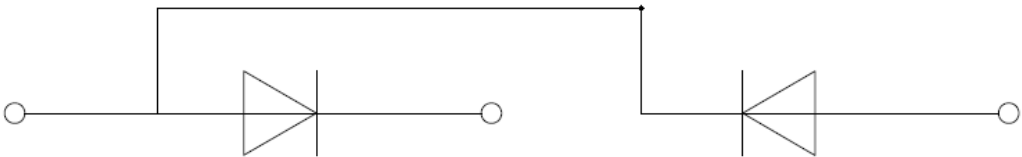




CF) D) M

F

I	L	
I	O	
°C		



F	K			
I		L	O	
	°C			



I		L	O			
			F	M	F	
	°C					
	°C					
	°C					
						Ω

M

I		L	O			
			F	M	F	

H

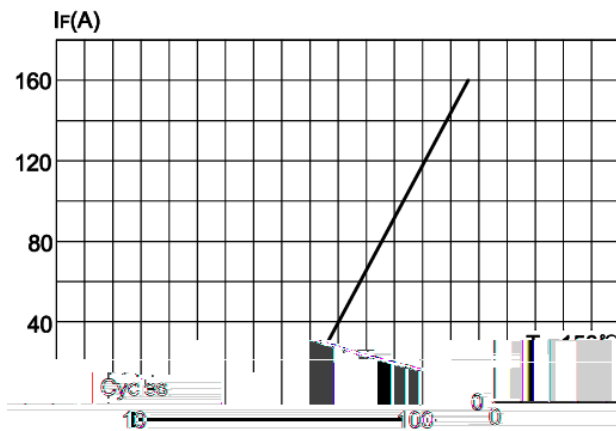
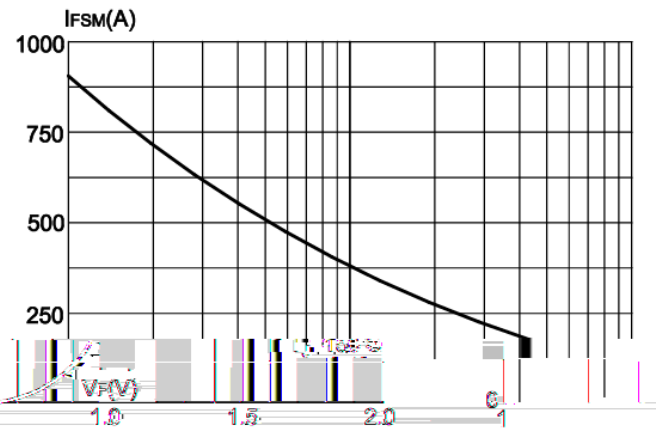
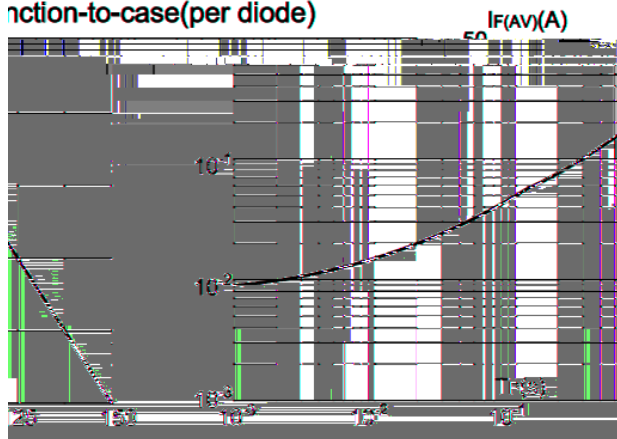
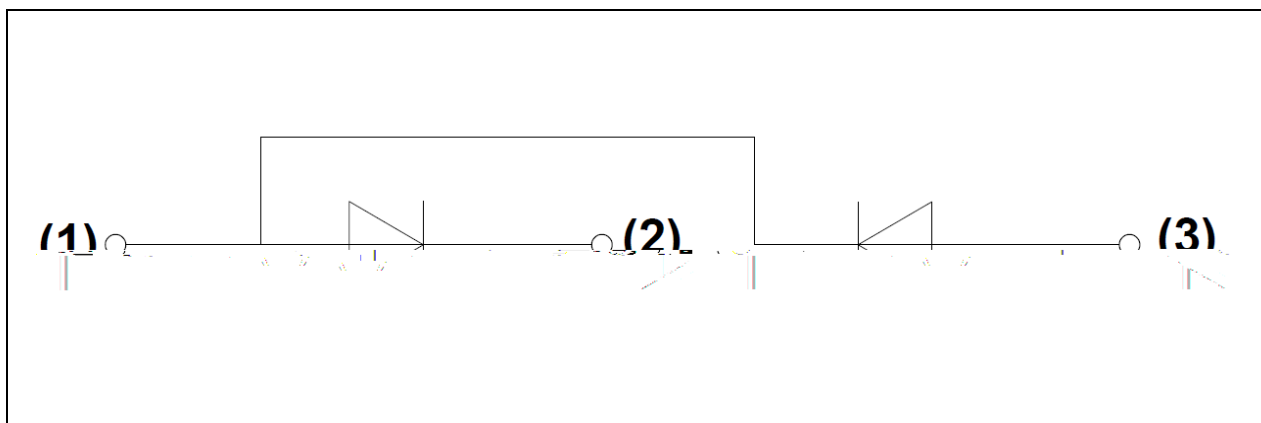
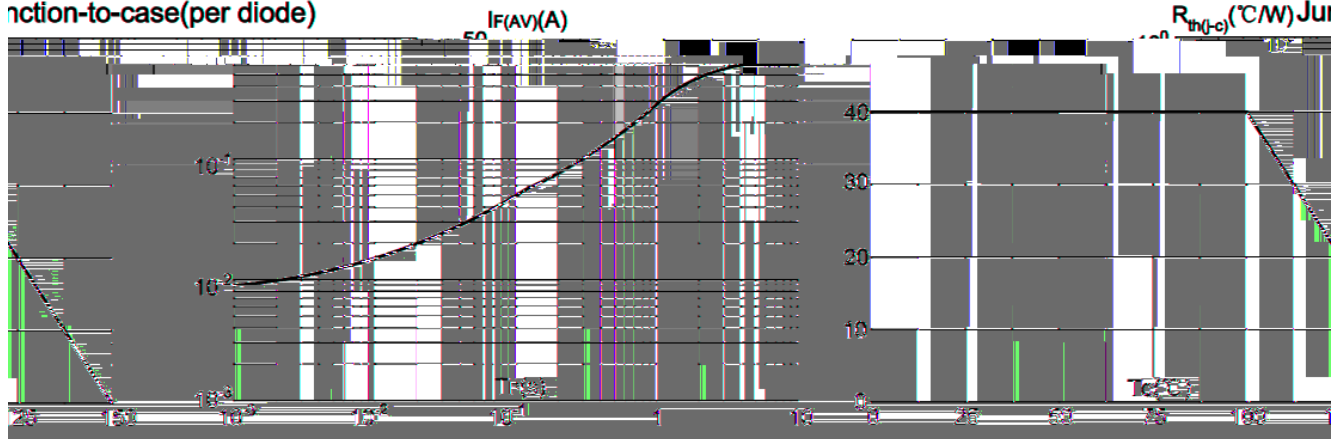
B

	F	I	P	B	I

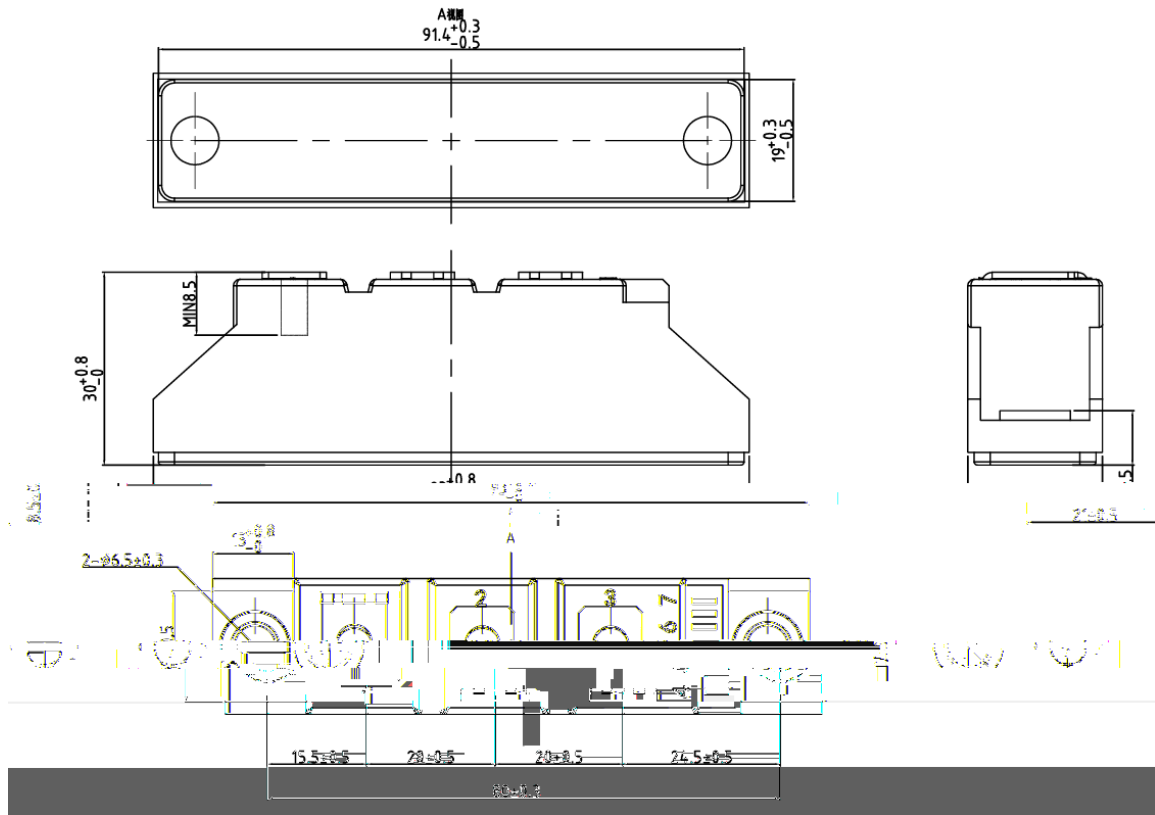


M

M

FIG.1: Forward characteristics(per diode)**FIG.2: Peak on-state surge current****FIG.3: Forward current vs. case temperature****FIG.4: Maximum thermal impedance**

I H ! "





CF) D) M

