



JMD40KE16T1A

Electrical Characteristics

Parameter	Conditions	Symbol	Values			Unit
			Min.	Typ.	Max.	
	°C					
	°C					
	°C					
						Ω

Thermal Characteristics

Parameter	Conditions	Symbol	Values			Unit
			Min.	Typ.	Max.	

Ordering Information

Device	Marking	Package	Weight	Inner Box	Per Carton



Typical Electrical & Thermal Characteristics

FIG.1: Forward characteristics(per diode)


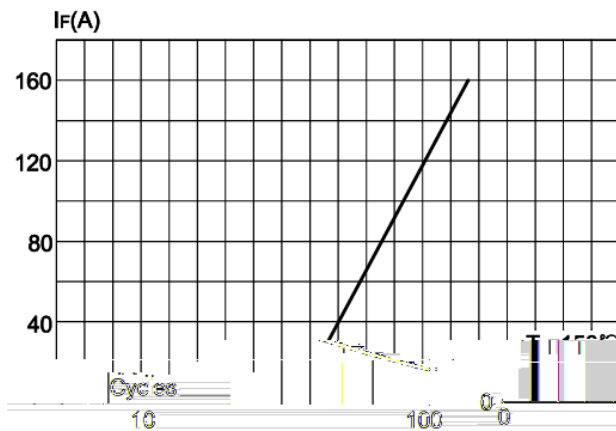


FIG.2: Peak on-state surge current

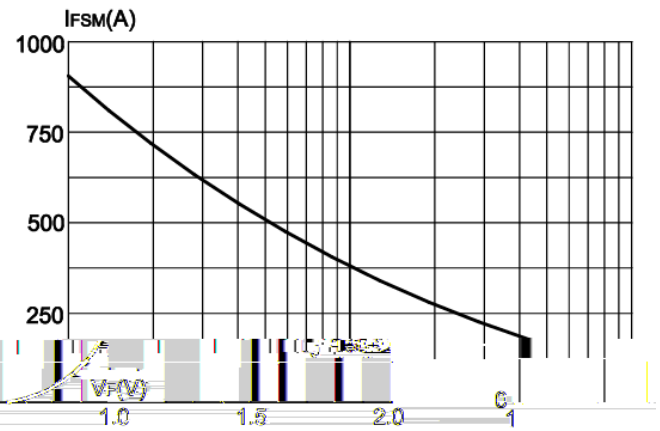

um transient thermal impedance
nction-to-case(per diode)

FIG.3: Forward current vs. case temperature



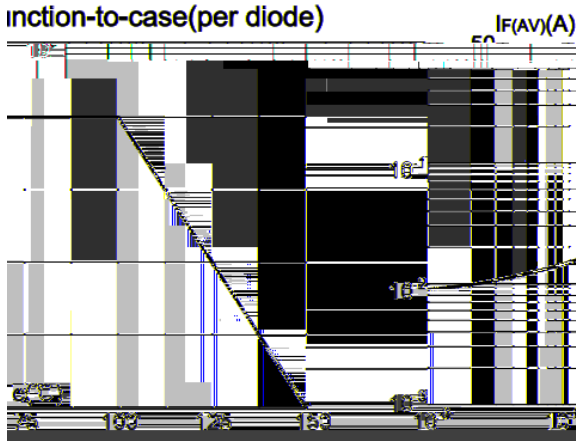


FIG.4: Maxim

$R_{th(j-c)}$ (°C/W) Ju

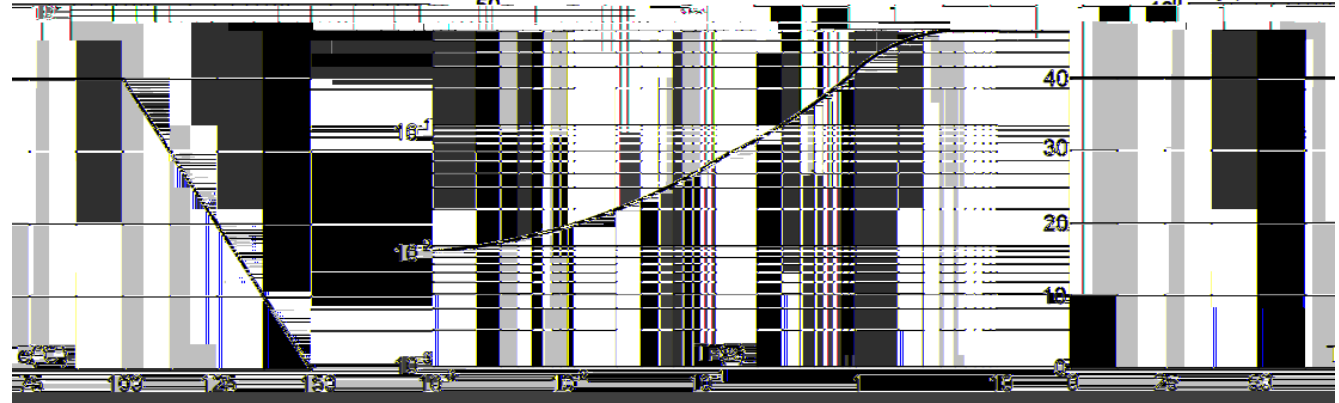


Circuit Diagram

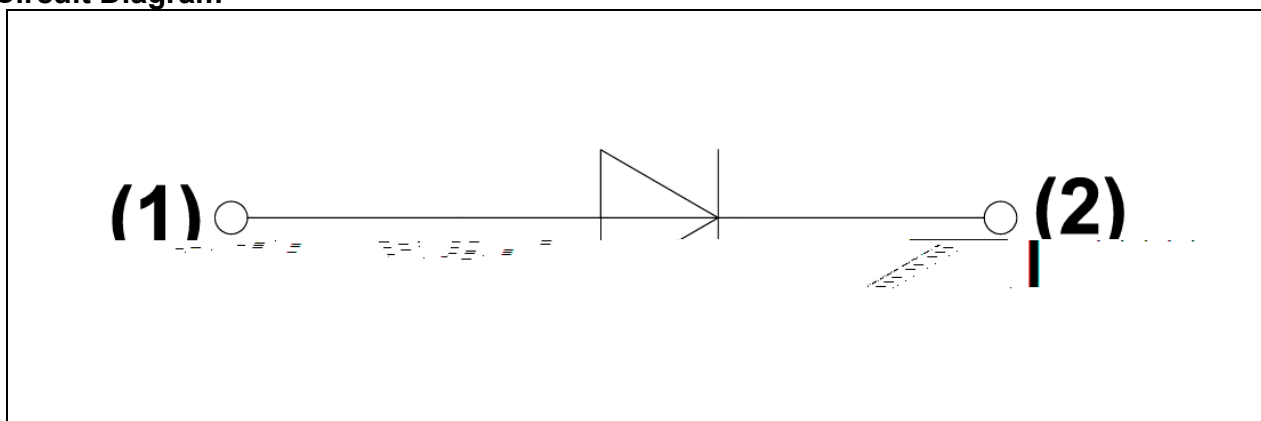



JMD40KE16T1A

Package Outlines (mm)

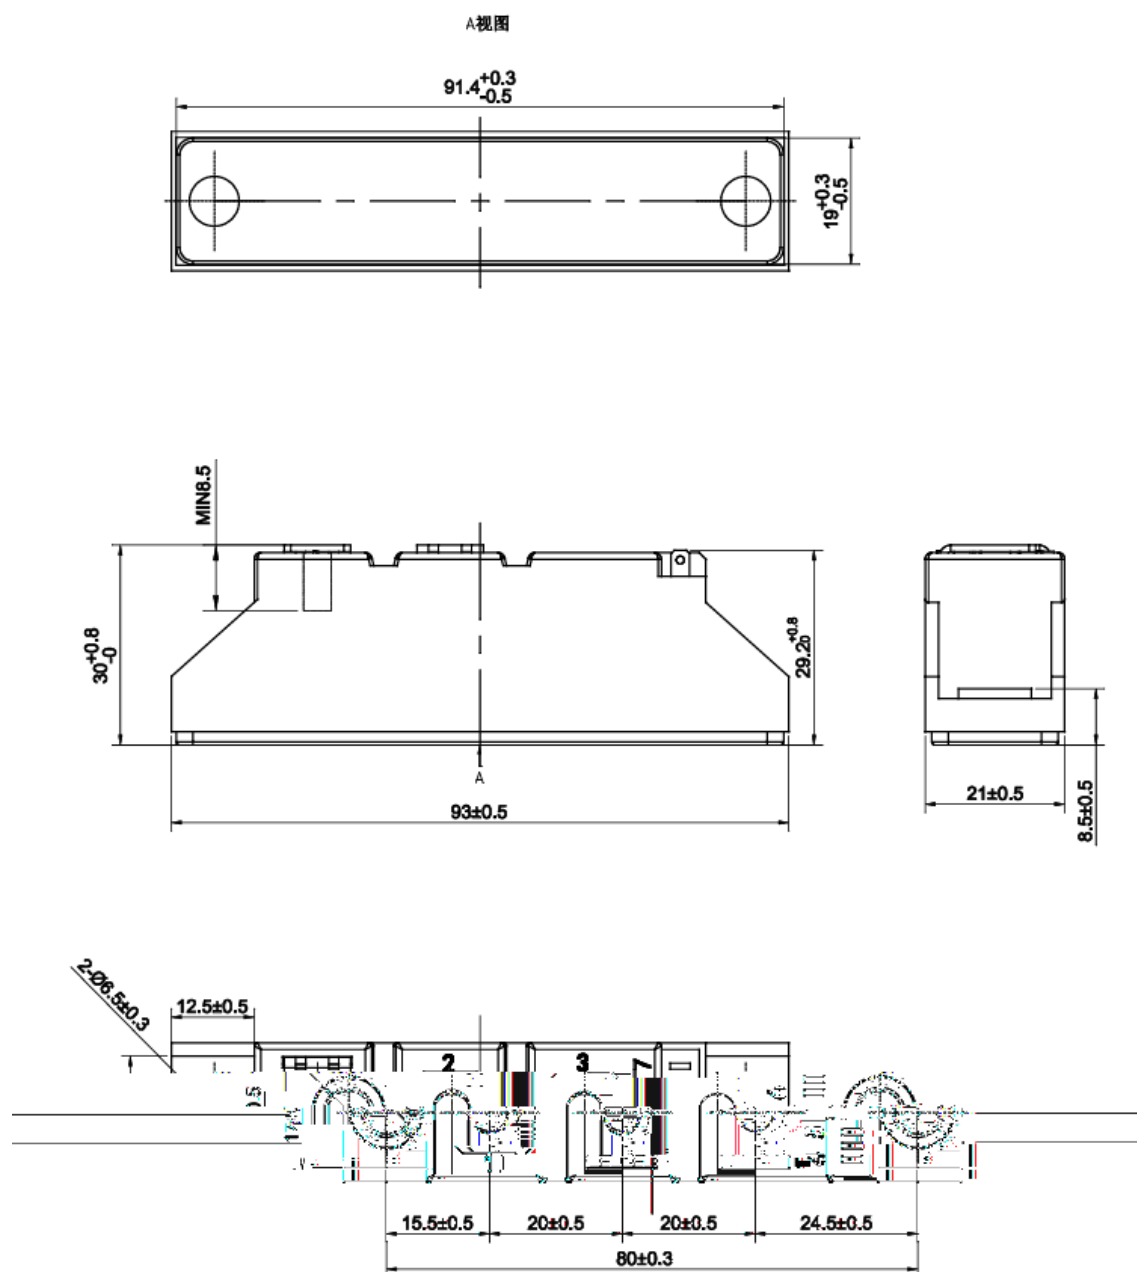



JMD40KE16T1A

