





°C		



	°C			

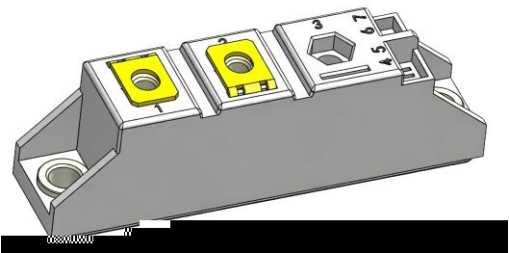

	°C					
	°C					
	°C					
						Ω

FIG.1: Forward characteristics(per diode)


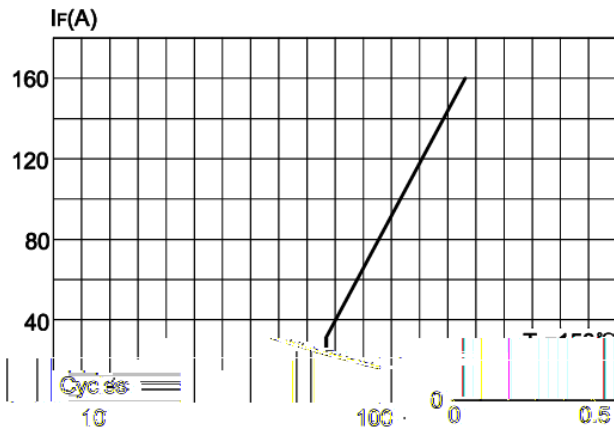




FIG.2: Peak on-state surge current

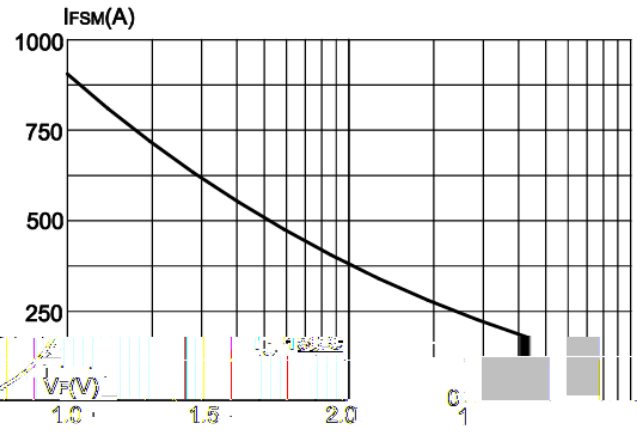

transient thermal impedance on-to-case(per diode)

FIG.3: Forward current vs. case temperature

FIG.4: Maximum $R_{th(j-c)}$ Junction

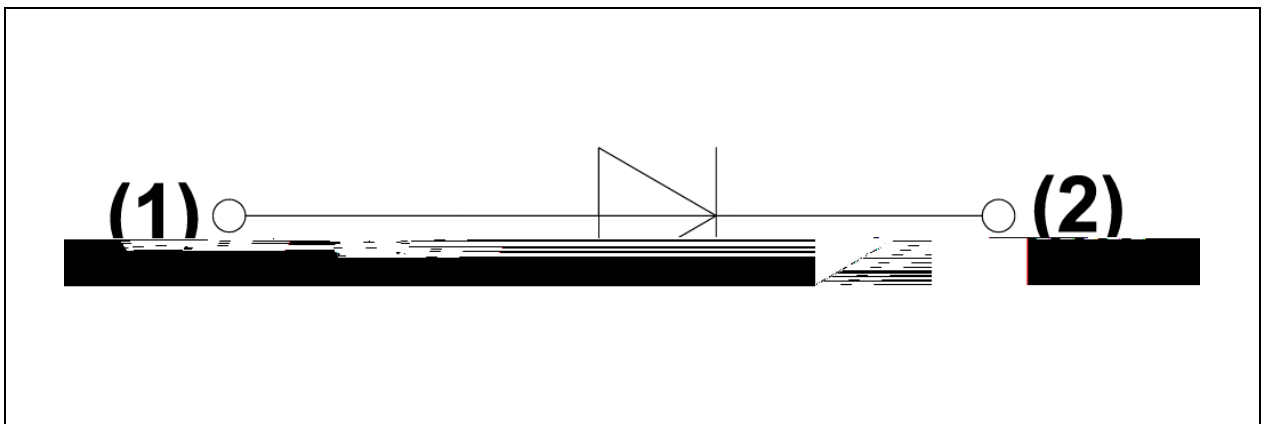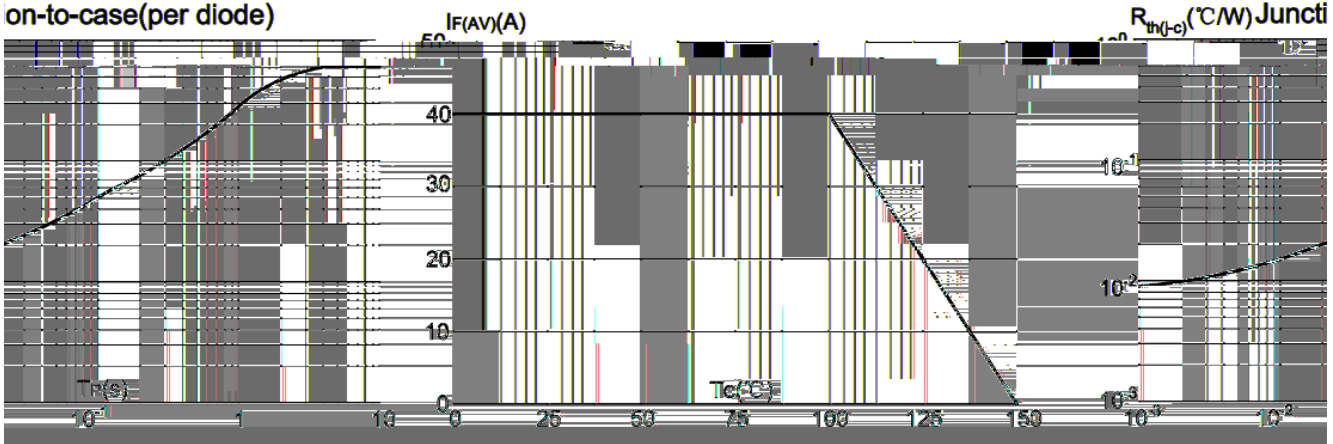

A视图

