





	°C					
	°C					
	°C					
						Ω



FIG.1 Forward characteristics (per diode)

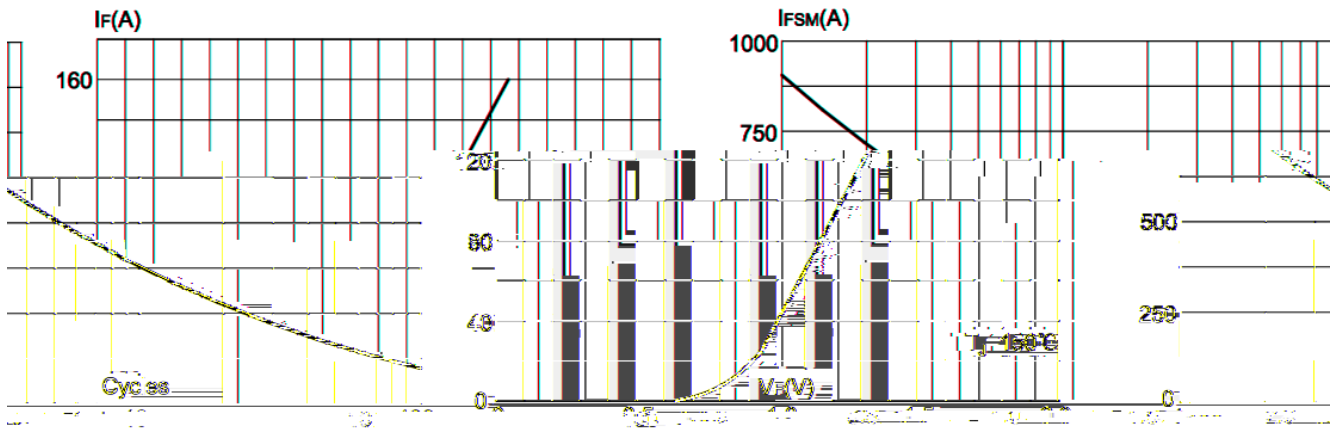


FIG.4: Maximum transient thermal impedance

FIG.3: Forward current vs. case temperature

