℃		

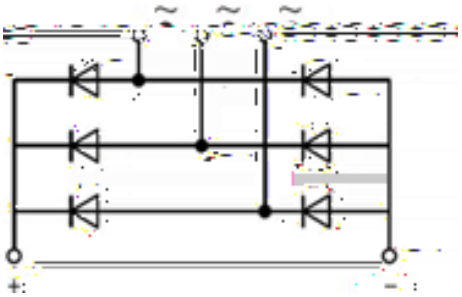

FIG.1: Forward characteristics(per diode)

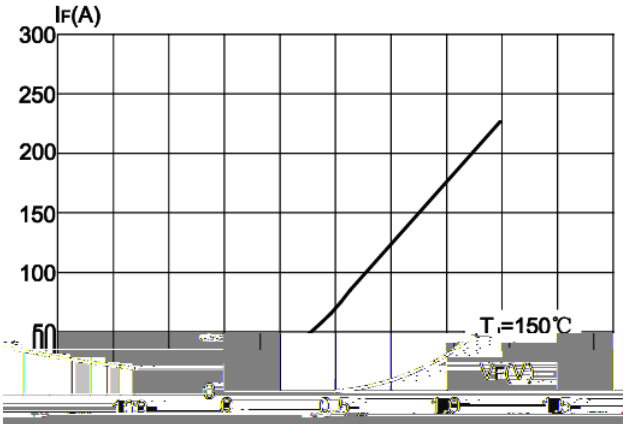

FIG.2: Peak on-state surge current

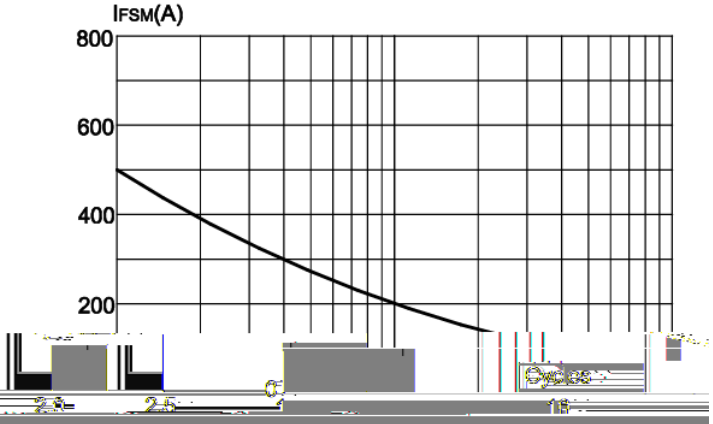

sient thermal impedance
o-case(per diode)

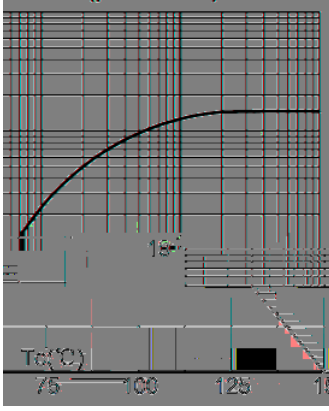

FIG.3: Forward current vs. case temperature

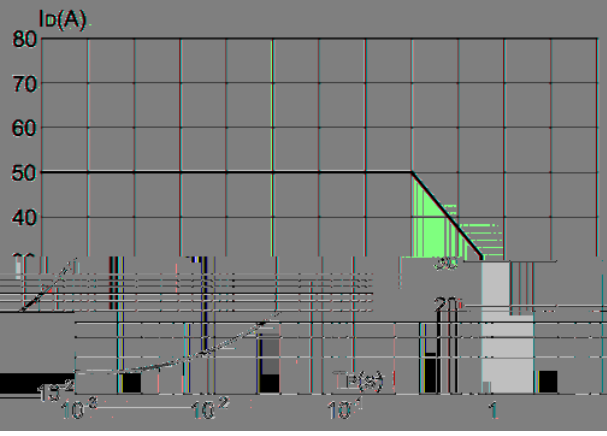

FIG.4: Maximum tran
Junction-t

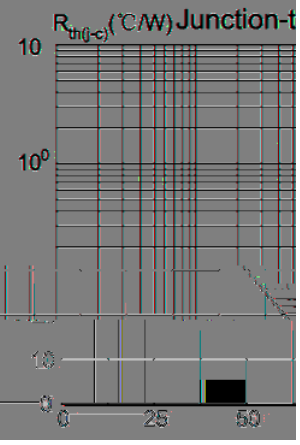

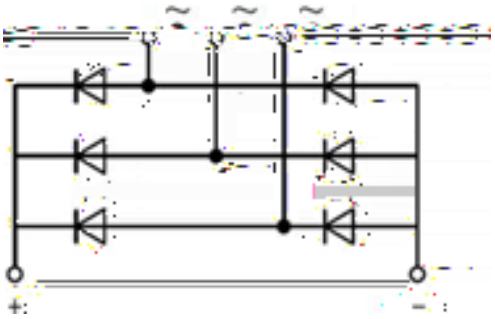

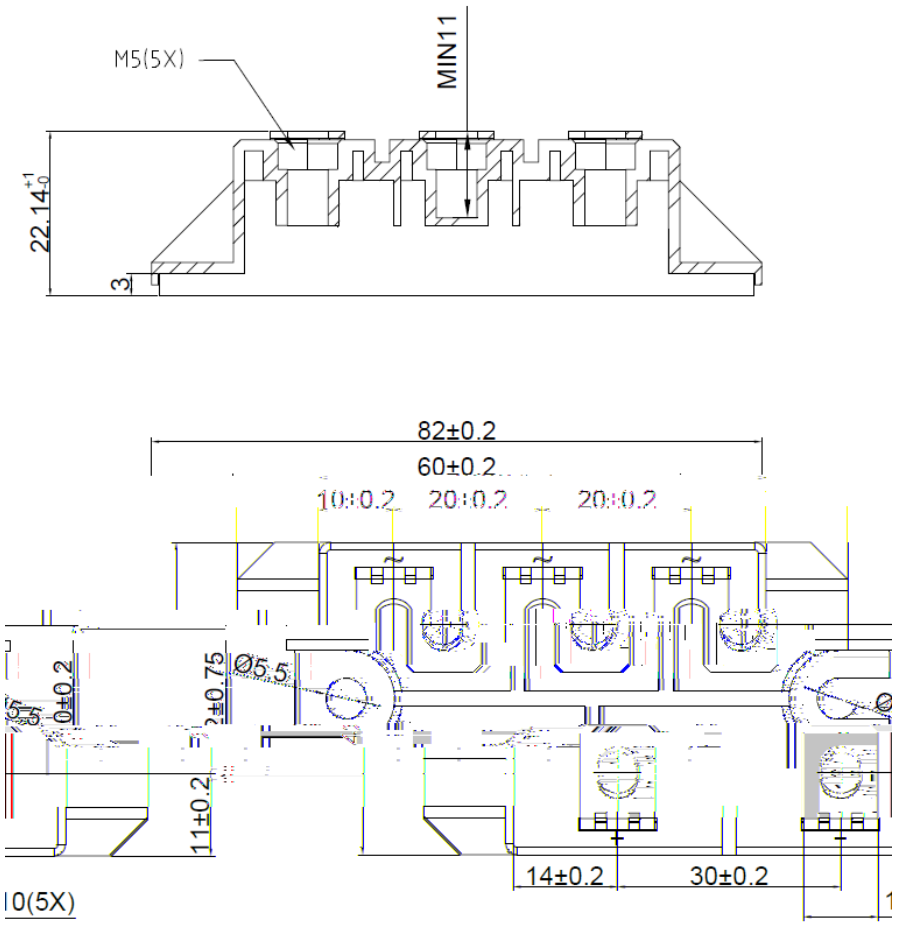
M5(5X)
MIN11
22.14
3
82±0.2
60±0.2
10±0.2
20±0.2
20±0.2
Ø5.5
11±0.2
14±0.2
30±0.2
10(5X)