



BE (C).L)



əg Eg mđ

Ylm k

H g m l K m e Y

HY Ye l	Ydm	Mf á
°C		

hhđ Yəfk

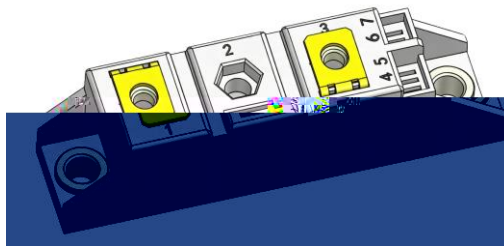

kgđł E Ypæ nē J Yłf k

HY Ye l	gf áəfk	K e gd	Ydm k	Mf á
	°C			

gd	Ydn k			Mf á
	E f &	L h&	E Yp&	
				Ω

gd	Ydn k			Mf á
	E f &	L h&	E Yp&	

L ha Yd d l a Yd L e Yd Y Y I &lak

FIG.1: Forward characteristics(per diode)

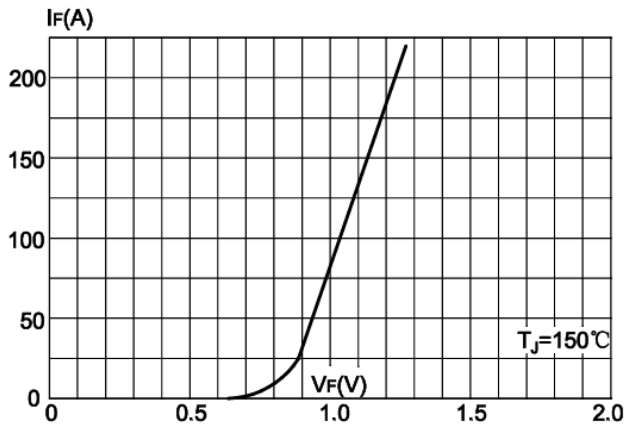


FIG.2: Peak on-state surge current



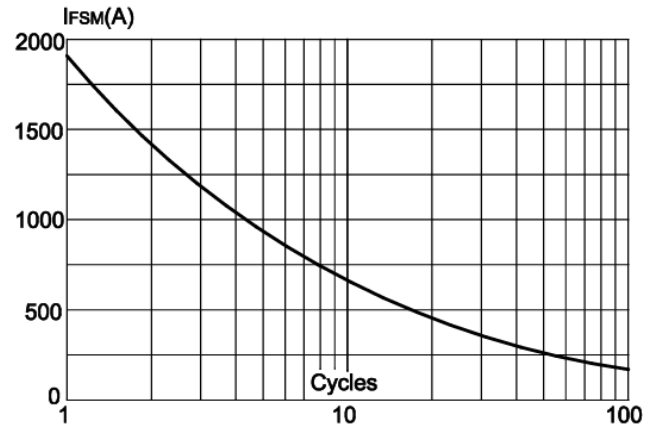


FIG.3: Forward current vs. case temperature

FIG.4: Maximum transient thermal impedance

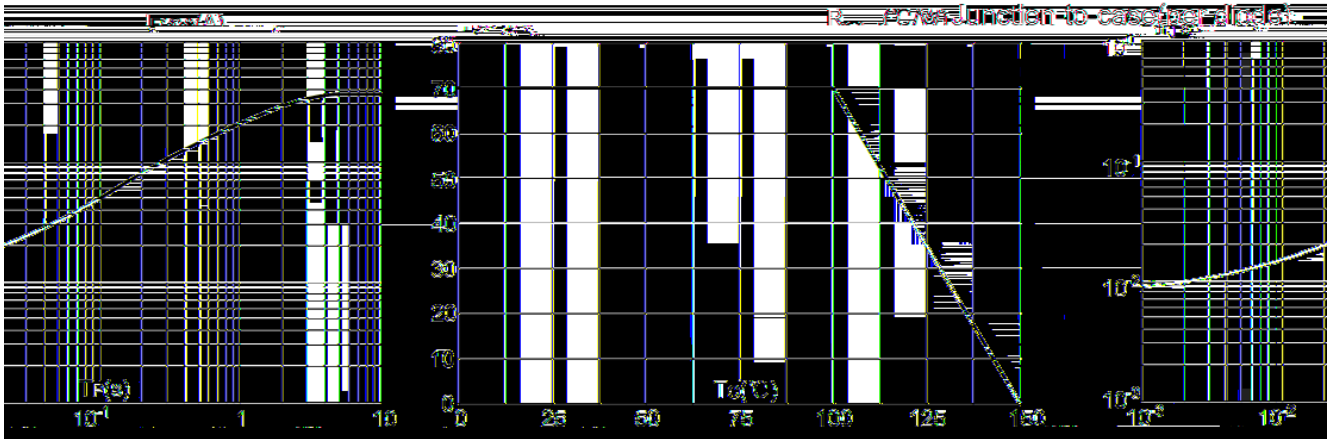


a m ā Yē

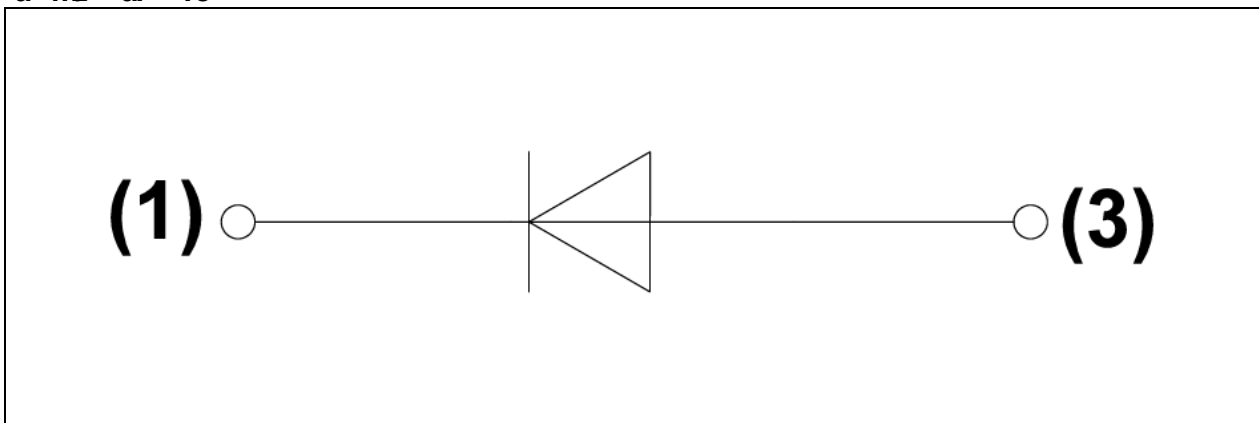



BE (C).L)

HY cY Gmldf k e e !

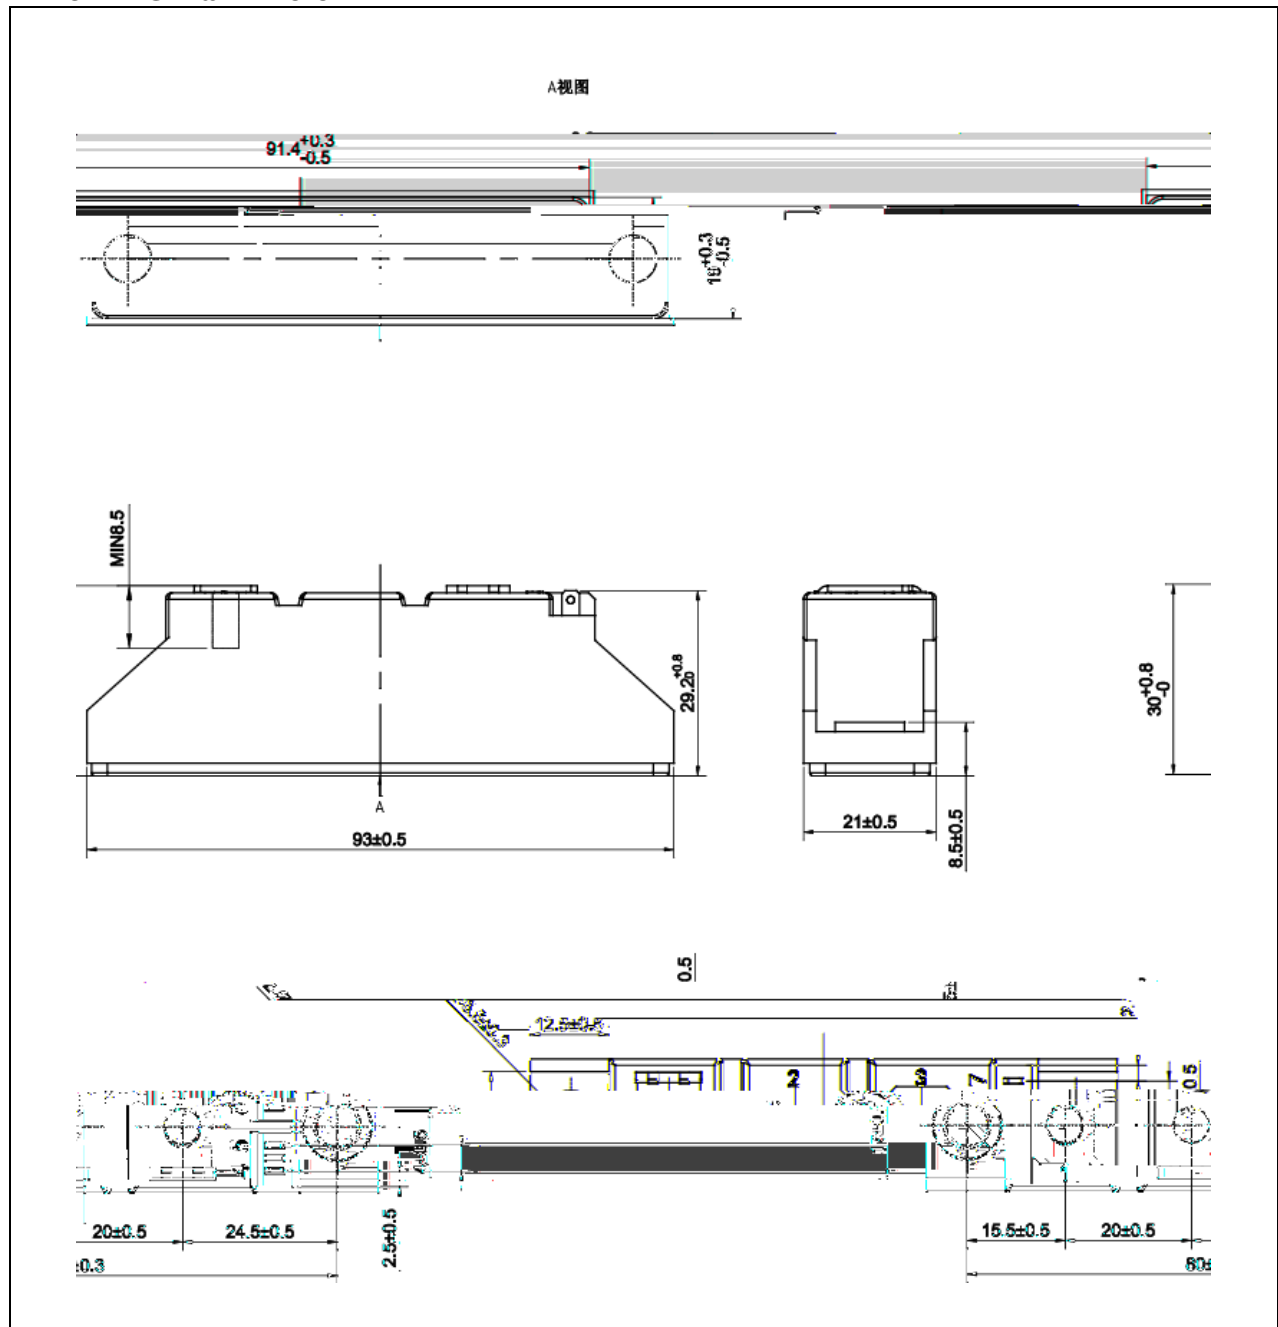



BE (C). L)

