



7

G

C

F



7

G

8

C		F				H
			!	G !	!	
	°C					
	°C					
	°C					
						Ω

G

C		F				H
			!	G !	!	

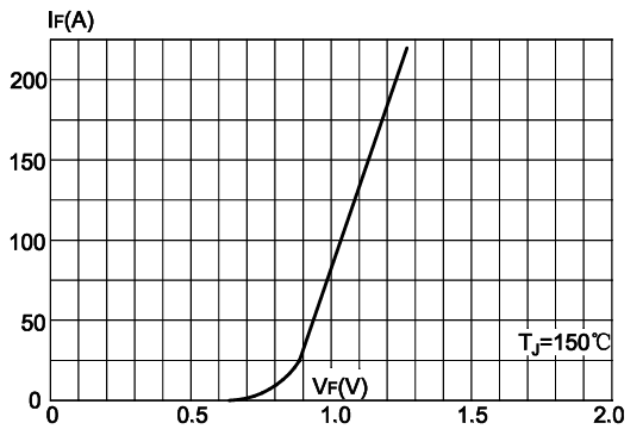
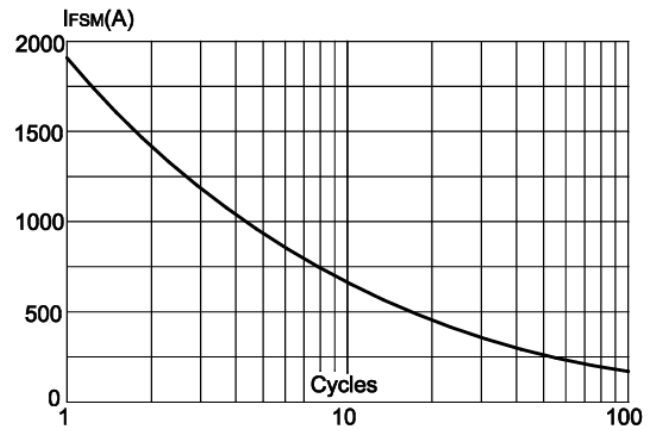
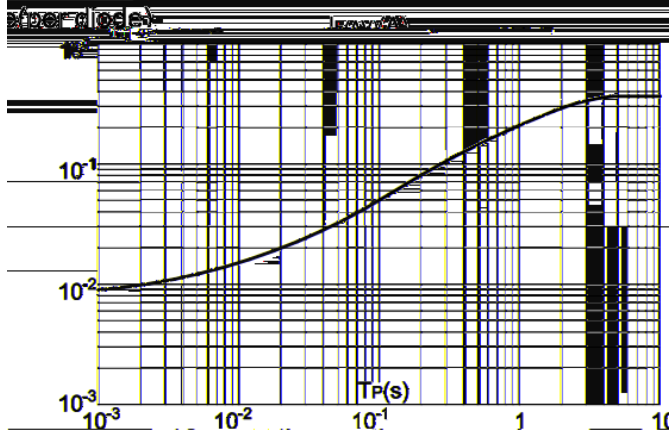
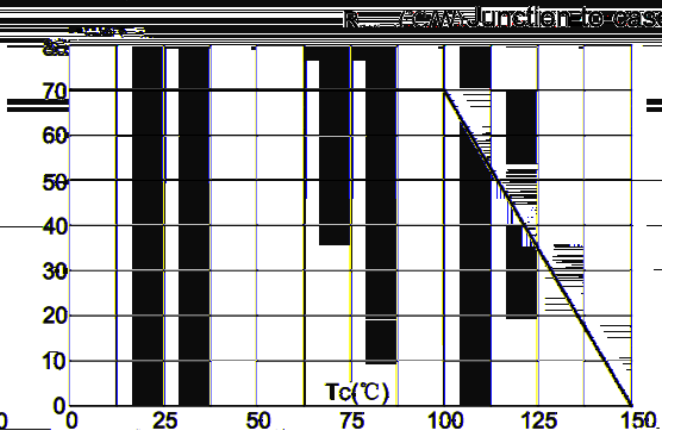
B

7		C			C

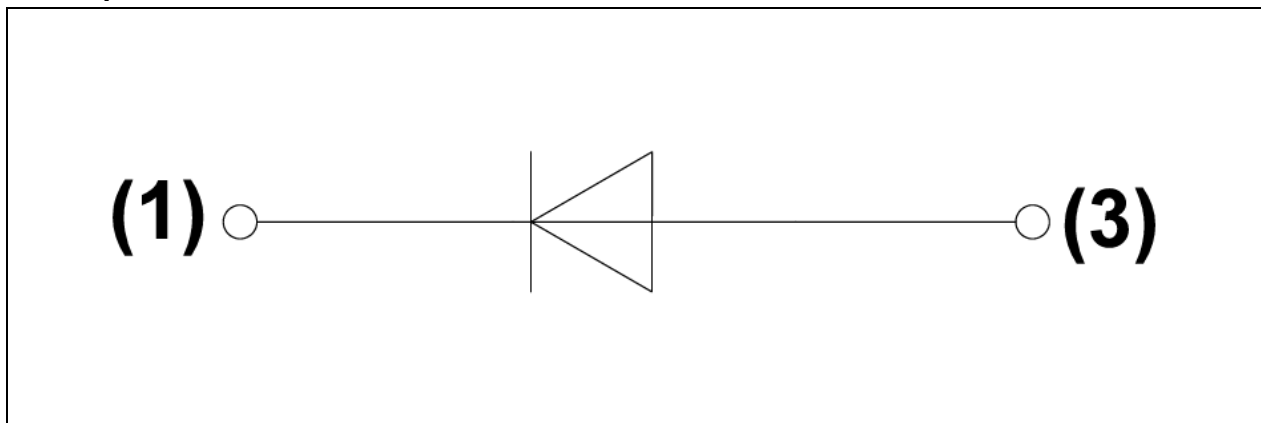
G

8

G

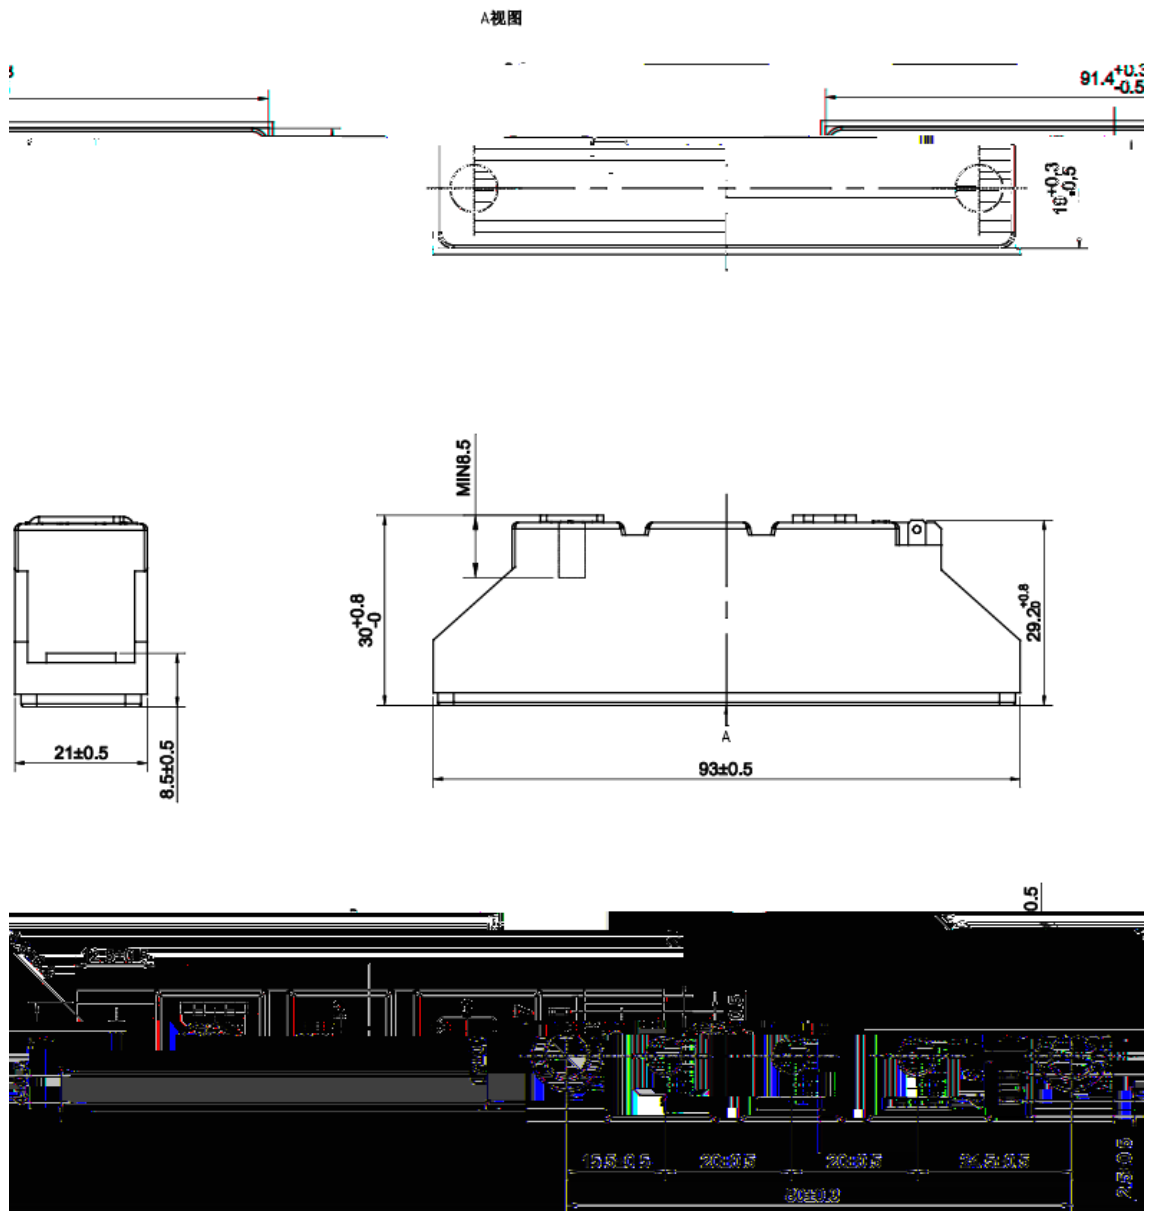
FIG.1: Forward characteristics(per diode)

FIG.2: Peak on-state surge current

FIG.3: Forward current vs. case temperature

FIG.4: Maximum transient thermal impedance


7



C

B





7

G

