	℃					
	℃					
	℃					
						Ω

FIG.1: Forward characteristics(per diode)

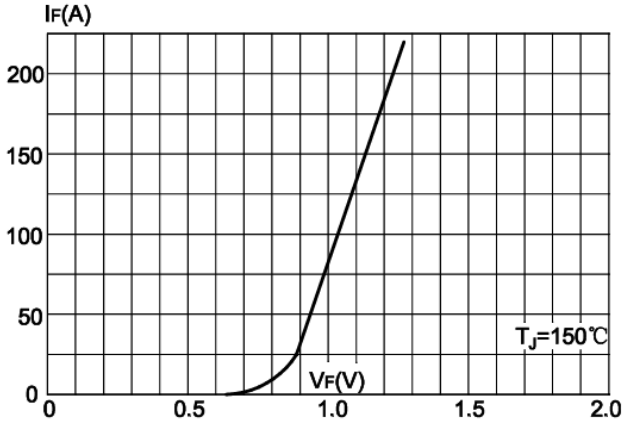

FIG.2: Peak on-state surge current

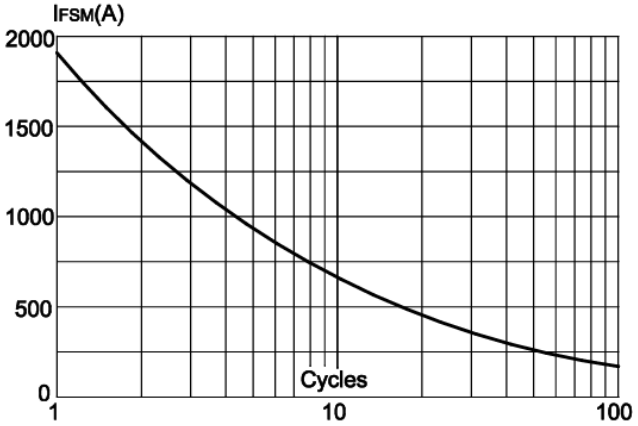

FIG.3: Forward current vs. case temperature

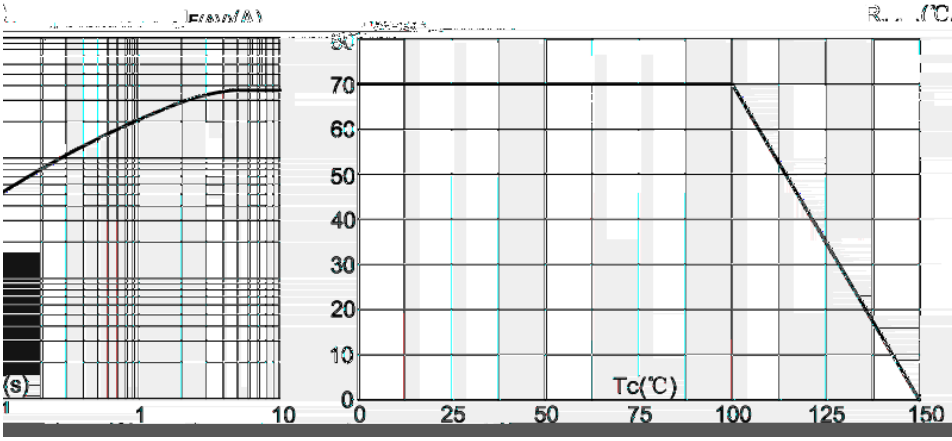

FIG.4: Maximum transient thermal impedance

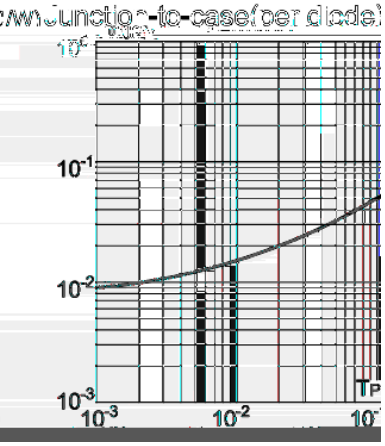

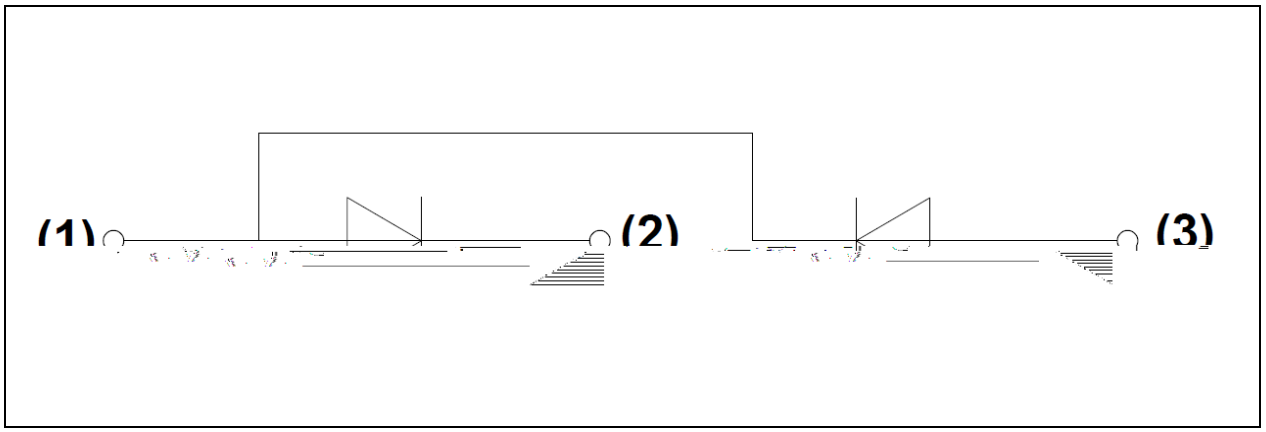

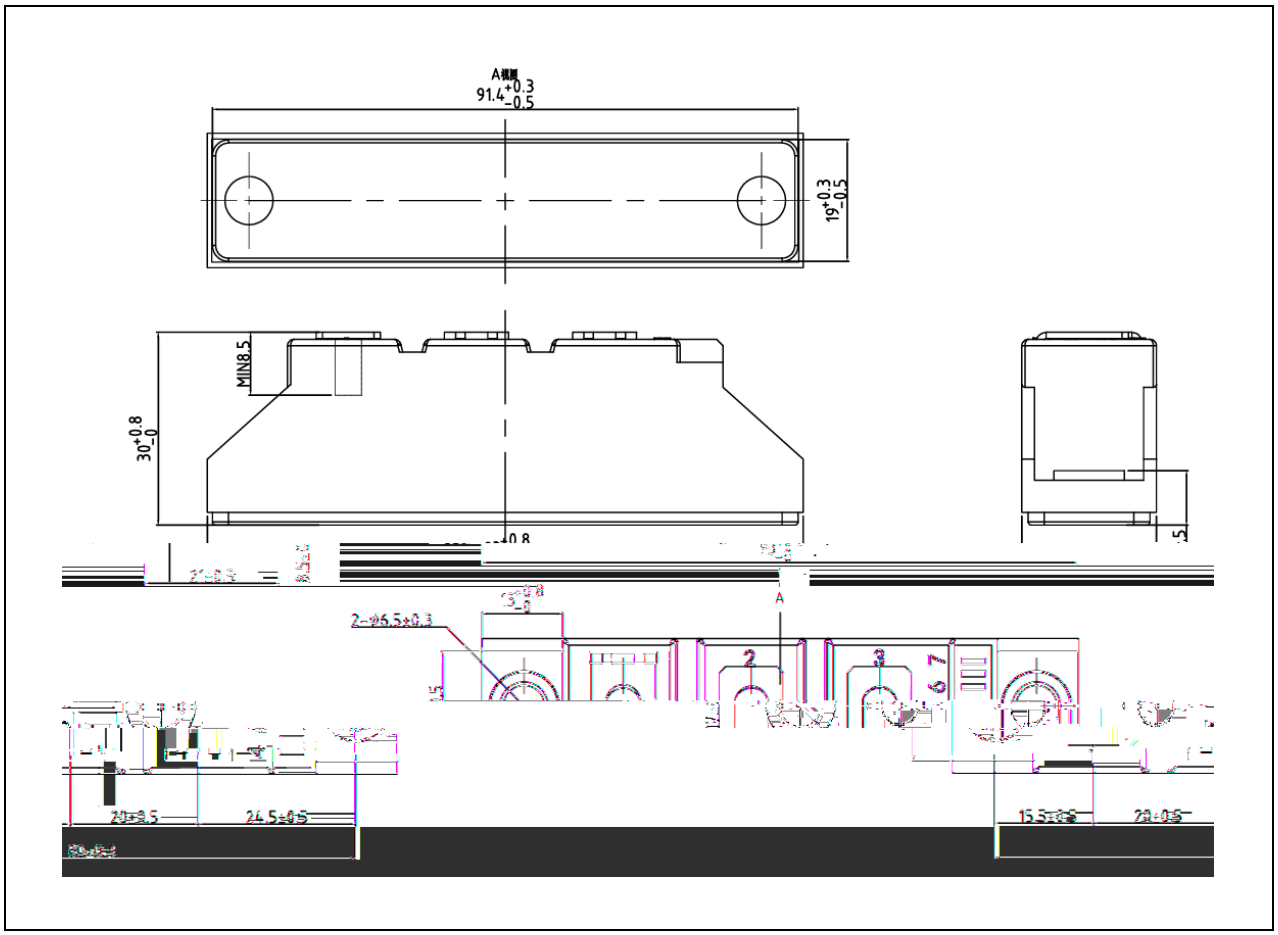
A視圖
91.4+0.3 −0.5
19+0.3 −0.5
MIN8.5
30+0.8 −0
2-φ5.5±0.3
A
20±0.5
24.5±0.5
15.5±0.5
20±0.5