



BE (C).L)O

Ylm k

H g mIKmē e Y

hhā Yāfk

kgdñ E Ypæ nē JYāf k

HY Ye I	gf āāfk	K e gd	Ydn k	Mf ā



d l aYd YYI ðlak

HY Ye l	gf áæfk	K e gd	Yðn k			Mf á
			E f &	L h&	E Yp&	
	°C					
	°C					
	°C					
						Ω

L eYd YYI ðlak

HY Ye l	gf áæfk	K e gd	Yðn k			Mf á
			E f &	L h&	E Yp&	

G ð Å ge Yæf

na	EY cð	HY cY	O a l	Åf gp	H Ylgf



L ha Yd d l a Yd L e Yd Y Y I &lak

FIG.1: Forward characteristics(per diode)




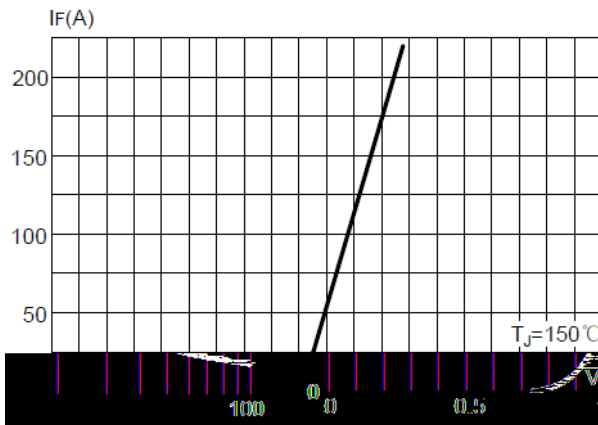



FIG.2: Peak on-state surge current

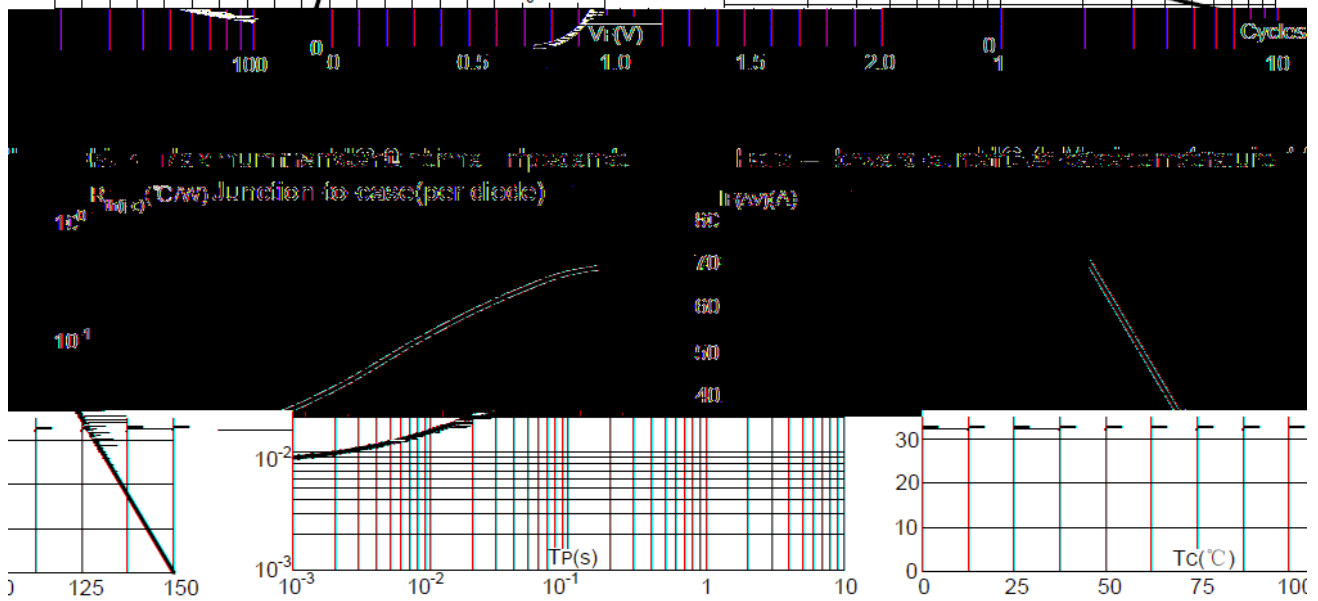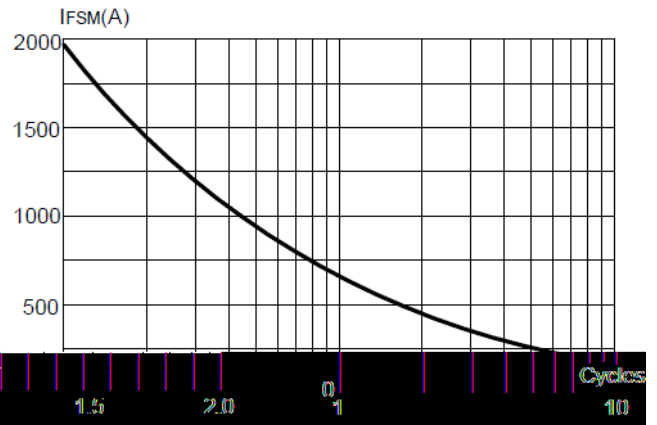

a mē āY Ye

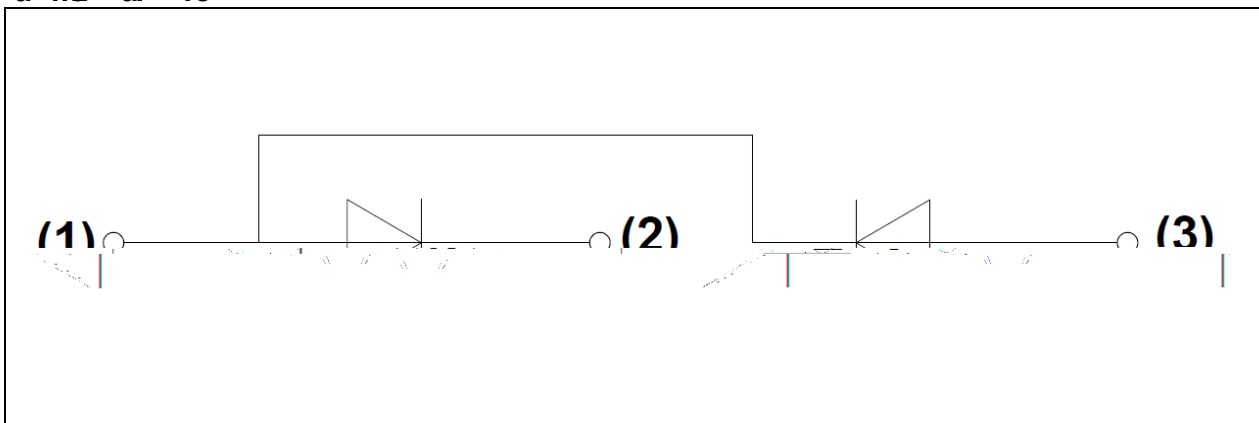

HY cY Gmldf k e e!

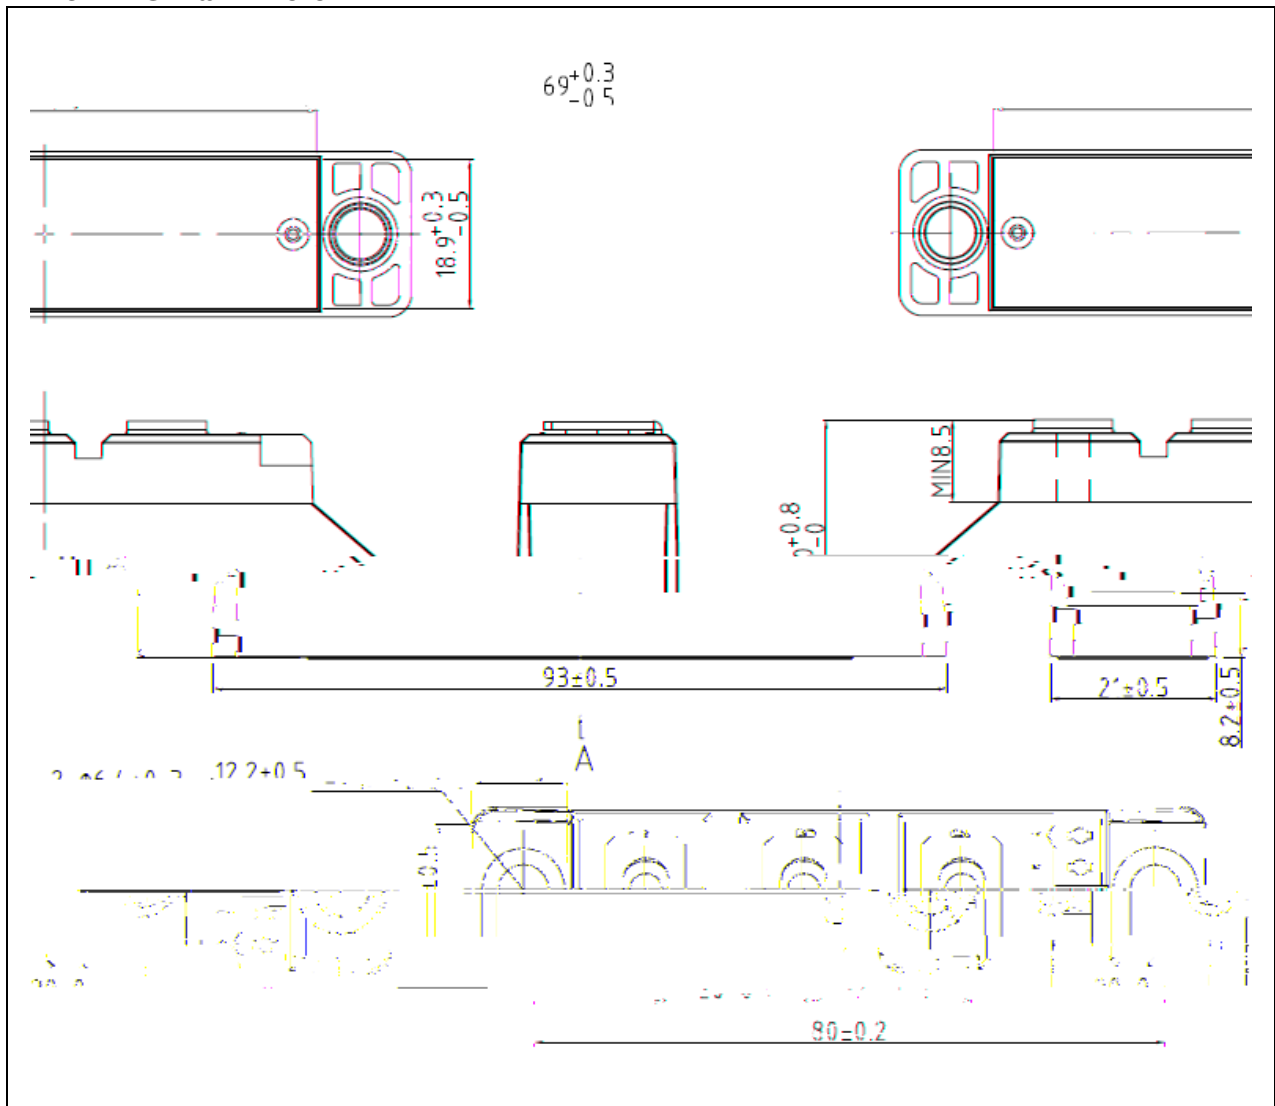



BE (C).L)O