




| °C |  |  |
|----|--|--|
|    |  |  |
|    |  |  |



|  | °C |  |  |  |
|--|----|--|--|--|
|  |    |  |  |  |
|  |    |  |  |  |
|  |    |  |  |  |
|  |    |  |  |  |

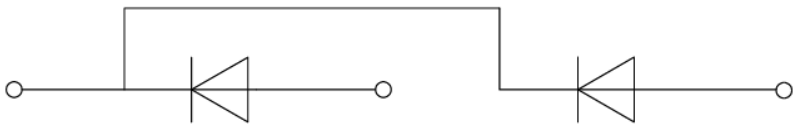

|  | °C |  |  |  |  |   |
|--|----|--|--|--|--|---|
|  | °C |  |  |  |  |   |
|  | °C |  |  |  |  |   |
|  |    |  |  |  |  | Ω |



**FIG.1: Forward characteristics(per diode)**



**FIG.2: Peak on-state surge current**

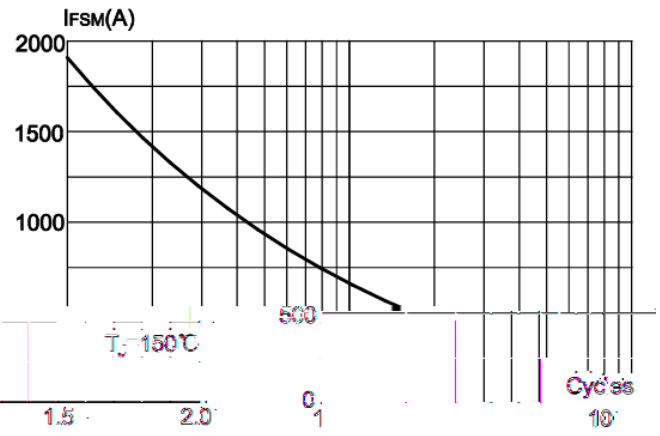


**FIG.3: Thermal resistance (per diode)**

