





|  | °C |  |  |  |  |   |
|--|----|--|--|--|--|---|
|  | °C |  |  |  |  |   |
|  | °C |  |  |  |  |   |
|  |    |  |  |  |  | Ω |

FIG.1: Forward characteristic (acrossed)

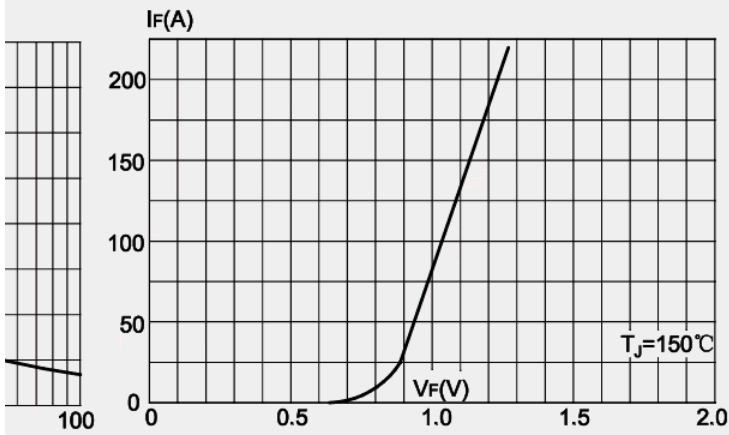


FIG.2: Pulse reverse current vs. pulse width

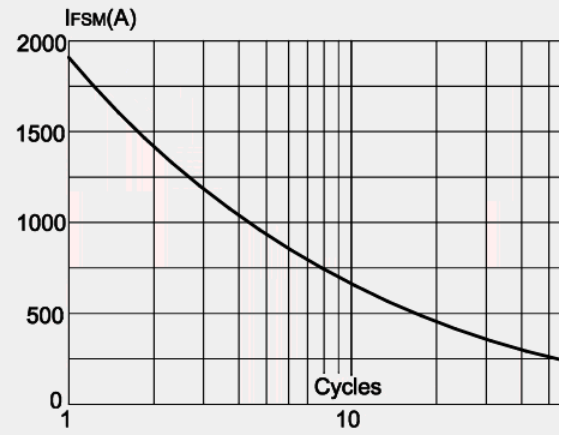


FIG.3: Forward current vs. case temperature

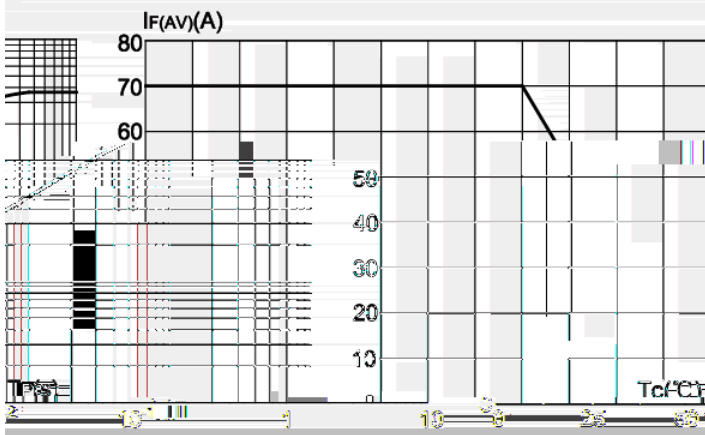


FIG.4: Maximum transient thermal impedance Junction-to-case(per diode)

