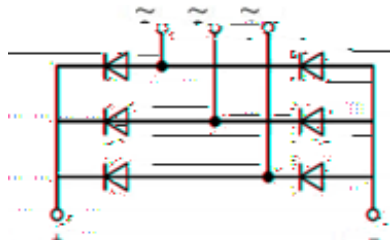




. (



8



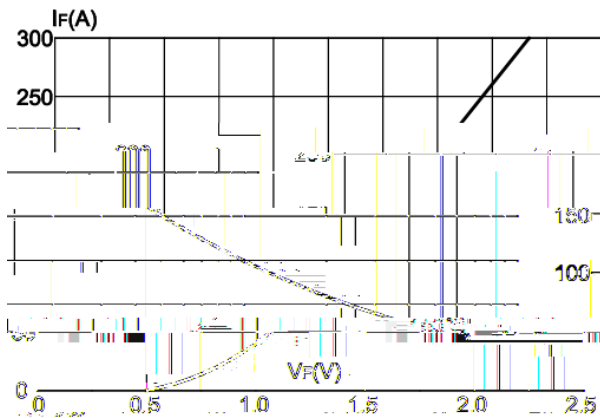
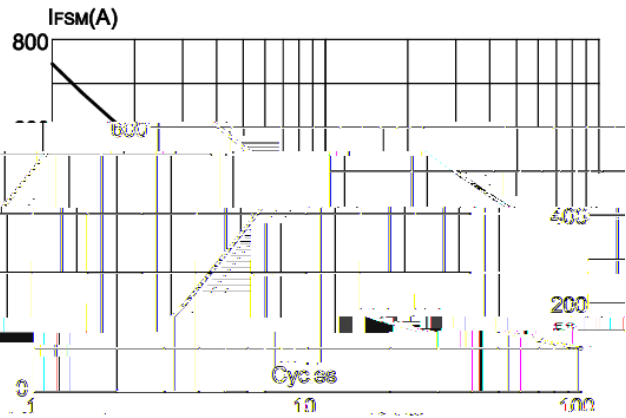
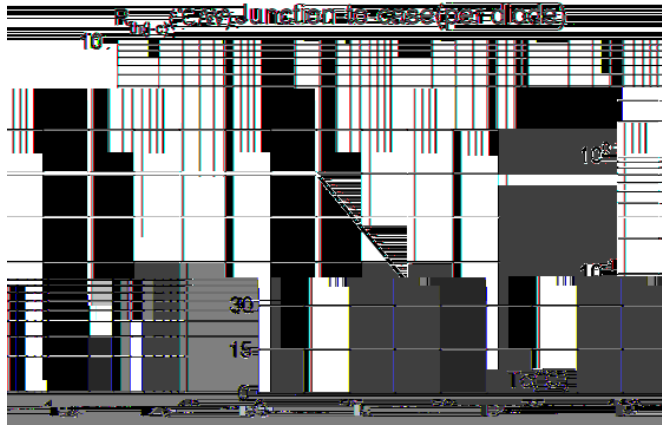
8

	°C			
	°C			
				°C



	°C					
	°C					
	°C					
	°C					

						°C

FIG.1: Forward characteristics(per diode)

FIG.2: Peak on-state surge current

FIG.3: Reverse characteristics(per diode)

FIG.4: Reverse recovery characteristics
