




☐		☐
☐		
☐		☐



		☐		☐
		☐		
	°C, per diode			
☐				
				°C

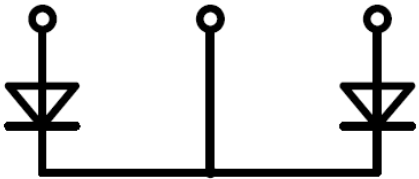

		☐				☐
	☐ ☐					
	☐ ☐					
	☐ ☐					
	☐ ☐					
	☐ ☐					
	☐ ☐					
	☐ ☐					

FIG.1: Forward voltage drop vs forward current

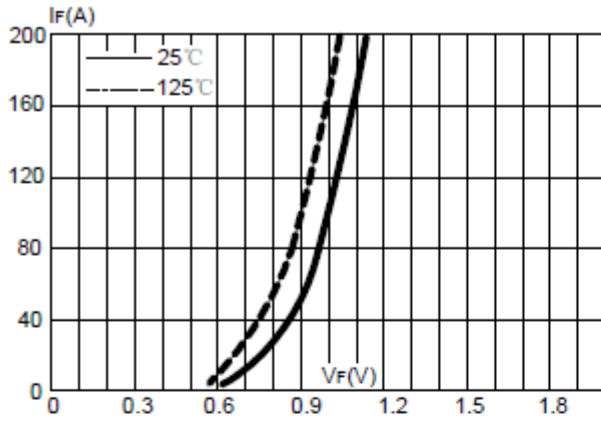


FIG.2: Reverse recovery time vs dI_F/dt

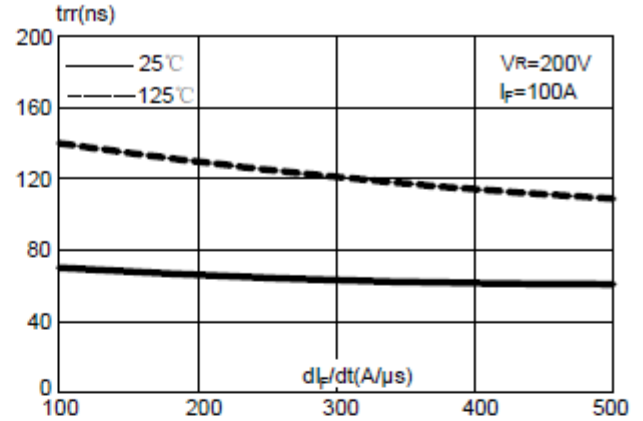


FIG.3: Reverse recovery current vs dI_F/dt

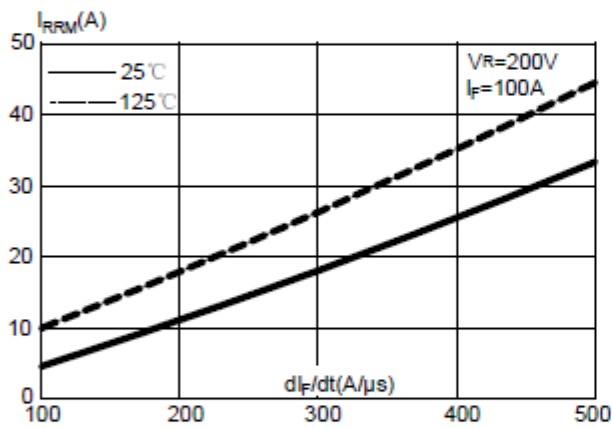


FIG.4: Forward current vs case temperature

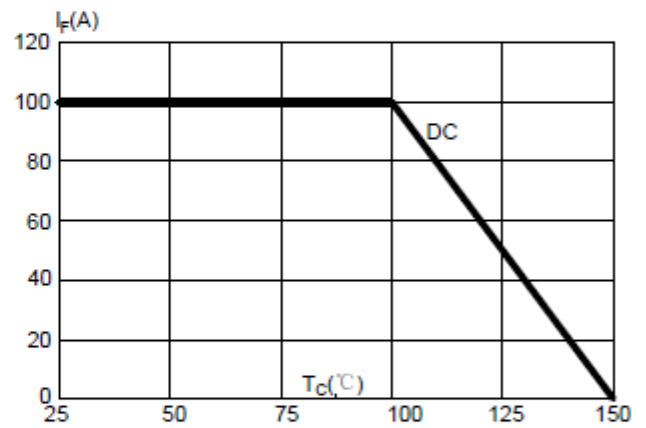


**FIG.5: Maximum transient thermal impedance
Junction-to-case(per diode)**

