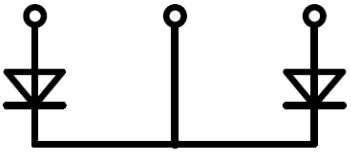

	℃，per diode			
				℃

FIG.1: Forward voltage drop vs forward current

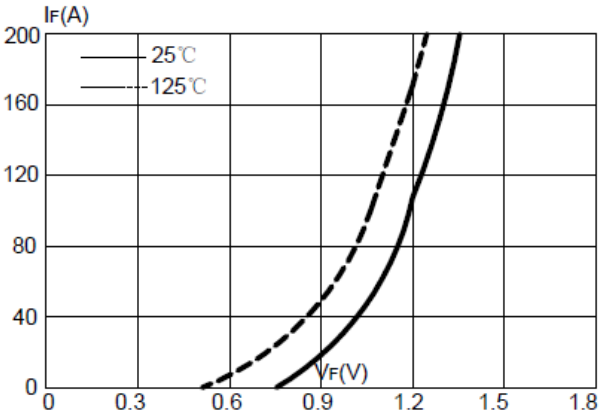

FIG.2: Reverse recovery time vs dI_F/dt

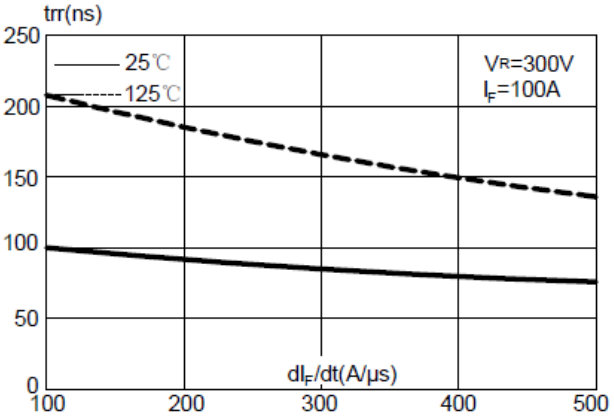

[redacted]

FIG.5: Maximum transient thermal impedance Junction-to-case(per diode)

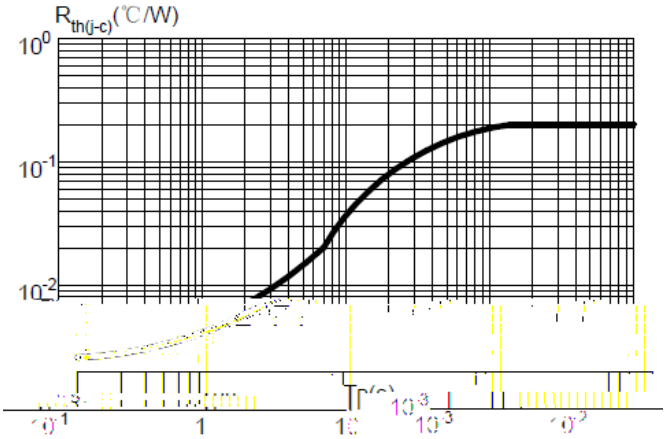

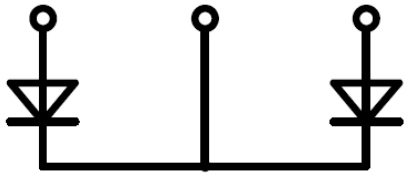

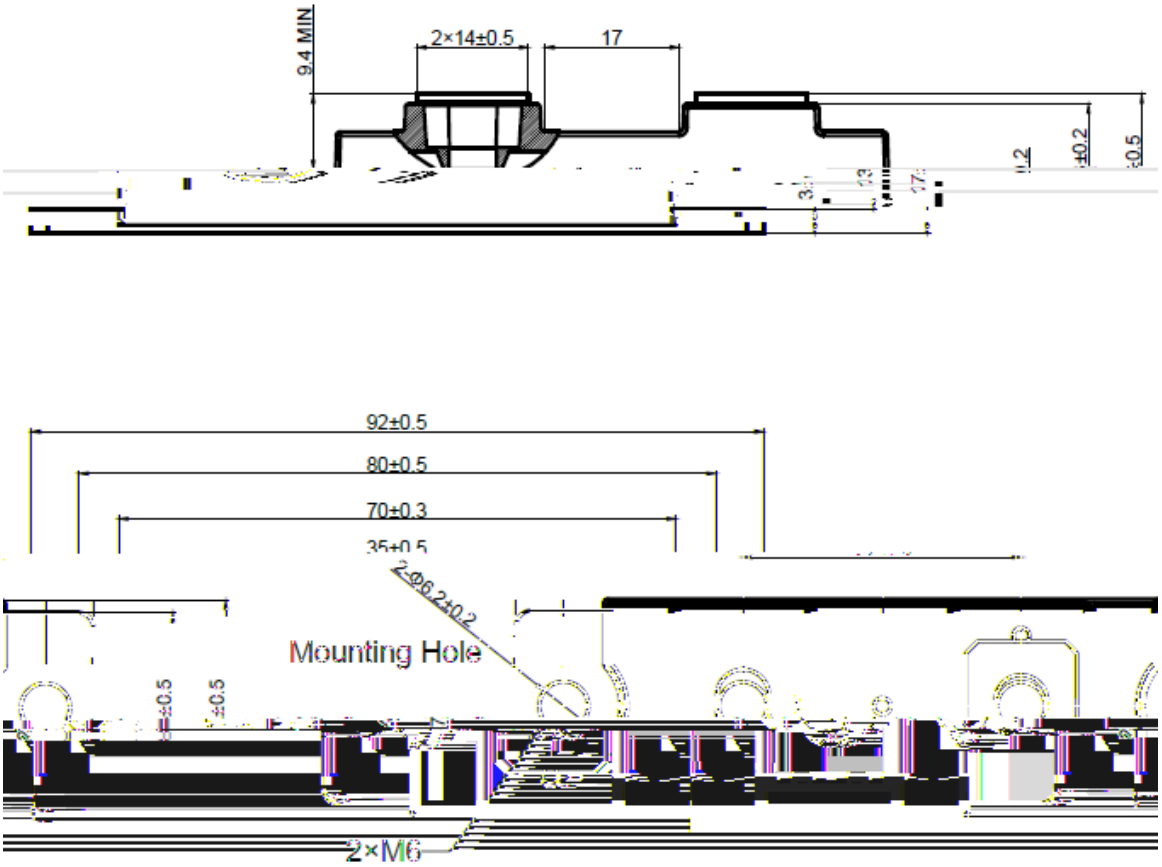
9.4 MIN
2×14±0.5
17
92±0.5
80±0.5
70±0.3
35±0.5
2-Φ6.2±0.2
Mounting Hole
±0.5
±0.5
2×M6