




/		
» 0		



-) -) -	-			
-) ,))	)			
	) ,			
) .) ,) ,))	. - °C, per diode			
,) ,				
,) ,))				
)) ,))				°C




	-					
	-					
/ ,) -) ,))	-					
	-					



FIG.1: Forward voltage drop vs forward current

FIG.2: Reverse recovery time vs di_F/dt

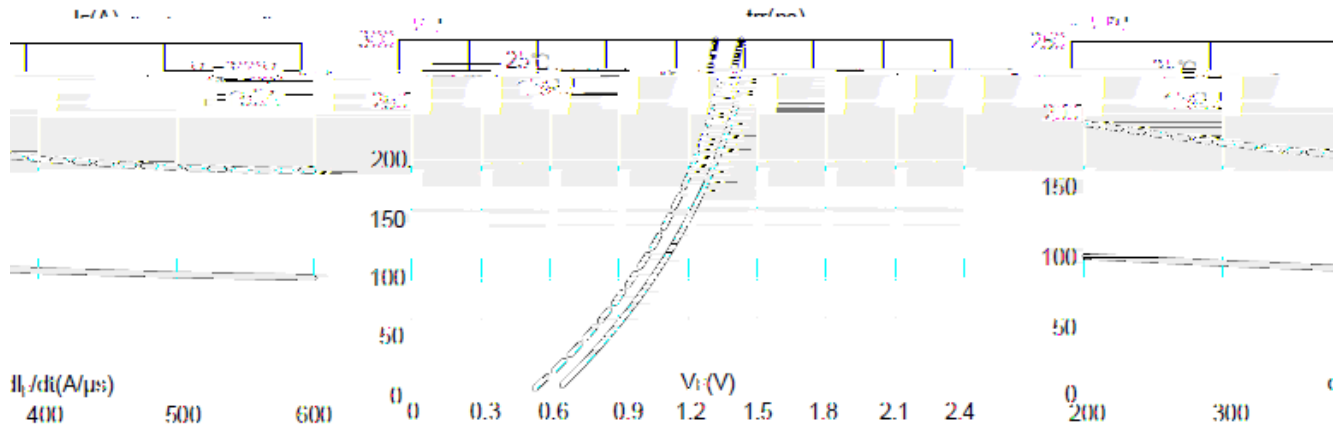

Forward current vs case temperature

FIG.3: Reverse recovery current vs di_F/dt

FIG.4: Forward current vs case temperature

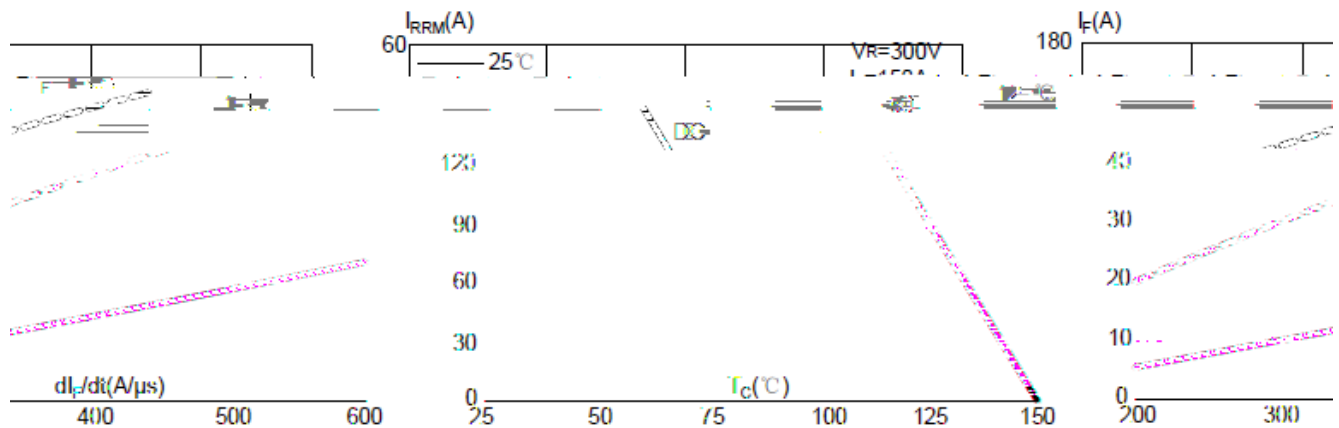


FIG.5: Maximum transient thermal impedance

