	℃			
				℃

	℃					
	℃					
	℃					
	℃					
	℃					
	℃					
	℃					
	℃					

FIG.1: Power dissipation vs. on-state current

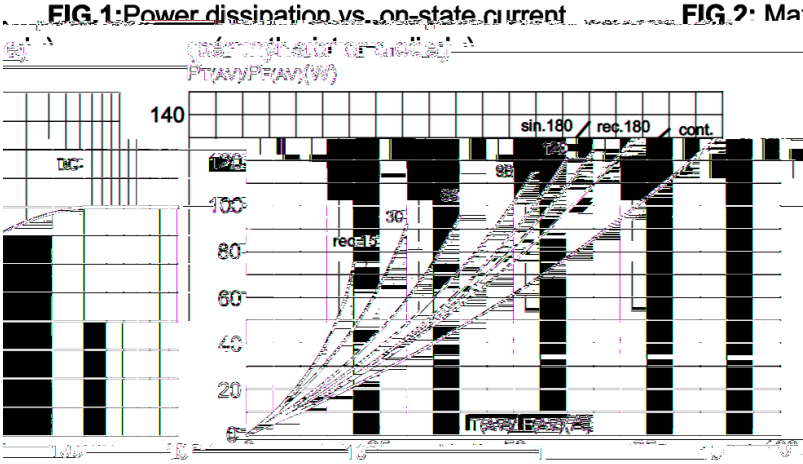

FIG.2: Maximum transient thermal impedance

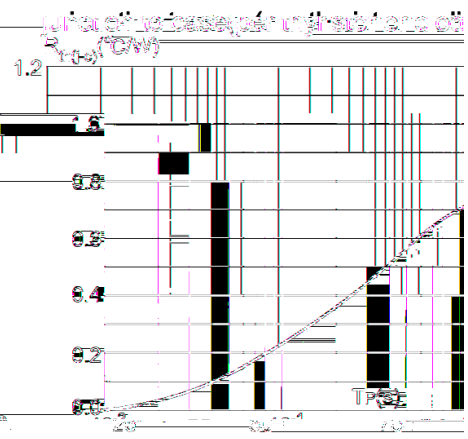

FIG.3: Forward characteristics

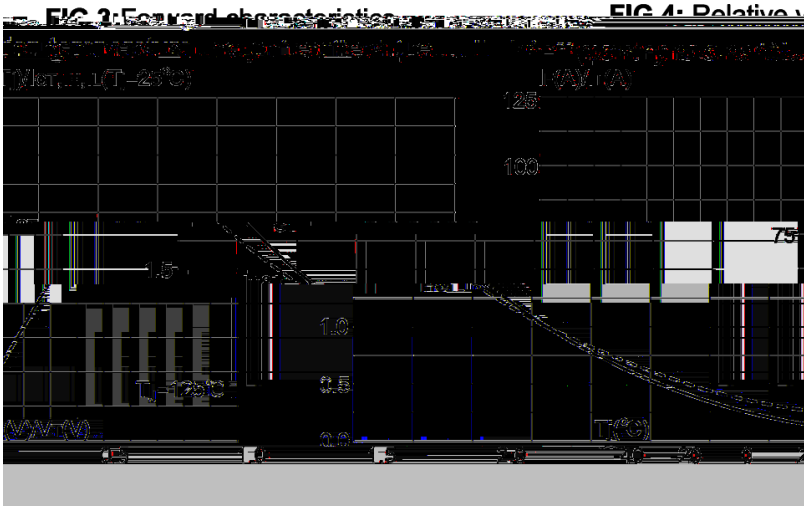

FIG.4: Relative variations of gate trigger current, holding

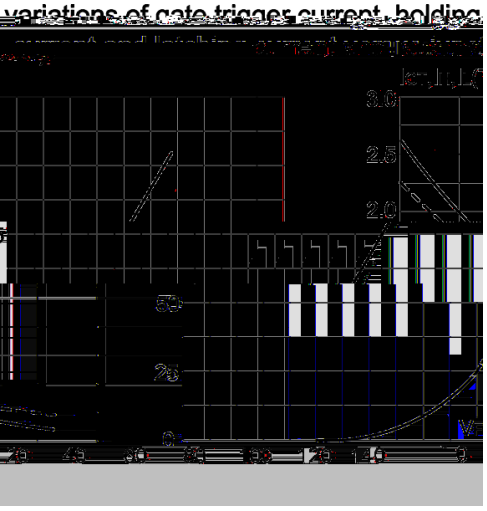

FIG.5: Gate trigger and holding current

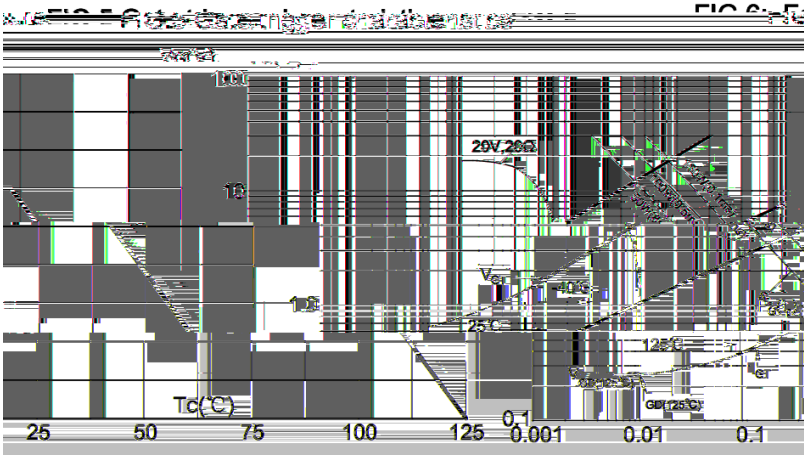

FIG.6: Forward current vs. case temperature

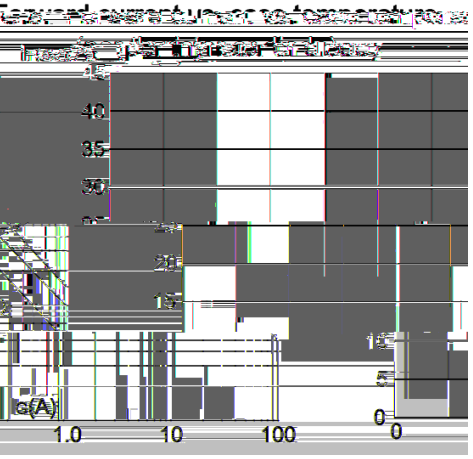

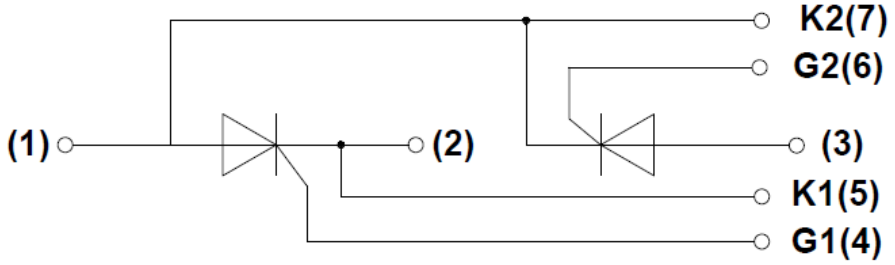
K2(7)
G2(6)
(1)
(2)
(3)
K1(5)
G1(4)

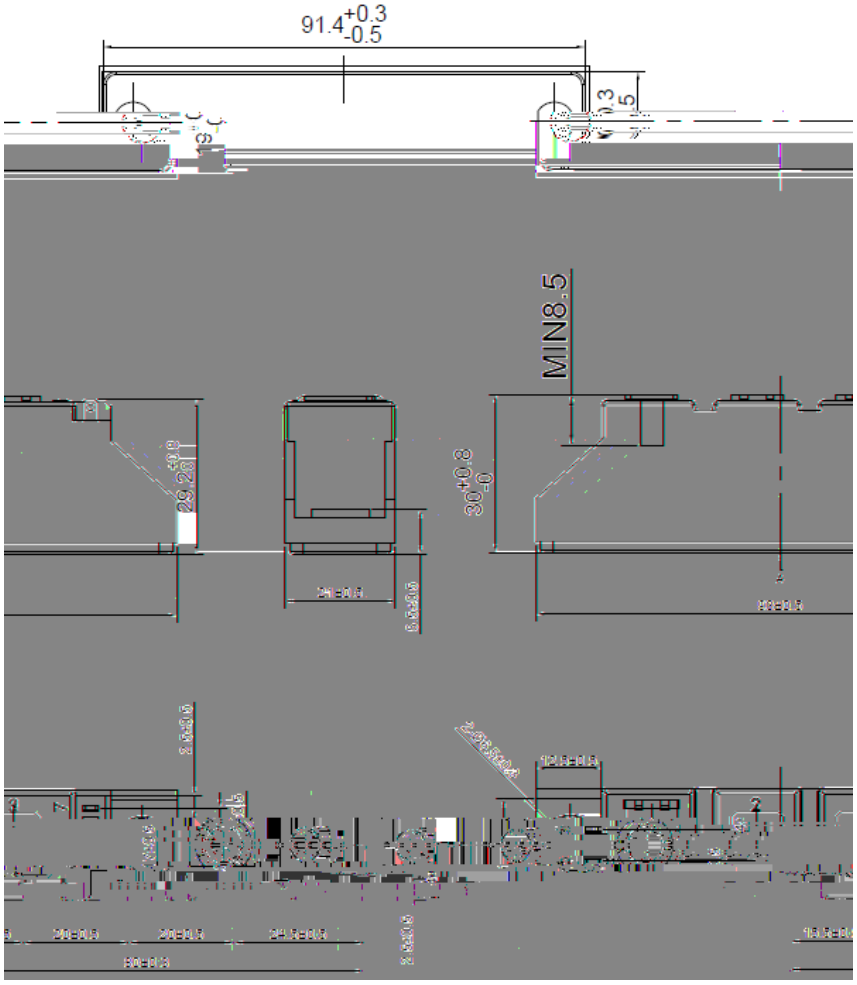
91.4 +0.3 -0.5
MIN8.5
30 +0.8 -0